




# Bearing Fault Detector

## Monitor and Detect Bearing Faults to Avert Catastrophic Failure

### Highlights

- Provides Early Warning of Bearing and Gear Faults
- Detects Impacting Associated with Spalling, Cracking, and Lubrication Problems
- Outputs 4 to 20 mA Signals for Peak Acceleration and Overall Vibration
- Operates with PLC, DCS, SCADA, Alarm, and Control Systems
- Offers Analog Output Signal for Spectral Analysis and Diagnostics
- Conducts Continuous Vibration Monitoring — 24/7
- Accepts Input from ICP® Accelerometers
- Patented Technology
- Easy to Install

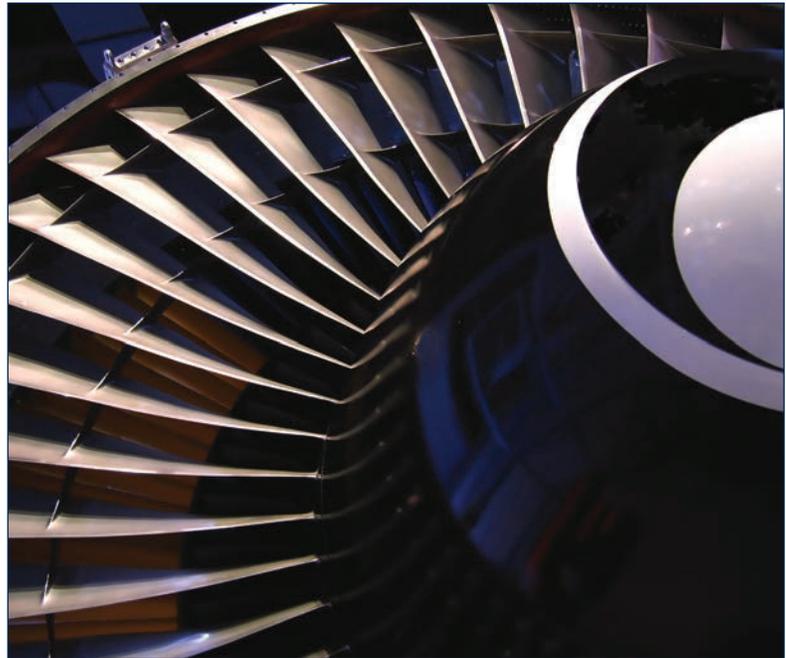

**Model 682C05**  
 Bearing Fault Detector  
 \*(US Patent Number 6,889,553)

Model 682C05 Bearing Fault Detector (BFD) is an advanced vibration signal conditioner designed to provide the earliest warning of imminent machinery failure. The unit works with a 100 mV/g ICP® accelerometer and serves to deliver two, 4 to 20 mA output signals that are proportional to the measured vibration levels of operating rotating machinery. In order to enable detection of a wide variety of machinery faults, the 4 to 20 mA signals are conditioned to characterize two, unique vibration measurements; one containing high frequency peak data and the other containing low frequency rms data. These 4 to 20 mA signals may be monitored, alongside other plant process variables, using familiar PLC, DCS, SCADA, alarm, and control systems. An additional analog voltage output signal is provided for spectral analysis of the monitored vibration for fault diagnostic purposes.

The unit employs a patented signal conditioning technique that provides the unique ability to detect bearing and gear problems at their earliest stages, thus permitting ample maintenance planning to avert a catastrophic failure. The simplified 4 to 20 mA signal monitoring approach represents a cost effective alternative to complex vibration monitoring instrumentation and associated training.

As with all IMI instrumentation, this equipment is complemented with toll-free applications assistance, 24-hour customer service, and is backed by a no-risk policy that guarantees satisfaction or your money refunded.






## Introduction

Machinery vibration monitoring has long been recognized as an effective practice for detecting mechanical problems that ultimately cause machinery failure and downtime. Unfortunately, many instrumentation systems that are intended to assist the maintenance engineer with vibration analysis are complex — and require considerable training and experience in order to interpret measurement data. Too often, companies may encounter the loss of an experienced maintenance engineer due to downsizing or attrition — leaving critical machinery to run without being monitored and expensive analysis equipment to lay idle.

In recent years, industrial accelerometers have advanced in performance capability and declined in price, making their deployment for machinery vibration monitoring a more attractive undertaking. Additionally, vibration transmitters, with 4 to 20 mA output signals, have permitted vibration monitoring to occur with plant process control equipment, such as PLCs, alarm, and control systems, thus reducing the expense, complexity, and risk of talent loss associated with sophisticated vibration analysis. Although not as precise as analog vibration signal analysis, overall vibration level monitoring with IMI Sensors' 4 to 20 mA transmitters is effective for providing early warning of machinery trouble.

## Why use IMI Sensors' 4 to 20 mA vibration transmitters?

Industrial plants rely on monitoring, control, and alarm systems for interrogating many process variables, such as flow, level, temperature, pH, and pressure. Although a variety of communication protocols are in use, 4 to 20 mA transmitters are the common source for the measurement data of interest. When machinery vibration is considered within the list of variables in need of evaluation, the existing infrastructure of process monitoring and control instrumentation becomes an attractive choice for data examination. To accommodate this, a variety of 4 to 20 mA vibration transmitters have been introduced. These transmitters may be incorporated within the vibration sensor — or separately housed in a signal-conditioning package. Depending on the amplitude and frequency of the vibration to be monitored, the vibration data can be most successfully characterized in acceleration, velocity or displacement units of measure — so the output format of a vibration transmitter should be selected accordingly for best results.

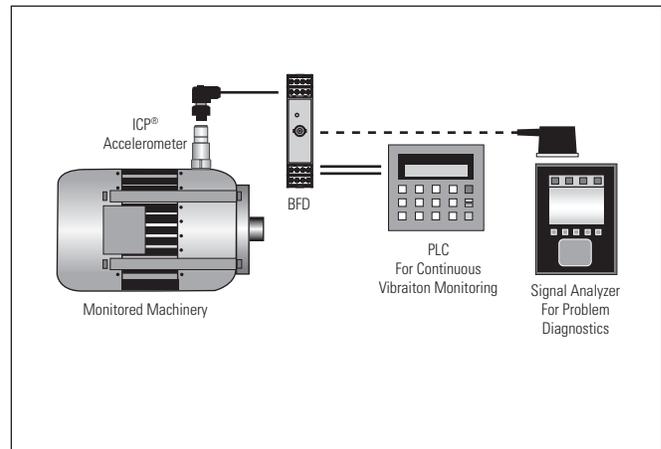

## What makes IMI Sensors' BFD different?

The IMI Sensors Model 682C05 BFD is a signal conditioner characterized as a separately housed vibration transmitter. The unit mounts to DIN rail and accepts an analog vibration signal as generated from a 100 mV/g ICP® accelerometer. Three different vibration output signals are provided by the BFD —

- The raw, analog voltage signal generated by the accelerometer
- A linear, 4 to 20 mA signal proportional to overall rms or peak vibration and expressed as either acceleration or velocity
- A linearly scaled, 4 to 20 mA signal proportional to true peak acceleration

It is the measurement of true peak signal that makes the BFD unique, powerful, and patented.


The benefit of this unique measurement is its ability to detect short duration pulses or impacts that are indicative of bearing and gear problems. Because they are short in duration they have little influence on a typical overall vibration signal. This unique capability enables the BFD to provide the earliest warning of bearing and gear problems through an ordinary 4 to 20 mA signal. This permits the user to initiate the diagnostic and maintenance process sooner in order to avoid a catastrophic and costly machinery failure.

## What are the signal conditioning techniques utilized by the BFD?


Output signal type (1) is the raw, analog voltage signal generated by the accelerometer. Since the BFD is scaled to operate with a 100 mV/g ICP® accelerometer, this output signal will be approximately 100 mV/. More precision can be achieved by using the sensitivity supplied with the accelerometer at the



measurement device. This analog signal is provided on the BNC jack output connector and is useful for spectral (FFT) analysis of the vibration signal for fault diagnostics. Output signal type (2) is a 4 to 20 mA signal proportional to overall, rms or peak vibration. Internal selection switches allow a choice of acceleration or velocity measurements, peak or rms values, and a variety of fixed measurement ranges. The signal generated by the accelerometer is initially processed through a 1 kHz low pass filter. Then when set for velocity, the BFD passes this filtered signal through an integration circuit. When set for acceleration, the filtered signal bypasses the integration circuit. At the next stage, the signal passes through a true RMS conversion circuit. Finally, a gain stage provides scaling of the velocity or acceleration signals to one of a variety of fixed full-scale measurement ranges. Another gain adjustment converts the rms measurement value to a calculated peak (1.414 x rms) measurement value, if desired. This overall vibration signal is a useful indicator of faults that occur at machine running speeds, such as imbalance, misalignment, and looseness.

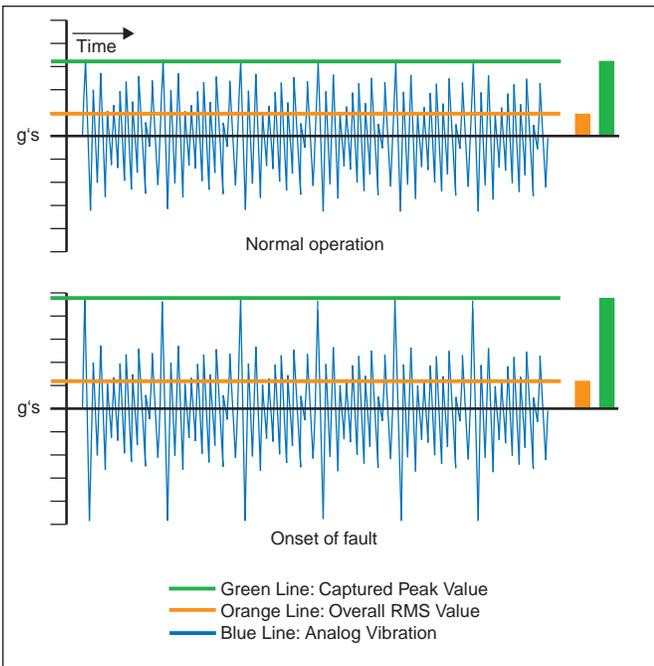


Output signal type (3) is a linearly scaled, 4 to 20 mA signal proportional to true peak acceleration. The signal generated by the accelerometer is passed through a high pass filter, selectable at either 1 kHz or 5 kHz, depending upon machine running speed, and then rectified. The peak acceleration value that occurs within a 7-second window is then captured by a high speed sample and hold circuit and converted to a 4 to 20 mA output signal. A new value is captured during the next window and a refreshed peak output value is generated every 7 seconds. This peak acceleration signal is a useful indicator of impacting or high-frequency energy bursts — characteristic of the early stages of bearing and gear faults, such as spalling, friction, fatigue, cracking, contamination, and lubrication problems.

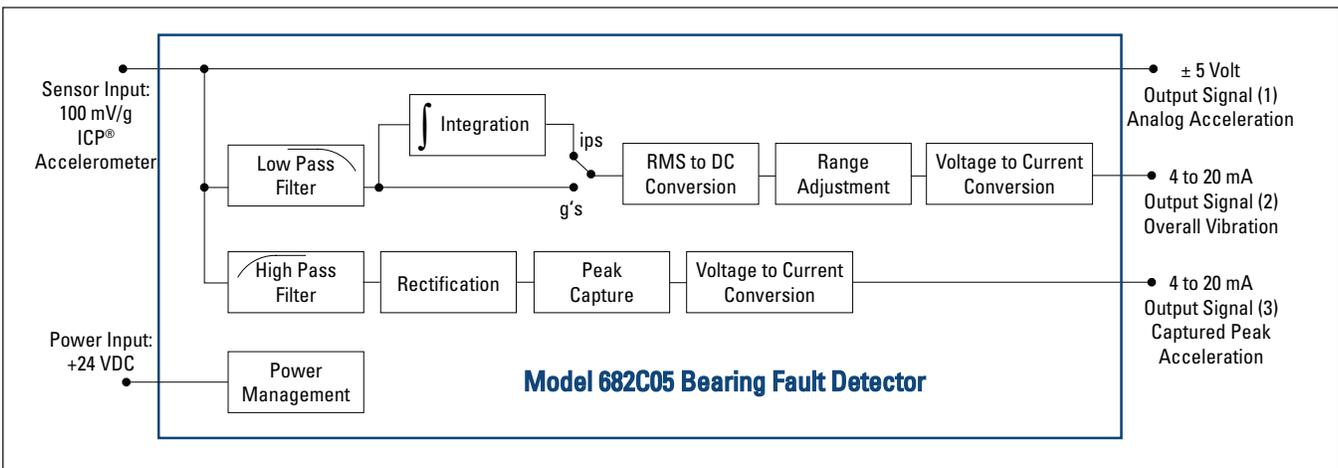




Model		682C05	
Performance		English	SI
Channels		1	1
Input Signal (ICP® Accelerometer)		100 mV/g	10.2 mV/m/s <sup>2</sup>
Output Signals			
Raw, Analog Vibration		100 mV/g	10.2 mV/m/s <sup>2</sup>
Overall Vibration (range is user scalable)		4 to 20 mA	4 to 20 mA
Captured Peak Acceleration (± 50 g)		4 to 20 mA	4 to 20 mA
Measurement Range			
Raw, Analog Vibration		± 50 g	± 491 m/s <sup>2</sup>
Overall Vibration set for Acceleration (selectable)		5.0, 10.0, 20.0 g pk or rms	
Overall Vibration set for Velocity (selectable)		0.5, 1.0, 2.0 ips pk or rms	
Captured Peak Acceleration		± 50 g pk	± 491 m/s <sup>2</sup> pk
Frequency Range			
Raw, Analog Vibration		as per sensor used	as per sensor used
Overall Vibration		10 to 1000 Hz	10 to 1000 Hz
Captured True Peak Acceleration		1 or 5 kHz to 100 kHz	1 or 5 kHz to 100 kHz
Time Constant / Refresh Rate (Captured Peak)		7 sec	7 sec
Environmental			
Temperature Range (Operating)		+32 to +159 °F	0 to +70 °C
Temperature Range (Storage)		-40 to +257 °F	-40 to +125 °C
Humidity Range (Non-Condensing)		<95 %	<95 %
Electrical			
Power Required		24 VDC	24 VDC
Current Draw (Max)		150 mA	150 mA
Settling Time (Max)		1 min	1 min
Excitation Voltage (Delivered to Sensor)		24 VDC (± 1 VDC)	24 VDC (± 1 VDC)
Constant Current Excitation (to Sensor)		4 mA (± 1 mA)	4 mA (± 1 mA)
Physical			
Electrical Connector (Input/Output/Power) (Raw, Analog Vibration Output)		Removable Screw Terminals BNC Jack	Removable Screw Terminals BNC Jack
Wire Size Accommodated at Screw Terminals		24-14 AWG	24-14 AWG
Status Indicator (Power On)		Green	Green
Housing Material		Polyamide	Polyamide
Size (h x w x d)		3.9 x 0.9 x 4.5 in	99 x 22.5 x 114.5 mm
Weight		5.2 oz	145.2 gm
Mounting		1.38 in DIN Rail	35 mm DIN Rail

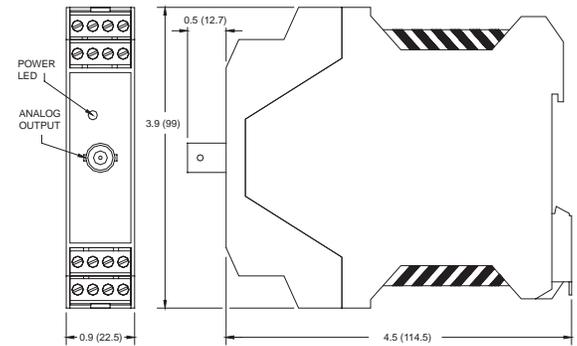

Dimensions shown are in inches (millimeters)

### Bearing Fault Detector Output

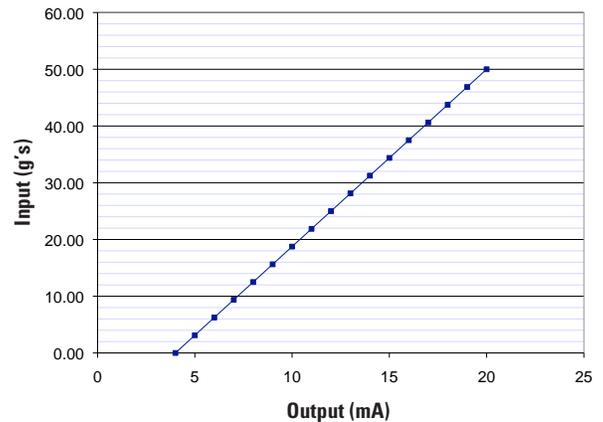

3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in the USA 800-959-4464

24-hour SensorLine<sup>SM</sup> 716-684-0003

Fax 716-684-3823 ■ Email [imi@pcb.com](mailto:imi@pcb.com)

Website [www.pcb.com/imi-sensors](http://www.pcb.com/imi-sensors)

ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2018 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. SensorLine<sup>SM</sup> is a servicemark of PCB Piezotronics, Inc. PCB Piezotronics, Inc. was acquired by MTS Systems Corporation in 2016 and merged with its sensors division – MTS Sensors.

IMI-682B05-0118

Printed in U.S.A.



IMI Sensors designs and manufactures a full line of accelerometers, sensors, vibration switches, vibration transmitters, cables and accessories for predictive maintenance, continuous vibration monitoring, and machinery equipment protection. Products include rugged industrial ICP® accelerometers, 4-20 mA industrial vibration sensors and transmitters for 24/7 monitoring, electronic and mechanical vibration switches, the patented Bearing Fault Detector, high temperature accelerometers to +1300 °F (+704 °C), 2-wire Smart Vibration Switch, and the patented Reciprocating Machinery Protector. CE approved and intrinsically safe versions are available for most products.

Visit [www.pcb.com/imi-sensors](http://www.pcb.com/imi-sensors) to locate your nearest sales office.