


Airborne charge amplifiers

Model 2680M1-M7

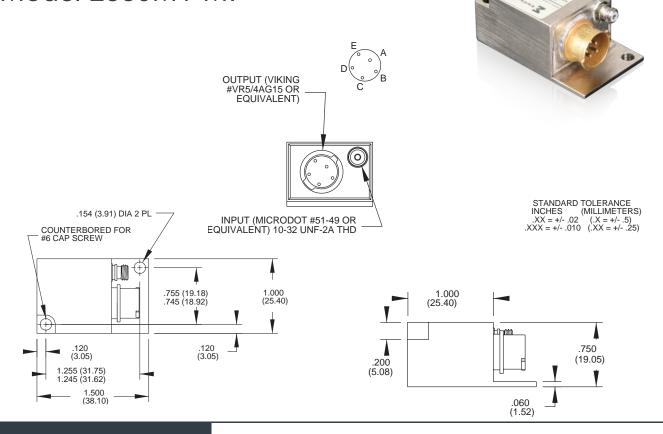

Key features

- For use with piezoelectric transducers
- Small, rugged, light weight
- Dual outputs, biased and unbiased
- Adjustable gain
- Optional low pass filter

Description

Models 2680M1-XXX through 2680M7-XXX charge amplifiers are designed for use with piezoelectric trans-ducers and are suitable for airborne applications. Hybrid microcircuit construction results in small size, ruggedness and low power consumption. The airborne charge amplifiers have an output voltage propor-tional to the input charge. As a result, the amplifier sensitivity is not appreciably affected by the capacitance of the input cable.

The use of modular construction techniques permits great versatility in gain and filter choices. This unit has two outputs, a biased output and an unbiased output. Both outputs are adjustable with a common gain control. The M1 through M7 defines the charge gain per Table 1.

The -XXX describes the upper cutoff frequency (-5% point) per Table 2. For example, a -101 has a low pass filter which is flat up to 100 Hz, a -502 has a low pass filter which is flat up to $5000 \, \text{Hz}$.



Airborne charge amplifiers | Model 2680M1-M7

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at $+75^{\circ}F$ ($+24^{\circ}C$) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.


| Specifications | | | |
|--|--|--|--|
| Inputs | | | |
| Туре | Piezoelectric single-ended with one side connected to signal ground | | |
| Source resistance | 3 M Ω minimum | | |
| Source capacitance | 10 000 pF max | | |
| Overload recovery | A half sine pulse of 1ms duration and with an amplitude as specified in Table 1 (or less) will | | |
| | cause no spurious effects at the amplifier output other than clipping. | | |
| Outputs | | | |
| Туре | Both biased and unbiased outputs are single-ended with one side connected to circuit ground | | |
| Load impedance | The parallel combination of both outputs load resistors shall be 10 $k\Omega$ or greater to | | |
| | specifications. | | |
| Output impedance | Biased output | 50 Ω max, direct coupled | |
| | Unbiased output | $50~\Omega$ max, in series with at least 16 μF | |
| DC output bias voltage | Biased output | 2.50 V ±3% with load resistances of 10 k Ω minimum | |
| | Unbiased output | 0.00 V +0.050 V / -0.00 V | |
| Linear output voltage | Biased output | 4.65 V pk-pk minimum with 10 k Ω load | |
| • | Unbiased output | 4.65 V pk-pk minimum with 1 M Ω load | |
| | • | 4.25 V pk-pk minimum with 10 kΩ load | |
| Limited output voltage (biased output) | 0.00 V +0.075/-0.00 | 0 V and 5.30 V +0.00/-0.30 V | |
| Limited output current (both output) | | imum with 10 kΩ load | |
| Transfer Characteristics | | | |
| Gain range | Adjustable as specifi | ied in Table 1 | |
| Gain stability | 0.05% maximum change per 1000 pF change in source capacitance at the input | | |
| Gain stability with supply voltage | 0.25% maximum with changes in supply voltage over the specified limits | | |
| Frequency response | The gain at the upper and lower cutoff frequencies is 5% lower than the gain | | |
| . requeries response | 2. | 5. a.i.a. 18116. satish noquonisis is 5/6 18116. tilan tilo gam at 20 i izi 800 iaa | |
| Amplitude linearity | ±0.5% of reading from best fit straight line approximation | | |
| Residual noise | 0.01 pC rms + 0.01 pC rms per 1000 pF RTI or noise RTO as specified in Table 1 whichever is | | |
| | | ured over a bandwidth of 3 Hz to 20 kHz | |
| Shock and vibration sensitivity | 0.01 pC/g maximum RTI | | |
| Environmental Characteristics | | | |
| Temperature | Operating | -67°F to 212°F (-55°C to 100°C) | |
| • | Storage | -99°F to 257°F (-73°C to 125°C) | |
| Humidity | - | ling screw is soldered. Meets MIL-STD-810D, Method 507.2, Procedure III | |
| Altitude | | ing screw is soldered. | |
| Vibration | 120 mils D.A. | 5 Hz to 55 Hz | |
| | 20 g | 55 Hz to 2000 Hz | |
| Shock 100 g | 6.5 millisecond sawt | | |
| EMC capability | | | |
| Emo capability | | The unit meets the requirements of the following specifications: MIL-STD-826, CLASS Am; MIL-I-6181D; MSFC-SPEC-279, CLASS 1; AF/BSD EXHIBIT 62-87 | |
| Power | 515 520, 6145 | 2,2. 3. 3. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. | |
| Voltage | 20 to 32 VDC (28 VD | OC nominal) | |
| Current | | unfiltered units, 25 mA maximum for filtered units | |
| Polarity protection | | polarity reversal of the 28 V supply | |
| Case isolation | | unds isolated from each other by 50 M Ω or greater at 50 VDC | |
| Cuse isolation | Case and signal grot | and isolated from each other by 50 Miss of greater at 50 VDC | |
| Physical Characteristics | | | |
| Dimensions | 1.00" l x 1.00" w x 0 | 1.75" h (25.4 mm x 25.4 mm x 19.1 mm) exclusive of mounting flange and | |
| | connectors | | |
| Mounting | Unit mounts with tw | | |
| Case material | | roless nickel plate finish | |
| Weight | 1.2 oz (34 gm) maxir | num | |
| Connectors | Input | 10-32 coaxial | |
| | Output | Viking VR5/4AG15. Pin A is the 28 VDC, Pin B unbiased output, Pin C | |
| | biased out | put, Pin D power and signal ground, Pin E case ground | |


Airborne charge amplifiers | Model 2680M1-M7

| Accessorie | es · | |
|------------|--|-----------|
| Options | Description | 2680M1-M7 |
| 21997 | Accessory Kit: | |
| | EP38 - Mating plug (Viking #VP5/4CE6), QTY 1 | Included |
| | EP35 - Hood (Viking #VS4/16C5), QTY 1 | Included |
| | EP31- Potting sleeve (Viking #VS4/16C9), QTY 1 | Included |
| | EHW172 - Lockwasher, #6, QTY 2 | Included |
| | EH293 - Screw, CAP 6-32 X 3/4, QTY 1 | Included |
| | EH535 - Screw, CAP 6-32 X 1/4, QTY 1 | Included |
| | | |

Notes

- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.
- 2. Model number definition:

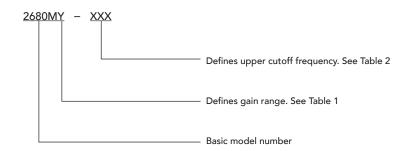

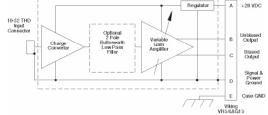

| "M" number | Gain range [mV/pC] | Input pulse [pC] | Residual noise [mV rms] |
|---------------|-----------------------|---------------------|----------------------------|
| M1 | 0.1 to 1.0 | 50 000 | 1.5 |
| M2 | 0.2 to 2.0 | 25 000 | 1.5 |
| M3 | 0.5 to 5.0 | 10 000 | 1.5 |
| M4 | 1.0 to 10.0 | 5000 | 1.5 |
| M5 | 2.0 to 20.0 | 2500 | 1.5 |
| M6 | 5.0 to 50.0 | 1000 | 1.5 |
| M7 | 10.0 to 100 | 500 | 2.0 |

| IUDIC | ٠. | Jani | ranges |
|-------|----|------|--------|
| | | | |
| | | | |
| | | | |
| | | | |

| Dash No. | Lower cutoff freq. [-5%] | Upper cutoff freq. [-5%] |
|----------|-----------------------------|-----------------------------|
| None | 5 Hz | 20 kHz (10 kHz for M7) |
| 101 | 5 Hz | 100 Hz |
| 201 | 5 Hz | 200 Hz |
| 501 | 5 Hz | 500 Hz |
| 102 | 5 Hz | 1 kHz |
| 202 | 5 Hz | 2 kHz |
| 502 | 5 Hz | 5 kHz |
| 103 | 5 Hz | 10 kHz |
| 203 | 5 Hz | 20 kHz (10 kHz for M7) |
| 402 | 5 Hz | 4 kHz |
| 250 | 5 Hz | 25 Hz |

Table 2: Frequency response



10869 NC Highway 903, Halifax, NC 27839 USA

endevco.com | sales@endevco.com | 866 363 3826