



MEMS High-G Shock Accelerometers

State-of-the-Art MEMS Design and Fabrication

Highlights

- Titanium housing and OEM configuration available
- Slight damping reduces resonance amplification
- Mechanical over-range stops improve survivability
- Wide band frequency response
- Low power consumption
- Low warm-up drift

Applications

- Safe and Arm
- Smart Fuzes
- Penetrator Tests
- Weapons Data Recorders
- Explosive Environments (pyroshock)
- Metal-to-metal Impact
- Blast Loading of Structures / Blast Survivability



Series 3991
MEMS High-G
Shock Accelerometer



Series 3991 MEMS high-amplitude shock accelerometers from PCB Piezotronics (PCB®), represent state-of-the-art industry technology for miniature, high amplitude, DC response acceleration sensors. This series is capable of measuring long duration transient motion, as well as, responding to and surviving extremely fast rise times, typical of a high-G shock event. Both a packaged and an OEM configuration are offered, to fulfill a variety of installation requirements.

The air-damped acceleration sensing element, is micromachined from silicon, is manufactured with the latest advances in etching techniques and equipment. This tiny element measures just 2.5 x 1.7 x 0.9 mm (L x W x H), and incorporates a seismic mass, protective over-range stops and a full-active, piezoresistive Wheatstone bridge.

Series 3991 is intended to fulfill the most demanding aerospace and defense application requirements. Their design concepts were born from more than 20 years of PCB® expertise in very high-G shock ($\geq 20,000$ G) measurement applications and sensor development. Our design team has the most experience in the world for these applications. Our process engineers utilized the latest and most sophisticated techniques and equipment to achieve the desired performance levels that previously have not been attainable.

As with all PCB® instrumentation, these sensors are complemented with toll-free applications assistance, 24-hour customer service and are backed by our Total Customer Satisfaction no risk policy.



MTS SYSTEMS CORPORATION



SERIES 3991 MEMS HIGH-G SHOCK ACCELEROMETERS

MEMS High-Amplitude Shock Accelerometers



MEMS High-Amplitude Shock Accelerometers

Model Number	3991B112KG	3991B1120KG	3991B1160KG	3991B1020KG	3991B1060KG
Sensitivity (10VDC excitation)	0.020 mv/g	0.010 mv/g	0.003 mV/g	0.010 mv/g	0.003 mV/g
Sensitivity	0.02 mV/V/g	0.001 mV/V/g	0.0003 mV/V/g	0.001 mV/V/g	0.0003 mV/V/g
Measurement Range	± 0 to 2000 g	± 0 to 20,000 g	± 0 to 60,000 g	± 0 to 20,000 g	± 0 to 60,000 g
Frequency Range (± 1 db)	10 kHz	10 kHz	20 kHz	10 kHz	20 kHz
Resonant Frequency	> 20k Hz	> 60k Hz	>120k Hz	> 60k Hz	>120k Hz
Overload Limit (Shock)	± 10,000 g pk	± 60,000 g pk	± 100,000 g pk	± 60,000 g pk	± 100,000 g pk
Overload Limit (Mechanical Stops)	≥ 2.2 kg	≥ 30 kg	≥ 80 kg	≥ 30 kg	≥ 80 kg
Temperature Range (Operating)	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Excitation Voltage (Typical)	10 VDC	10 VDC	10 VDC	10 VDC	10 VDC
Excitation Voltage	3.3 to 15 VDC	3.3 to 15 VDC	3.3 to 15 VDC	3.3 to 15 VDC	3.3 to 15 VDC
Bridge Resistance (± 2k ohms)	2k ohms	6k ohms	6k ohms	6k ohms	6k ohms
Physical					
Size (Height x Length x Width)	0.11 x 0.56 x 0.28 in (2.79 x 14.22 x 7.11 mm)	0.11 x 0.56 x 0.28 in (2.79 x 14.22 x 7.11 mm)	0.11 x 0.56 x 0.28 in (2.79 x 14.22 x 7.11 mm)	0.11 x 0.56 x 0.28 in (2.79 x 14.22 x 7.11 mm)	0.11 x 0.56 x 0.28 in (2.79 x 14.22 x 7.11 mm)
Weight	0.045 oz 1.28 gm	0.045 oz 1.28 gm	0.045 oz 1.28 gm	0.045 oz 1.28 gm	0.045 oz 1.28 gm
Mounting	(2) Through-holes / Screws	(2) Through-holes / Screws	(2) Through-holes / Screws	(2) Through-holes / Screws	(2) Through-holes / Screws
Housing	Titanium	Titanium	Titanium	Titanium	Titanium
Cable Length	10 ft 3 m	10 ft 3 m	10 ft 3 m	3 ft 0.91 m	3 ft 0.91 m
Electrical Connection	034 FEP, Integral Cable	034 FEP, Integral Cable	034 FEP, Integral Cable	094 Aramid, Integral Cable	094 Aramid, Integral Cable
Cable Termination	Pigtails	Pigtails	Pigtails	Pigtails	Pigtails
Supplied Accessories					
Mounting Screw	(2) Model 081A110 (4-40 x 1/4" SHCS)	(2) Model 081A110 (4-40 x 1/4" SHCS)	(2) Model 081A110 (4-40 x 1/4" SHCS)	(2) Model 081A110 (4-40 x 1/4" SHCS)	(2) Model 081A110 (4-40 x 1/4" SHCS)
Calibration Certificate	ACS-62 Shock Calibration	ACS-62 Shock Calibration	ACS-62 Shock Calibration	ACS-62 Shock Calibration	ACS-62 Shock Calibration





Model Numbering System for Series 3991 High-Amplitude Shock Accelerometers

1) Single Axis Series 3991

3991B	Single axis, MEMS DC response shock accelerometer (revision A)				
	2) Configurations				
	11	Titanium housing, 10 ft (3m) integral cable, 4 conductor FEP cable, terminating in pigtails, two through-bolt mounting holes			
	3) Measurement Range				
		2KG	±2,000 G		
		20KG	±20,000 G		
		60KG	±60,000 G		
	4) Integral Cable Length (add only if selecting integral cable and other than standard length shown above)				
			/ XXX	Specify XXX as desired in feet	
	5) Cable Termination (add only if selecting integral cable with other than pigtail connection)				
			LN	Mini 8-pin DIN connector	
			AY	4-pin plug	

Examples					
3991B	11	60KG	/020	LN	Single axis, titanium housing, integral 4 conductor FEP cable, 60,000 G range with 20 ft (6.1m) cable terminating with Mini 8-Pin DIN connector

Model 080A213




Triaxial mounting block for Model 3991B11XXKG (Screw 080A110)

LN Mini 8-Pin DIN Connector



Bridge input mating connector

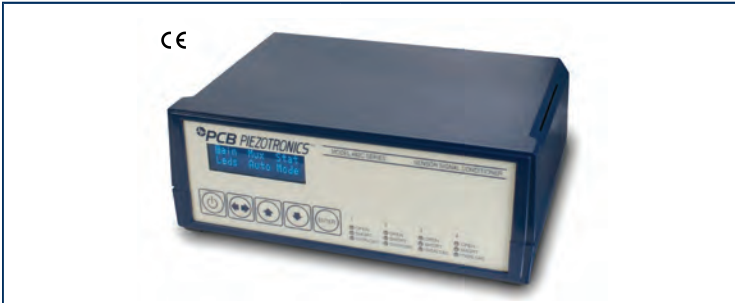

MEMS Sensor Signal Conditioner

Model Number	482C27
Channels	4
Sensor Input Types	Differential/Single-ended MEMS/Bridge, ICP®/Voltage
Compatible Sensor Series	350X, 360X, 371X, 374X, 3991, load cells
Gain	x0.1 to x2000; x0.1 to x200 [1]
Gain Increment	0.1
Output Range	±10 V
Frequency Response	DC to 100k Hz (-3dB)
Temperature Range (Operating)	+32 to +122 °F 0 to +50 °C
Excitation Voltage	0 to 12 VDC unipolar or bipolar [2]
Computer Controller	Ethernet/RS-232
Power Required	9 to 18 VDC [3]
Input Connectors	(4) 8-socket mini DIN, (4) BNC Jacks
Output Connectors	BNC Jacks
Size (Height x Width x Depth)	3.2 in x 8.0 in x 5.9 in 8.1 cm x 20 cm x 15 cm
Weight	2.25 lb 1.021 kg
Supplied Accessories	
(1) 017AXX Power Cord; (1) 488A14 Universal Power Adaptor; (1) MCSC Control Software	
Additional Accessories	
Auto Lighter Adaptor	488A13
Input Mating Connector(s)	8-pin mini DIN, AC
Additional Versions	
8-channel 19" rack mount version, computer control only	483C28
Notes	
[1] Maximum gain for bridge/MEMS input is x2000 and for ICP®/voltage input is x200. [2] In bipolar mode, +Vexc and -Vexc track each other. They are equal and opposite. [3] Supplied with 85 to 264 VAC, 47 to 400 Hz Universal Power Adaptor.	



Typical Rear Panel

The Model 482C27 four-channel, benchtop signal conditioner is full-featured and cost effective. It offers low noise operation and simplicity of use. Each channel is selectable between two input types: Bridge/MEMS or ICP®/Voltage.

For the bridge inputs, this model offers 0 to 12 VDC unipolar or bipolar excitation voltage for use with single-ended or differential MEMS and bridge sensors, like load cells and reaction torque sensors. This model features incremental gain of x0.1 to x2000, auto zero, auto balance, AC/DC coupling, normalization, and shunt calibration. The bridge inputs are compatible with full bridge sensors as well as ½ and ¼ bridge sensors, with internal switchable bridge completion resistors.

For the ICP® inputs, the model offers 0 to 20 mA of constant current excitation, to power ICP® sensors or in-line ICP® charge converters. This model features incremental gain of x.1 to x200, normalization and AC/DC coupling.

The base unit of this model is powered from 9 to 18 VDC, however, it is supplied with a universal voltage, AC power adaptor. Optional auto lighter adaptor, Model 488A13, is also available.

As with all PCB® instrumentation, this model is complemented with toll-free application assistance, 24-hour customer service and is backed by a no-risk policy that guarantees satisfaction or your money refunded.



483C28
8-channel version, computer control only



3425 Walden Avenue, Depew, NY 14043-2495 USA
Toll-Free in USA 866-816-8892
24-hour SensorLineSM 716-684-0001
Fax 716-684-0987 E-mail aerosales@pcb.com
www.pcb.com

AS9100 CERTIFIED ■ ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2018 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. SensorLineSM is a servicemark of PCB Piezotronics, Inc. PCB Piezotronics, Inc. was acquired by MTS Systems Corporation in 2016 and merged with its sensors division – MTS Sensors.

The **Aerospace & Defense** division of PCB Piezotronics, serves the Turbine Engine, Helicopter Health and Usage Monitoring (HUMS), Ground Vibration Test, Flight Test, Wind Tunnel Test, Fuze/Safe and Arm, Spacecraft and Aerospace Systems design and development communities with sensors and associated signal conditioning for measurement of acceleration (vibration, shock and rigid body); acoustics; pressure; force; strain and torque. Sensor technologies employed include piezoelectric, piezoresistive (both strain gage and MEMS) and variable capacitive (both MEMS and microphone). Manufacturing operations are certified to AS9100 and ISO 9001, with calibration procedures accredited by A2LA to ISO 17025. Products can be manufactured to meet specific aerospace environmental standards, with program design requirements to meet RTCA-DO-160 and MIL-STD-810 and low outgassing designs available for specific applications.

Visit www.pcb.com to locate your nearest sales office