



SERIES 962

PORTABLE DATA RECORDER

- Streamlined menu system with a tactile feel keypad, USB ports, and analog output capability
- Measure and record torque, angle, and clamp load characteristics of threaded fastener components
- Two input channels for torque transducers, torque-angle transducers, or fastener tension load cells
- Record graphic data to plot: torque vs. angle, torque vs. tension, torque vs. time, and more
- Print both numeric and graphic data
- Upload numeric and graphic data to a PC via FastPlot2 software

TYPICAL APPLICATIONS

- Verify Fastener Torque-Tension
- Analyze Torque Angle Signatures
- Audit, Calibrate, or Certify Performance of Power Tools and Hand Torque Wrenches
- Dynamic Monitoring of Power Tool Testing
- Troubleshoot Problematic Joints

TORQUE-ANGLE TENSION TESTING

PCB Load & Torque Division's RS Technologies, Model 962 Portable Data Recorder is a battery-operated, transient recorder with two transducer inputs that can be used with torque-only, torque-angle, or force transducers. It can serve as a portable threaded fastener laboratory for measuring fastener torque, angle of turn, and clamp load. Ideal for performing fastener analysis, for auditing and certifying power tools, and for testing hand torque wrenches; Model 962 is a cost effective, versatile, and easy-to-use recorder that can collect numeric peak data, XY graphic plots, and store the data to a thumb drive. The data can be easily displayed or printed on a PC running FastPlot2 software. The alphanumeric setup and calibration menus assure ease of operation. The unit can be used with all RS Technologies' rotary torque-angle and clamp force transducers and other conventional and industry-standard strain gage transducers.

Model 962 can print out a numeric data report that contains basic information about the test along with time & date-stamped data for peak torque, angle of turn, clamp load, and torque at tension data. Statistics including high, low, median, ± 3 Sigma, etc. are calculated and included on this report. The numeric test data and the graphic data can be uploaded to a computer via the USB port using the FastPlot2 data transfer and plotting utility. FastPlot2 can also provide additional graphic analysis.

STATISTICS

After three rundowns, Model 962 Portable Data Recorder updates statistics including standard deviation and Cpk. It also flags data as being high or low depending upon the programmed engineering limits.


DATA AND COMMUNICATIONS

Graphic plots, numeric data reports, and statistics are printed via the parallel port. Recorded data can be downloaded to a PC via the serial port for further analysis using the FastPlot2 software. Program updates are easily uploaded through the USB port.

REAL-TIME PLOTTING CAPABILITIES

Model 962 captures real-time and peak readings for torque-angle, torque-clamp load, or torque-time and immediately displays or plots one of the following, based upon the instrument setup:

- Torque vs. Time
- Torque vs. Angle
- Torque & Angle vs. Time
- Torque & Clamp Force vs. Time
- Torque and Clamp Force vs. Angle
- Clamp Force vs. Torque
- Tool RPM vs. Time
- Tool RPM vs. Angle

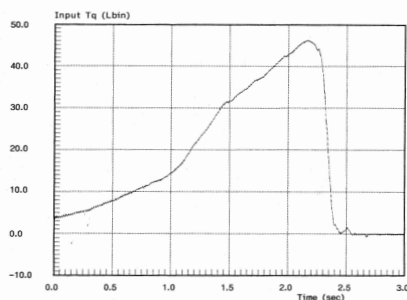

Torque vs. Time Assembly Plot

SPECIFICATIONS

Performance

Torque and Force Input Channels

Input Range	±2.5 mV/V, ±4.5 mV/V, ±5 VDC
Excitation	5 VDC, 120 mA Maximum
Resolution	21 -bit
Non-linearity	0.25% Maximum (F.S.)
Frequency Response	10 kHz
Positive Voltage Peak Trap Circuit	7 ms Reset Time
Peak Threshold	Software Programmable
Peak Reset	Manual or Software Programmable (Automatic Reset)

Angle Input Channel

Type	Quadrature A/B Track
Excitation	5 VDC
Input Frequency	1000 kHz Maximum

Physical

Temperature Range	+32 to +158 °F (0 to +70 °C)
-------------------	------------------------------

Display

Viewing Area	4.85 x 2.68 in (123 x 68 mm)
Resolution	240 x 128 Pixels, Backlit LCD

Battery

Indication	Battery Low Indication
Battery Life	8 Hours Maximum, Continuous Use
Charge Time	3.5 Hours, Maximum

Dimensions

Size (W x D x H)	10.12 x 8.50 x 3.25 in	257.0 x 215.9 x 85.1 mm
Weight	6.0 lb	2700 gm

Mating Connectors

Channel 1 and Channel 2	DB, 15 Pins
TTL/IO	DB, 25 Pins
USB Port A	A Type
USB Port B	B Type

Supplied Accessories

FastPlot2 Upload/Graphing Utility for PC Running Windows® 7/10, Battery Charger, USB Cable, 8GB USB Memory Drive, Instruction Manual, Carrying Case, & A2LA Accredited Calibration Certificate



24350 Indoplex Circle, Farmington Hills, MI 48335 USA

Toll-Free in the USA: 866 684 7107

Phone: 1 716 684 0001 | Email: ltinfo@pcb.com

PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.

© 2019 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLineSM is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States. All other trademarks are property of their respective owners.

DS-0225-revNR-1119



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.