



Automated Latch Effort Inspection

Automated Latch Effort Inspection for an Automotive Glove Box

Eastern Automation Systems designs and builds custom assembly and inspection machines. The machines range from simple manual tools, to fully automated assembly lines. Eastern places a large emphasis on quality by integrating inspection tasks directly into the assembly process. All machine motion is controlled with endpoint sensors, and all components assembled are 100% inspected in process for presence, color, orientation, and function. A large part of the machine control software is dedicated to validating all inputs of each cycle of the assembly process. This ensures robust machine operation for many cycles within an industrial environment.

A recent automated assembly line for a plastic over-molded, spring steel, automotive glove box latch (see figure 1) was designed with a latch effort inspection station that required measurement very small forces in-process. However, the machine and operators can cause very high overloads as part of normal machine use. Thus the customer required a force sensor that was durable enough for the environment, yet sensitive enough for the required measurement.



Figure 1
Typical Glove Box Latch

Inspection Station Description

The inspection station is one of twelve placed around a carousel style, asynchronous assembly machine. The assembly must pass several inspection criteria including an automatic “pull” test to measure the human effort required to pull up on the latch, just as one would encounter when they open up the glove box in an automobile. In order to perform this inspection, a strain gage load cell with an analog output is typically used. Pneumatic actuators present the load cell tooling fingers to the latch (see figure 2) The latch is then cycled a few times to “break-in” the components. On the last pull cycle, the

analog reading of the load cell input is sampled, compared to controls limits and stored in the system's controller.

The customer stated the following inspection criteria.

Inspection rate: 1 inspection every 3.5 seconds

Inspection load range: 8 to 25 N, with ± 1 resolution (latch handle style dependent)

Control parameters: lower limit, upper limit, scale (calibration) factor, quantity bad in a row to stop machine.

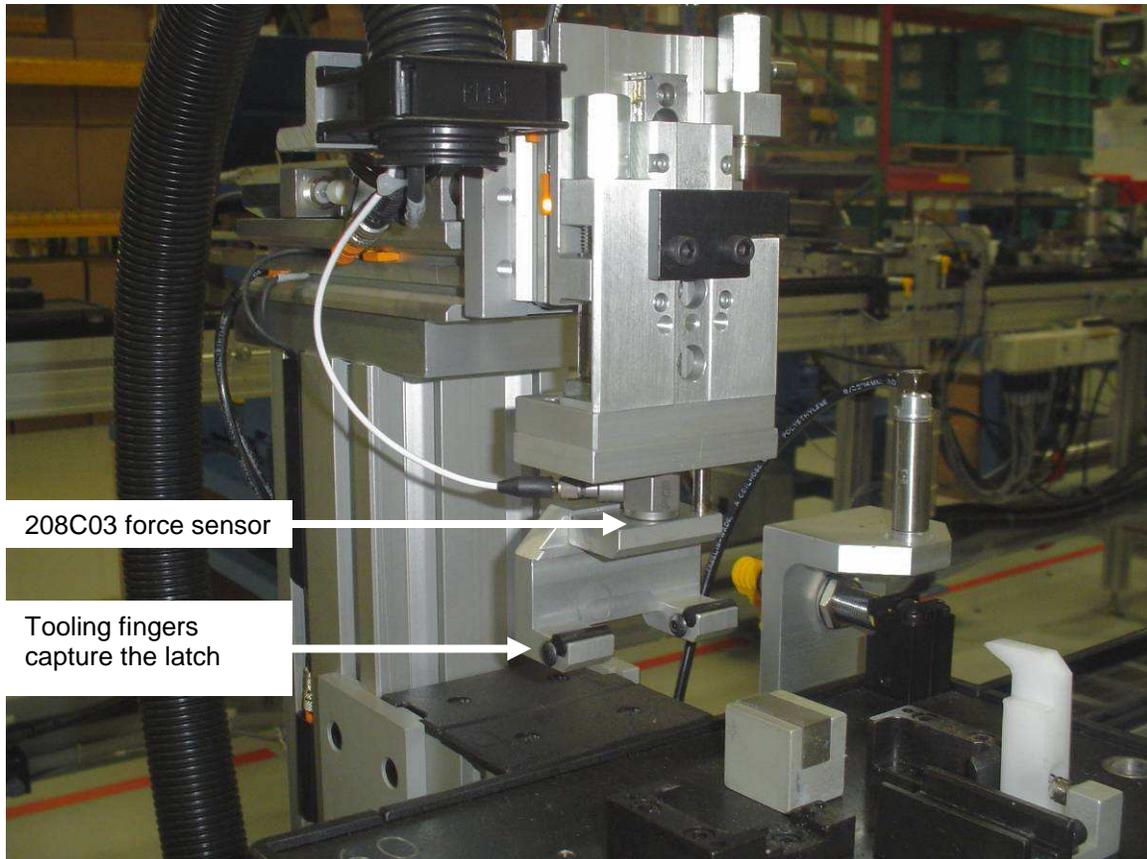


Figure 2
Latch Effort Inspection Station

How to Measure?

An ideal sensor choice was a 45 N (10 lb), 2 mV/V strain gage load cell. However, in normal machine use, an intermittent condition occurred that generated high impact loads perpendicular to the measuring axis of load cell. This impact force exceeded the 150% safe overload range of the load cell and resulted in failure.

The most common failure mode of a strain gage load cell is indeed the application of force beyond the yield point of the strain gage flexure (safe overload range). A typical 2.225 kN (500 lb) strain gage load cell has an overload limit of 3.3 kN (750 lb), equivalent to 150%. Overloading the load cell usually causes permanent damage to the flexure, which results in a zero shift, non-linearity or complete failure.

Quartz (Silicon Di-Oxide, SiO₂) piezoelectric force sensors are typically an order of magnitude stiffer than strain gage load cells of an equivalent full-scale capacity. A quartz piezoelectric force sensor reacts to stress, resulting in a miniscule strain, to produce its charge output. They have stiffness on the order of 1.05 to 23 kN/μm (6 to 130 lbs/μin). This means there is virtually no deflection during measurement. Most have a compressive strength of 3.0×10^8 Pa (4.351×10^4 psi), which allows massive overloading without risk of crushing the sensor.

Even when the sensor is overloaded beyond its stated capacity, they suffer no ill effects, zero-shift, fatigue or linearity change. For example, PCB's model 208C03, with a capacity of 2.2 kN (500) lb and a diameter of 16 mm (0.625 in), the maximum compression of 22 kN (5,000 lb) is equivalent to 1,000% over-range protection. Additionally, the sensors are designed for harsh industrial environments with hermetically sealed, stainless steel housings.

For the customer's latch effort application, a 2.2 kN (500 lb) quartz piezoelectric force sensor was therefore used in order to not damage the force sensor. The reader may ask, "Why not simply select a 2.2 kN (500 lb) strain gage load cell? The end result is the same, a sensor that is capable of measuring well past the required capacity for the application, correct?"

The answer is that it is not the best solution for the application because of the low output sensitivity of a strain gage load cell. A strain gage load cell typically has a 2 mV/V sensitivity, and with a 10 Volt DC power supply, the full scale strain gage output would only be 20 mV. While the quartz piezoelectric technology allowed use of a sensor with a much higher capacity, hence a much higher tolerance for breakage, it also featured ICP® sensor output. This type of output is a 5 volt signal directly from the sensor. The high voltage output of the ICP® force sensor provides a significant benefit in terms of signal to noise ratio, especially since the application required a low force capacity (25 N) compared to the rated capacity (2.2 kN).

Using the ICP® sensor circuit, which is built inside the sensor, there is excellent measurement resolution. The 2.2 kN (500 lb) force sensor that was required to survive the impacts, had a broadband resolution of 0.022 N (0.005 lb).

Calibration on the Machine

Another issue common to in-process monitoring applications is the complexity of a calibration routine. A calibration on the machine was simply not possible due to mechanical constraints of the tooling.

The quartz ICP® quartz force sensor does not require the use of a dead-weight style calibration and a lengthy setup routine. Instead a "master" latch was used. This "master" latch was calibrated with a separate tension-measuring device. The "master" latch was then used to check the machine measurement and scale the ICP® force sensor input in the machine controller.

What About the Piezoelectric Drift?

A common sensor characteristic that makes most machine builders shy away from piezoelectric sensors is zero drift. Drift is a long term zero-shift phenomenon encountered with traditional charge output piezoelectric force sensors. These older style

piezoelectric force sensors require remote charge amplifiers, which are the source of the drift.

The ICP® voltage output force sensor actually eliminates issues associated with this drift through AC coupling. Low frequency response for ICP® force sensors acts like a high-pass filter and may be tailored to a specific value to accommodate most high speed in-process inspection machines. This AC coupled signal not only eliminates the drift issue, but it allows for control simplification. Charge amplifiers require reset and control signals from the machine controller. Thus, since extra relays, wiring and programming are not required, the machine control becomes less confusing.

Customer's Results

During machine run off at the customer's site, several sets of data were taken with the master latch and then both good and bad parts to verify the measuring system performance. Additionally, a comparison between the 45 N and 2.2 kN ICP® sensors was performed to verify that the higher capacity sensor would indeed prove useful. Using the master latch in the inspection station, the standard deviation for the 2.2 kN sensor was $\pm .03$ N, which was well within the machine's required resolution of ± 1 Newton (see table 1).

Sample Nr.	Force (N)	
	45 N Sensor	2,200 N Sensor
1	12.01	12.08
2	12.02	12.06
3	12.01	12.04
4	12.03	12.04
5	12.02	12.09
6	12.02	12.11
7	12.03	12.14
8	12.04	12.05
9	12.05	12.04
10	12.03	12.06
Average	12.026	12.071
Std Dev	0.013	0.034

Table 1
Master Latch Repeatability Measurements

The customer was thus able to use a sensor that survived the harsh industrial environment and provided the required resolution to ensure 100% in-process latch inspection.

This article was originally printed in Quality Magazine.



3425 Walden Avenue, Depew, NY 14043 USA

pcb.com | info@pcb.com | 800 828 8840 | +1 716 684 0001

© 2021 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevo is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevo), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at www.pcb.com/trademarkownership.