



In-line Piezoresistive Sensor Signal Converter

Powered by ICP® Sensor Signal Conditioners

Highlights

- Compatible with Bridge and MEMS Sensors
- Provides Regulated 5 VDC Excitation
- Operates from Any ICP® Sensor Signal Conditioner
- Fixed Gain
- DC Coupled Output




The 427A Series of in-line signal converters represent a revolutionary advancement in sensor signal conditioning. A patent is pending on the circuit, which bridges the simplicity of the two-wire interface used by ICP® sensor signal conditioners with the versatility of the DC coupled output from piezoresistive sensors.

The 427A Series takes the conventional current supply of any ICP® sensor signal conditioner and provides a highly regulated 5V excitation to any Wheatstone bridge transducer. It then amplifies the differential output of the bridge with wide-band frequency response and adds that DC coupled output to the ICP output bias voltage. For the first time with ICP circuitry, it is possible to make truly static measurements.

Each model in this series has a different gain and is also available in a version with TEDS capability. Optional, filtering can also be added to any of the models in this series.

As with all PCB® instrumentation, this model is complemented with toll-free application assistance, 24-hour customer service, and is backed by a no-risk policy that guarantees satisfaction or your money refunded.

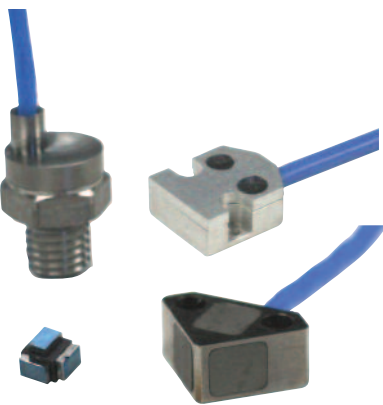

Samples of Compatible MEMS Sensors



CE



In-line ICP-Powered Bridge Signal Converters [1]

Model Number	427A01	427A02	427A03	427A04	427A05
Gain	200 V/V	100 V/V	50 V/V	20 V/V	10 V/V
Input Range	+/-25 mV	+/-50 mV	+/-100 mV	+/-250 mV	+/-500 mV
Output Voltage Range	+/-5.0 V	+/-5.0 V	+/-5.0 V	+/-5.0 V	+/-5.0 V
Frequency Response (+/-5%)	DC to 100k Hz	DC to 100k Hz	DC to 100k Hz	DC to 100k Hz	DC to 100k Hz
Temperature Range (Operating)	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C	-65 to +250 °F -54 to +121 °C
Excitation to Sensor	+5 VDC	+5 VDC	+5 VDC	+5 VDC	+5 VDC
Input Impedance (minimum)	2500 Ohms	2500 Ohms	2500 Ohms	2500 Ohms	2500 Ohms
Constant Current Excitation	2 to 20 mA	2 to 20 mA	2 to 20 mA	2 to 20 mA	2 to 20 mA
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	18 to 28 VDC	18 to 28 VDC	18 to 28 VDC
Input Connector	4-pin jack	4-pin jack	4-pin jack	4-pin jack	4-pin jack
Output Connector	BNC jack	BNC jack	BNC jack	BNC jack	BNC jack
Size (Length x Diameter)	3.5 in x 0.52 in 88.9 mm x 13.2 mm	3.5 in x 0.52 in 88.9 mm x 13.2 mm	3.5 in x 0.52 in 88.9 mm x 13.2 mm	3.5 in x 0.52 in 88.9 mm x 13.2 mm	3.5 in x 0.52 in 88.9 mm x 13.2 mm
Weight	1.0 oz 28.3 gm	1.0 oz 28.3 gm	1.0 oz 28.3 gm	1.0 oz 28.3 gm	1.0 oz 28.3 gm
Additional Accessories					
Input Mating Connector(s)	AY	AY	AY	AY	AY
Additional Versions [2]					
TEDS addressable	T427A01	T427A02	T427A03	T427A04	T427A05
Notes					

[1] Patent Pending.
 [2] Filtered or AC-coupled versions are also available, contact factory.



3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in USA 800-828-8840

24-hour SensorLineSM 716-684-0001

Fax 716-684-0987 E-mail info@pcb.com

Web Site www.pcb.com

AS9100 CERTIFIED ■ ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2009 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, ICP, Modally Tuned, Spindler, Swiveler and TORKDISC are registered trademarks of PCB Group. SoundTrack LXT, Spark and Blaze are registered trademarks of PCB Piezotronics. SensorLine is a service mark of PCB Group. All other trademarks are properties of their respective owners.

TM-ELE-427A-0609

Printed in U.S.A.

PCB® Piezotronics Test & Measurement Electronics product offering includes signal conditioners and cabling for ICP® and charge output piezoelectric, MEMS-based, and full-bridge strain gage sensors. Battery-powered and line-powered signal conditioners are available, with a wide range of options, including gain, filtering, TEDS and integration functions. Stock cables for quick delivery and custom cables to meet any connection requirement are also available. Additional Test & Measurement products include sensors for acoustics, force, load, strain, torque, pressure, acceleration, shock, and vibration. PCB® products are backed by our **Total Customer Satisfaction** policy, which guarantees your satisfaction or your money refunded.

Visit www.pcb.com to locate your nearest sales office