


101-1020-90


PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither it nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

APPLICATION		
NEXT ASS'Y	USED ON	VAR

REVISIONS				
REV	DESCRIPTION	ECN	DATE	APP'D
P	REVISED PER ECR	18315	9/9/03	<i>ma/az</i>

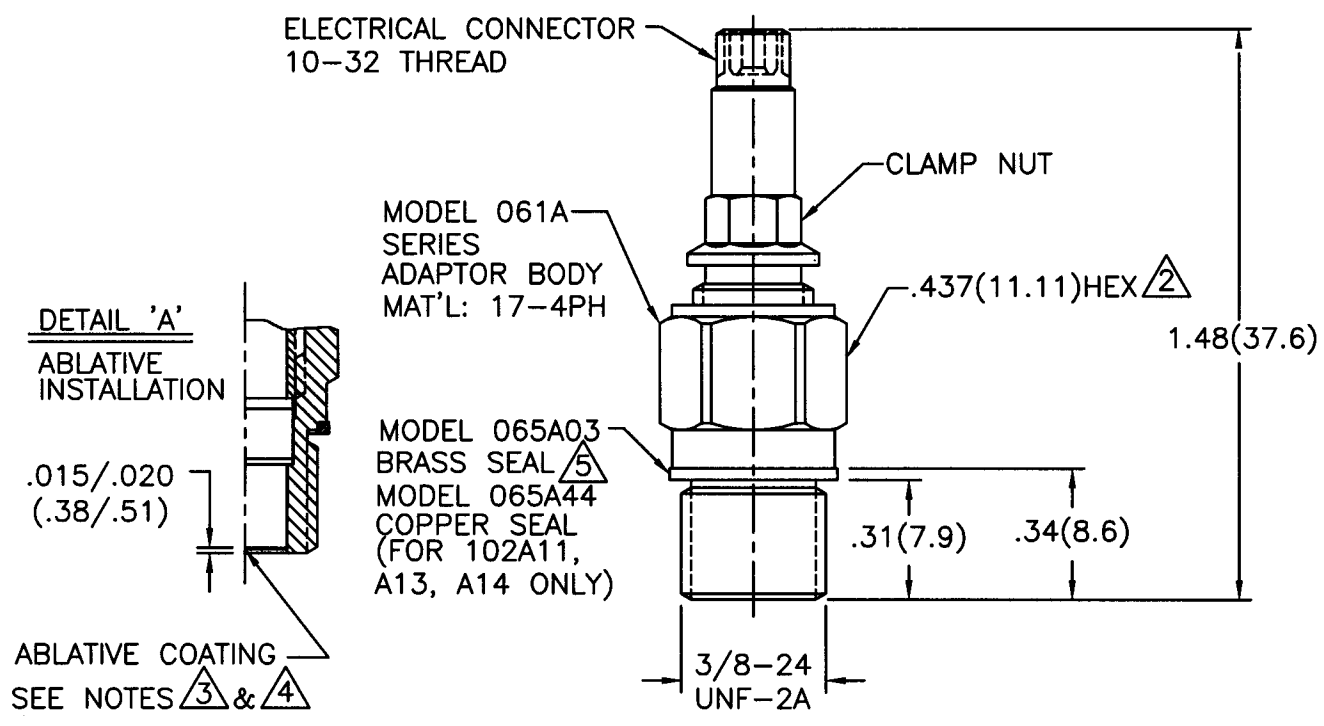

MOUNTING HOLE PREPARATION:
 $\phi .332(\phi 8.43)$
 THRU
 $\square \phi .437(\phi 11.10)$
 X $.030(.76)$ ∇
 TAP 3/8-24 UNF-2B
 THRU

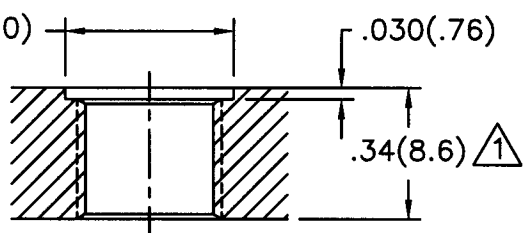

MOUNTING HOLE DETAIL

- ⑤ MODEL 065M29 ST STL SEAL AVAILABLE.
- ④ BLACK VINYL ELECTRICIANS TAPE HAS BEEN FOUND TO BE AN EFFECTIVE ABLATIVE MATERIAL AS IS DC-4 SILICONE GREASE.
- ③ IF CHECKED, RTV ABLATIVE COATING HAS BEEN APPLIED TO THE DIAPHRAGM FOR FLASH TEMPERATURE PROTECTION. REPLACE WITH: GE SILICONE RTV 106
- ② MOUNTING TORQUE ON 7/16 HEX - 5 TO 8 FT LBS(6.78-10.85 NM)
- ① ABOVE INSTALLATION SHOWN FOR WALL THICKNESS OF .34(8.6) THICK. \square THICKER WALLS $\phi .75(\phi 19.0)$ TO CLEAR .497(11.11) HEX AND ALLOW FOR SOCKET WRENCH.

UNLESS SPECIFIED TOLERANCES		DRAWN	<i>ECB</i>	<i>9/9/03</i>	MFG	<i>CB</i>	<i>9/9/03</i>	PCB PIEZOTRONICS™ 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 EMAIL: SALES@PCB.COM
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	CHK'D	<i>DM</i>	<i>9/10/03</i>	ENGR	<i>BSH</i>	<i>9/9/03</i>	
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ±0.3 XX ±0.13	APP'D	<i>BSH</i>	<i>9/11/03</i>	SALES	<i>MSD</i>	<i>9/11/03</i>	CODE IDENT. NO. 52681
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES	TITLE						DWG. NO.
FILLETS AND RADII .003 - .005	FILLETS AND RADII [0.07 - 0.13]	INSTALLATION DRAWING						101-1020-90
DD011 REV. C 01/21/03		MODELS 101A02, A03, A04, A06 102A, A03, A04, A06, A11, A13, A14						SCALE: 2X SHEET 1 OF 1