



**Model 377B13**  
**Precision Condenser Microphone**  
**Installation and Operating Manual**

**For assistance with the operation of this product,  
contact PCB Piezotronics, Inc.**

**Toll-free: 800-828-8840**  
**24-hour SensorLine: 716-684-0001**  
**Fax: 716-684-0987**  
**E-mail: [info@pcb.com](mailto:info@pcb.com)**  
**Web: [www.pcb.com](http://www.pcb.com)**





|  |
|--|
| <b>Service, Repair, and Return<br/>Policies and Instructions</b> |
|--|

**The information contained in this document supersedes all similar information that may be found elsewhere in this manual.**

**Service** – Due to the sophisticated nature of the sensors and associated instrumentation provided by PCB Piezotronics, user servicing or repair is not recommended and, if attempted, may void the factory warranty. Routine maintenance, such as the cleaning of electrical connectors, housings, and mounting surfaces with solutions and techniques that will not harm the physical material of construction, is acceptable. Caution should be observed to ensure that liquids are not permitted to migrate into devices that are not hermetically sealed. Such devices should only be wiped with a dampened cloth and never submerged or have liquids poured upon them.

**Repair** – In the event that equipment becomes damaged or ceases to operate, arrangements should be made to return the equipment to PCB Piezotronics for repair. User servicing or repair is not recommended and, if attempted, may void the factory warranty.

**Calibration** – Routine calibration of sensors and associated instrumentation is recommended as this helps build confidence in measurement accuracy and acquired data. Equipment calibration cycles are typically established by the users own quality regimen. When in doubt about a calibration cycle, a good “rule of thumb” is to recalibrate on an annual basis. It is

also good practice to recalibrate after exposure to any severe temperature extreme, shock, load, or other environmental influence, or prior to any critical test.

PCB Piezotronics maintains an ISO-9001 certified metrology laboratory and offers calibration services, which are accredited by A2LA to ISO/IEC 17025, with full traceability to SI through N.I.S.T. In addition to the normally supplied calibration, special testing is also available, such as: sensitivity at elevated or cryogenic temperatures, phase response, extended high or low frequency response, extended range, leak testing, hydrostatic pressure testing, and others. For information on standard recalibration services or special testing, contact your local PCB Piezotronics distributor, sales representative, or factory customer service representative.

**Returning Equipment** – *Following these procedures will ensure that your returned materials are handled in the most expedient manner.* Before returning any equipment to PCB Piezotronics, contact your local distributor, sales representative, or factory customer service representative to obtain a Return **Warranty, Service, Repair, and Return Policies and Instructions** Materials Authorization (RMA) Number. This RMA number should be clearly marked on the outside of all package(s) and on the packing

list(s) accompanying the shipment. A detailed account of the nature of the problem(s) being experienced with the equipment should also be included inside the package(s) containing any returned materials.

A Purchase Order, included with the returned materials, will expedite the turn-around of serviced equipment. It is recommended to include authorization on the Purchase Order for PCB to proceed with any repairs, as long as they do not exceed 50% of the replacement cost of the returned item(s). PCB will provide a price quotation or replacement recommendation for any item whose repair costs would exceed 50% of replacement cost, or any item that is not economically feasible to repair. For routine calibration services, the Purchase Order should include authorization to proceed and return at current pricing, which can be obtained from a factory customer service representative.

**Contact Information** – International customers should direct all inquiries to their local distributor or sales office. A

complete list of distributors and offices can be found at [www.pcb.com](http://www.pcb.com). Customers within the United States may contact their local sales representative or a factory customer service representative. A complete list of sales representatives can be found at [www.pcb.com](http://www.pcb.com). Toll-free telephone numbers for a factory customer service representative, in the division responsible for this product, can be found on the title page at the front of this manual. Our ship to address and general contact numbers are:

PCB Piezotronics, Inc.  
3425 Walden Ave.  
Depew, NY14043 USA  
Toll-free: (800) 828-8840  
24-hour SensorLine<sup>SM</sup>: (716) 684-0001  
Website: [www.pcb.com](http://www.pcb.com)  
E-mail: [info@pcb.com](mailto:info@pcb.com)



PCB工业监视和测量设备 - 中国RoHS2公布表  
 PCB Industrial Monitoring and Measuring Equipment - China RoHS 2 Disclosure Table

| 部件名称   | 有害物质   |        |        |              |            |              |
|--|--------|--------|--------|--------------|------------|--------------|
|  | 铅 (Pb) | 汞 (Hg) | 镉 (Cd) | 六价铬 (Cr(VI)) | 多溴联苯 (PBB) | 多溴二苯醚 (PBDE) |
| 住房   | ○      | ○      | ○      | ○            | ○          | ○            |
| PCB板   | X      | ○      | ○      | ○            | ○          | ○            |
| 电气连接器  | ○      | ○      | ○      | ○            | ○          | ○            |
| 压电晶体   | X      | ○      | ○      | ○            | ○          | ○            |
| 环氧   | ○      | ○      | ○      | ○            | ○          | ○            |
| 铁氟龙  | ○      | ○      | ○      | ○            | ○          | ○            |
| 电子   | ○      | ○      | ○      | ○            | ○          | ○            |
| 厚膜基板   | ○      | ○      | X      | ○            | ○          | ○            |
| 电线   | ○      | ○      | ○      | ○            | ○          | ○            |
| 电缆   | X      | ○      | ○      | ○            | ○          | ○            |
| 塑料   | ○      | ○      | ○      | ○            | ○          | ○            |
| 焊接   | X      | ○      | ○      | ○            | ○          | ○            |
| 铜合金/黄铜   | X      | ○      | ○      | ○            | ○          | ○            |
| 本表格依据 SJ/T 11364 的规定编制。                          |        |        |        |              |            |              |
| ○：表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。  |        |        |        |              |            |              |
| X：表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。 |        |        |        |              |            |              |
| 铅是欧洲RoHS指令2011/65/ EU附件三和附件四目前由于允许的豁免。           |        |        |        |              |            |              |

CHINA RoHS COMPLIANCE

| Component Name         | Hazardous Substances |              |              |                                |                                |                                       |
|------------------------|----------------------|--------------|--------------|--------------------------------|--------------------------------|---------------------------------------|
|                        | Lead (Pb)            | Mercury (Hg) | Cadmium (Cd) | Chromium VI Compounds (Cr(VI)) | Polybrominated Biphenyls (PBB) | Polybrominated Diphenyl Ethers (PBDE) |
| Housing                | O                    | O            | O            | O                              | O                              | O                                     |
| PCB Board              | X                    | O            | O            | O                              | O                              | O                                     |
| Electrical Connectors  | O                    | O            | O            | O                              | O                              | O                                     |
| Piezoelectric Crystals | X                    | O            | O            | O                              | O                              | O                                     |
| Epoxy                  | O                    | O            | O            | O                              | O                              | O                                     |
| Teflon                 | O                    | O            | O            | O                              | O                              | O                                     |
| Electronics            | O                    | O            | O            | O                              | O                              | O                                     |
| Thick Film Substrate   | O                    | O            | X            | O                              | O                              | O                                     |
| Wires                  | O                    | O            | O            | O                              | O                              | O                                     |
| Cables                 | X                    | O            | O            | O                              | O                              | O                                     |
| Plastic                | O                    | O            | O            | O                              | O                              | O                                     |
| Solder                 | X                    | O            | O            | O                              | O                              | O                                     |
| Copper Alloy/Brass     | X                    | O            | O            | O                              | O                              | O                                     |

This table is prepared in accordance with the provisions of SJ/T 11364.

O: Indicates that said hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement of GB/T 26572.

X: Indicates that said hazardous substance contained in at least one of the homogeneous materials for this part is above the limit requirement of GB/T 26572.

Lead is present due to allowed exemption in Annex III or Annex IV of the European RoHS Directive 2011/65/EU.

DOCUMENT NUMBER: 21354

DOCUMENT REVISION: **D**

ECN: 46162

**PRODUCT GUIDE  
377 SERIES MICROPHONES  
426 SERIES PREAMPLIFIERS**



**Contents:**

|     |  |   |
|-----|--|---|
| 1.0 | Introduction .....                               | 1 |
| 2.0 | Standards .....                                  | 1 |
| 3.0 | Setting up a Microphone Measurement System ..... | 1 |
| 4.0 | Taking Measurements .....                        | 2 |
| 5.0 | Accessories.....                                 | 3 |
| 6.0 | Maintenance .....                                | 4 |
| 7.0 | Calibration.....                                 | 4 |
| 8.0 | Warranty and Service.....                        | 5 |

**1.0 Introduction**

Thank you for your purchase of a PCB high quality microphone. These microphones offer highly accurate and reliable acoustic measurements and are typically used in research and design applications. They are accurate enough for laboratory usage, yet rugged enough for field-testing.

Sound within the typical 20 to 20,000 Hz audible range of a healthy human ear can either be pleasing to the ear, as in music, or unpleasant (or harmful), as in noise. As a result, many applications, from the development of consumer products to research in acoustics, measure sound, even sound outside the range of human hearing. The instrument typically used to measure sound is the microphone, which is designed, like the human ear, to transform pressure oscillations into a corresponding voltage oscillation.

**2.0 Standards**

Before selecting an acoustical instrument, it is important to identify which acoustical standards are appropriate for the application in which the instrument will be used. Whether for legal purposes or for quality assurance programs, these standards will help determine the required quality, accuracy and consistency of the instrument. Standards that correspond to the performance requirements, dimensions and characteristics of acoustical components are established for microphones, sound level meters, calibrators, or other related components. The most common organizations producing these standards are the American National Standards Institute (ANSI) and the International Electrotechnical Commission (IEC). IEC 1094-4 establishes specifications for the mechanical dimensions and certain electroacoustic characteristics for standard industrial microphones. The performance specification sheet supplied with each PCB microphone identifies the standards to which the microphone is compliant.

**3.0 Setting up a Microphone Measurement System**

After the proper microphone has been selected, the corresponding preamplifier, cabling, power supplies, signal conditioning and data acquisition selections are ready to be installed. Not all of these components are required for all test set-ups. The figures below show typical set-ups for externally polarized and prepolarized microphone systems.

A prepolarized microphone can be used with a standard Microphone Power Supply designed for externally polarized microphones, and its preamplifier, provided the supply voltage is set to zero.

Phantom powered microphone systems use a 3 pin XLR connector. A phantom powered microphone system should use a 48V phantom power supply or signal conditioner for optimum performance; however these microphone systems may be powered with a 24V or a 12V phantom power supply, but this will limit the maximum output voltage.



*Externally Polarized Microphone System*




*Prepolarized Microphone System*



*Phantom Powered Microphone System*

The phantom powered preamp may be used with either a 1/4" or a 1/2" microphone cartridge by using the adapter provided. All IEC 61094-4 compliant microphones can be used with the phantom powered preamp.

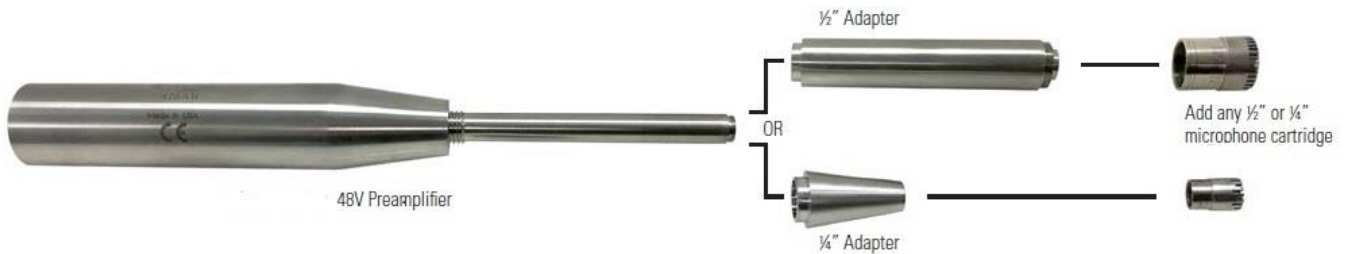

*Adapters for Phantom Powered Preamp*

**4.0 Taking Measurements**

The following formula is used to calculate the pressure measured by the microphone from the output voltage signal. The sensitivity of a microphone is typically measured at 250 Hz.

$$Pressure (Pa) = Voltage (mV) / Sensitivity (mV/Pa).$$

The lowest amplitude a healthy human ear can detect is 20 millionths of a Pascal (20µPa). Another scale more commonly used to describe sound pressure level is the decibel (dB). To convert the output voltage signal (measured in Vrms) to sound pressure level (measured in decibels), use the following formula:

$$SPL = \left( 20 \text{Log} \left( \frac{V_{rms}}{S P_{ref}} \right) \right) dB$$

where  $S$  is the sensitivity of the microphone in mV/Pa, and  $P_{ref}$  is the reference pressure in air, which is  $20 \times 10^{-6}$  Pa. The decibel scale is logarithmic and more closely matches the response reactions of the human ear to the pressure fluctuations. Some examples of typical sound pressure levels are shown in the table below.

| dB  | Pressure   | Example              |
|-----|------------|----------------------|
| 0   | 0.00002 Pa | Threshold of Hearing |
| 60  | 0.02 Pa    | Business Office      |
| 80  | 0.2 Pa     | Shop Noise           |
| 94  | 1 Pa       | Large Truck          |
| 100 | 2 Pa       | Jackhammer           |
| 120 | 20 Pa      | Airplane Take-Off    |
| 140 | 200 Pa     | Threshold of Pain    |

At very high-pressure amplitudes, the microphone’s diaphragm will start to distort the measured sound pressure. The maximum rated sound pressure level of a microphone is expressed as the amplitude at which the Total Harmonic Distortion (THD) reaches a specified amount, typically 3% THD. It is important to note that the highest sound pressure level that can be measured with a microphone system may be limited by other parts of the system, such as the preamplifier, signal conditioner, or instrumentation. Conversely, the Cartridge Thermal Noise (CTN) specification provides the lowest measurable sound pressure level that can be detected above the electrical noise inherent within the microphone.

Temperature and pressure will affect the sensitivity of a microphone but these effects can be accounted for by adjusting the recorded microphone values using the coefficients specified for each microphone model. Simply calculate the difference in temperature and ambient pressure from those recorded during calibration and multiply this value by the proper coefficient to determine the sensitivity offset. In most cases, the offset will be very small and is therefore unnecessary.

## 5.0 Accessories

### *Transducer Electronics Data Sheet (TEDS)*

Preamplifiers can incorporate TEDS devices, which have a built in read/write memory that contains relevant information about the sensor and its use. Information includes manufacturer name, model number, serial number, sensitivity, etc. The operation of TEDS devices is defined by IEEE P1451.4. A TEDS microphone system includes a microphone mated with a preamplifier that contains the TEDS memory programmed with both the microphone and preamplifier information. This is particularly helpful when using large channel count systems and array set-up.

### *A-Weight Inline Filter*

The inline filter is used in conjunction with an ICP® preamplifier to provide A-weighting for acoustical measurements. The filter’s frequency response is weighted according to the A-weighting filter portion of both ANSI S1.4 and IEC 60651 Type 1 Sound Level Meter Standards. ICP® signal conditioners of 4 mA or greater are recommended when using inline filters.

### *Windscreens and Nose cones*

Wind induced noise can be reduced by using a windscreen. This can offer some protection against dust particles and mechanical damage. In the presence of high-speed airflow from a well-defined direction, such as wind tunnels, a nose cone is recommended. When using windscreens and noise cones, the frequency response of the microphone will be attenuated at higher frequencies.



### *Clamps and stands*

When holding a microphone in place, it is important to minimize the influence of the stand on the sound being measured. This can be accomplished by using low profile stands and clamps available from PCB.

### *Cables and Electronics*

PCB carries LEMO<sup>®</sup> cables as well as coaxial cables with BNC and 10-32 connectors. Traditional externally polarized microphone power supplies along with a variety of ICP<sup>®</sup> signal conditioners are available that will fit almost any need.

## **6.0 Maintenance**

Microphones are very stable over long periods of time, provided they are handled and stored properly. The microphone contains fragile components that can be damaged by misuse, in particular the diaphragm, which is made up of a very thin proprietary material and should be kept clean of dust, dirt, moisture and free any type of imperfection (scratch, dent, etc.).

The microphone's grid cap is designed to let the true sound pressure level through to the diaphragm while preventing items from coming in contact with it. We do not recommend that you ever remove the grid cap or clean the microphone. If you take the precautionary measures to keep the microphone clean and dry, it should not be necessary. Use of accessories, like windscreens, and desiccants will help keep moisture off the microphone and maintain the specified sensitivity level. Nose cones will help keep turbulence off the microphone diaphragm and allow the sound pressure to be measured with greater accuracy.

Keep the microphone and preamplifier assembled while preparing for testing. Keep the rubber maintenance caps on the preamplifier's electrical connector only. Do not place these rubber caps over the microphone. This will create a vacuum and undo pressure on the microphone diaphragm, which can stretch the diaphragm and cause a change in sensitivity. Store the microphones and preamplifiers in their protective cases when not in use. With proper maintenance, the microphone and preamplifier should provide stable and accurate results for years to come.

Dust, rain, oil, moisture or exposure to extreme temperatures may adversely affect the microphone and preamplifier's performance. If the microphone or the inside of the connection area of the preamplifier becomes contaminated, use a light pressure rubber bulb to gently blow clean, dry air onto the unit in order to remove the dust. In the event that you absolutely must take off the grid cap and clean the microphone diaphragm, we recommend using a blow bulb or a light pressure, clean and dry air hose to gently blow contamination off the diaphragm. The direction of the air should be parallel with the diaphragm, not directly (0 degree incidence) pointed at the diaphragm. Do not touch the microphone's diaphragm with your fingers or let it come in contact with any sharp or pointed object. Please note that any contact to the microphone's diaphragm can negatively impact the sensitivity and long term stability of the microphone.

If the microphone is ever dropped or comes into contact with any contamination, or is exposed to extreme temperatures, we recommend immediate recalibration of the microphone. Please note that heat from your hands can affect the calibration results. It is always good practice to wait a minimum of 30 seconds after placing the microphone on a test system before taking a calibration reading in order to minimize the effect that heat from your hands has on the calibration.

## **7.0 Calibration**

PCB offers recalibration services for our precision microphones, as well as units produced by other A2LA manufacturers. Our internal metrology laboratory is certified to ISO 9001, accredited by A2LA to ANSI/IEC 17025 and ANSI/NCSL Z540-1, complies with ISO 10012-1 (and former MIL-STD-45662A), and uses equipment directly traceable to one or more of the following National Labs (NIST, PTB or DFM). Our investment in equipment, traceability and conformance to industry standards ensures accurate calibration against relevant specifications. We also carry a line of acoustic calibrators that can be used to calibrate microphone sensitivity on site as needed.

Hand calibration of sensitivity for most prepolarized microphones may be performed with a Larson Davis CAL250 or CAL200 (or equivalent). The CAL250 produces 114 dB SPL at 251.2 Hz. The CAL 200 produces either 94 dB or 114 dB (user selectable) at 1000 Hz. Note that both the CAL250 and CAL 200 are compliant with ANSI S1.40-2006, Specifications and Verification Procedures for Sound Calibrators, Class1 and IEC 60942-2003, Class 1, Sound Calibrators.

## 8.0 Warranty and Service

All equipment and repair services provided by PCB Piezotronics, Inc. are covered by a warranty against defective material and workmanship under a **Total Customer Satisfaction** policy. If, at any time, for any reason, you are not completely satisfied with any PCB product, PCB will repair, replace, or exchange it at no charge. You may also choose to have your purchase price refunded. See the supplemental sheet, contained with this manual, for information on our service, repair and return policies, procedures and instructions. When unexpected problems arise, call our 24-Hour SensorLine<sup>SM</sup> (716-684-0001) to speak with an Application Engineer. Visit [www.pcb.com](http://www.pcb.com) for a complete statement of our warranty.

3425 Walden Avenue, Depew, NY 14043-2495  
E-Mail: [info@pcb.com](mailto:info@pcb.com)  
Website: [www.pcb.com](http://www.pcb.com)


24-hour SensorLine<sup>SM</sup>: 716-684-0001  
U.S.A. Fax: 716-684-0987  
Toll-free (in the U.S.A.): 800-828-8840

A PCB GROUP COMPANY      ISO 9001 CERTIFIED      A2LA ACCREDITED to ISO 17025  
© 2014 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB and ICP are registered trademarks of PCB Group, Inc. Sensor Line is a service mark of PCB Group, Inc. All other trademarks are properties of the respective owners.

Manual Number: 27042  
Manual Revision: E  
ECO 46576



Printed in the U.S.A.

| Model Number<br><b>377B13</b>  | <h1>PRECISION CONDENSER MICROPHONE</h1>  |         | Revision: B<br>ECN #: 45005 |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
|--|--|---------|-----------------------------|--|------|------|--|----------|----------|--|--------------------|--------------------|-----|------------|------------|-----|--------------|--------------|--|-------------------|-------------------|--|---------------|---------------|--|-----------|-----------|-----|--------------------|--------------------|-----|------------------|------------------|-----|------|------|--|----------------|----------------|--|-------------|-------------|--------|---------------|---------------|--------|----------------|----------------|-----|-----------------|-----------------|-----|-------|-------|-----|-----|-----|-----|-----------------|-----------------|--|------|------|--|-----------------|------------------|--|--------------|------------------|--|-------------------|-------------------|--|------------------|-------------------|--|---------|--------|-----|---|
| <b>Performance</b><br>Nominal Microphone Diameter<br>Frequency Response Characteristic<br>Open Circuit Sensitivity(± 2 dB)<br>Open Circuit Sensitivity<br>Frequency Range(± 1 dB)<br>Frequency Range(± 2 dB)<br>Lower Limiting Frequency(-3 dB)<br>Resonant Frequency(90° Phase Shift)<br>Inherent Noise<br><br>Dynamic Range(3% Distortion Limit)<br>Standards Designation(IEC 61094-4)<br><b>Environmental</b><br>Temperature Range(Operating)<br>Temperature Coefficient of Sensitivity(+14 to +122°F (-10 to +50°C))<br>Static Pressure Coefficient<br>Humidity Coefficient of Sensitivity(0 to 100%, non-condensing)<br>Influence of Axial Vibration(0.1g (1 m/s <sup>2</sup> ))<br><b>Electrical</b><br>Capacitance(Polarized)<br>Polarization Voltage<br><b>Physical</b><br>Housing Material<br>Venting<br>Mounting Thread(Preamplifier)<br>Mounting Thread(Grid)<br>Size (Diameter x Height)(with grid)<br><br>Size (Diameter x Height)(without grid)<br><br>Weight<br><br><i>All specifications are at room temperature unless otherwise specified.<br/>         In the interest of constant product improvement, we reserve the right to change specifications without notice.</i> | <table border="1"> <thead> <tr> <th data-bbox="751 220 877 245">ENGLISH</th> <th data-bbox="953 220 989 245">SI</th> <th data-bbox="1066 220 1094 245"></th> </tr> </thead> <tbody> <tr> <td data-bbox="779 248 829 269">1/2"</td> <td data-bbox="953 248 989 269">1/2"</td> <td></td> </tr> <tr> <td data-bbox="764 272 877 293">Pressure</td> <td data-bbox="932 272 1010 293">Pressure</td> <td></td> </tr> <tr> <td data-bbox="724 297 877 318">-38.0 dB re 1 V/Pa</td> <td data-bbox="890 297 1045 318">-38.0 dB re 1 V/Pa</td> <td data-bbox="1066 297 1094 318">[3]</td> </tr> <tr> <td data-bbox="751 321 850 342">12.6 mV/Pa</td> <td data-bbox="917 321 1024 342">12.6 mV/Pa</td> <td data-bbox="1066 321 1094 342">[3]</td> </tr> <tr> <td data-bbox="751 345 850 367">4 to 7500 Hz</td> <td data-bbox="917 345 1024 367">4 to 7500 Hz</td> <td></td> </tr> <tr> <td data-bbox="724 370 877 391">3.15 to 20,000 Hz</td> <td data-bbox="890 370 1045 391">3.15 to 20,000 Hz</td> <td></td> </tr> <tr> <td data-bbox="751 394 850 415">1.0 to 2.4 Hz</td> <td data-bbox="917 394 1024 415">1.0 to 2.4 Hz</td> <td></td> </tr> <tr> <td data-bbox="764 418 850 440">19,000 Hz</td> <td data-bbox="932 418 1024 440">19,000 Hz</td> <td data-bbox="1066 418 1094 440">[1]</td> </tr> <tr> <td data-bbox="737 443 877 464">18 dB(A) re 20 μPa</td> <td data-bbox="890 443 1045 464">18 dB(A) re 20 μPa</td> <td data-bbox="1066 443 1094 464">[1]</td> </tr> <tr> <td data-bbox="724 483 877 505">162 dB re 20 μPa</td> <td data-bbox="890 483 1045 505">162 dB re 20 μPa</td> <td data-bbox="1066 483 1094 505">[1]</td> </tr> <tr> <td data-bbox="764 508 829 529">WS2P</td> <td data-bbox="932 508 989 529">WS2P</td> <td></td> </tr> <tr> <td data-bbox="737 565 863 586">-40 to +248 °F</td> <td data-bbox="911 565 1031 586">-40 to +120 °C</td> <td></td> </tr> <tr> <td data-bbox="751 589 850 610">0.004 dB/°F</td> <td data-bbox="932 589 1024 610">0.008 dB/°C</td> <td data-bbox="1066 589 1094 610">[1][3]</td> </tr> <tr> <td data-bbox="737 613 863 634">-0.006 dB/kPa</td> <td data-bbox="911 613 1031 634">-0.006 dB/kPa</td> <td data-bbox="1066 613 1094 634">[1][3]</td> </tr> <tr> <td data-bbox="724 638 877 659">± 0.001 dB/%RH</td> <td data-bbox="890 638 1045 659">± 0.001 dB/%RH</td> <td data-bbox="1066 638 1094 659">[3]</td> </tr> <tr> <td data-bbox="724 662 877 683">66 dB re 20 μPa</td> <td data-bbox="890 662 1045 683">66 dB re 20 μPa</td> <td data-bbox="1066 662 1094 683">[1]</td> </tr> <tr> <td data-bbox="764 711 829 732">14 pF</td> <td data-bbox="932 711 989 732">14 pF</td> <td data-bbox="1066 711 1094 732">[1]</td> </tr> <tr> <td data-bbox="779 735 814 756">0 V</td> <td data-bbox="953 735 989 756">0 V</td> <td data-bbox="1066 735 1094 756">[2]</td> </tr> <tr> <td data-bbox="737 784 863 805">Stainless Alloy</td> <td data-bbox="911 784 1031 805">Stainless Alloy</td> <td></td> </tr> <tr> <td data-bbox="779 808 829 829">Rear</td> <td data-bbox="953 808 989 829">Rear</td> <td></td> </tr> <tr> <td data-bbox="724 833 877 854">0.4606 - 60 UNS</td> <td data-bbox="890 833 1045 854">11.7 mm - 60 UNS</td> <td></td> </tr> <tr> <td data-bbox="737 857 863 878">0.5 - 60 UNS</td> <td data-bbox="890 857 1045 878">12.7 mm - 60 UNS</td> <td></td> </tr> <tr> <td data-bbox="724 881 877 902">0.52 in x 0.48 in</td> <td data-bbox="890 881 1045 902">13.2 mm x 12.3 mm</td> <td></td> </tr> <tr> <td data-bbox="737 922 863 943">0.5 in x 0.46 in</td> <td data-bbox="890 922 1045 943">12.7 mm x 11.8 mm</td> <td></td> </tr> <tr> <td data-bbox="764 963 829 984">0.23 oz</td> <td data-bbox="932 963 989 984">6.5 gm</td> <td data-bbox="1066 963 1094 984">[1]</td> </tr> </tbody> </table> | ENGLISH | SI                          |  | 1/2" | 1/2" |  | Pressure | Pressure |  | -38.0 dB re 1 V/Pa | -38.0 dB re 1 V/Pa | [3] | 12.6 mV/Pa | 12.6 mV/Pa | [3] | 4 to 7500 Hz | 4 to 7500 Hz |  | 3.15 to 20,000 Hz | 3.15 to 20,000 Hz |  | 1.0 to 2.4 Hz | 1.0 to 2.4 Hz |  | 19,000 Hz | 19,000 Hz | [1] | 18 dB(A) re 20 μPa | 18 dB(A) re 20 μPa | [1] | 162 dB re 20 μPa | 162 dB re 20 μPa | [1] | WS2P | WS2P |  | -40 to +248 °F | -40 to +120 °C |  | 0.004 dB/°F | 0.008 dB/°C | [1][3] | -0.006 dB/kPa | -0.006 dB/kPa | [1][3] | ± 0.001 dB/%RH | ± 0.001 dB/%RH | [3] | 66 dB re 20 μPa | 66 dB re 20 μPa | [1] | 14 pF | 14 pF | [1] | 0 V | 0 V | [2] | Stainless Alloy | Stainless Alloy |  | Rear | Rear |  | 0.4606 - 60 UNS | 11.7 mm - 60 UNS |  | 0.5 - 60 UNS | 12.7 mm - 60 UNS |  | 0.52 in x 0.48 in | 13.2 mm x 12.3 mm |  | 0.5 in x 0.46 in | 12.7 mm x 11.8 mm |  | 0.23 oz | 6.5 gm | [1] | <p data-bbox="1402 224 1633 245" style="text-align: center;"><b>OPTIONAL VERSIONS</b></p> <p data-bbox="1129 248 1915 293">Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.</p> <hr/> <p data-bbox="1129 500 1220 521"><b>NOTES:</b></p> <p data-bbox="1129 524 1262 586">[1] Typical.<br/>         [2] Pre-polarized<br/>         [3] re 250 Hz</p> <hr/> <p data-bbox="1129 756 1402 777"><b>SUPPLIED ACCESSORIES:</b></p> <p data-bbox="1129 781 1682 802">Model ACS-20 Calibration of Precision Condenser Microphones (1)</p> <p data-bbox="1129 854 1915 919">         Entered: LK      Engineer: MT      Sales: MV      Approved: MT      Spec Number:<br/>         Date: 10/13/2016    Date: 10/13/2016    Date: 10/13/2016    Date: 10/13/2016      <b>57497</b> </p> <div data-bbox="1129 967 1577 1044" style="text-align: center;">  <p>3425 Walden Avenue, Depew, NY 14043</p> </div> <div data-bbox="1661 967 1892 1044" style="text-align: right;"> <p><b>Phone: 716-684-0001</b><br/> <b>Fax: 716-684-0987</b><br/> <b>E-Mail: info@pcb.com</b></p> </div> |
| ENGLISH  | SI   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 1/2"   | 1/2"   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| Pressure   | Pressure   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| -38.0 dB re 1 V/Pa   | -38.0 dB re 1 V/Pa   | [3]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 12.6 mV/Pa   | 12.6 mV/Pa   | [3]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 4 to 7500 Hz   | 4 to 7500 Hz   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 3.15 to 20,000 Hz  | 3.15 to 20,000 Hz  |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 1.0 to 2.4 Hz  | 1.0 to 2.4 Hz  |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 19,000 Hz  | 19,000 Hz  | [1]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 18 dB(A) re 20 μPa   | 18 dB(A) re 20 μPa   | [1]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 162 dB re 20 μPa   | 162 dB re 20 μPa   | [1]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| WS2P   | WS2P   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| -40 to +248 °F   | -40 to +120 °C   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 0.004 dB/°F  | 0.008 dB/°C  | [1][3]  |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| -0.006 dB/kPa  | -0.006 dB/kPa  | [1][3]  |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| ± 0.001 dB/%RH   | ± 0.001 dB/%RH   | [3]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 66 dB re 20 μPa  | 66 dB re 20 μPa  | [1]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 14 pF  | 14 pF  | [1]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 0 V  | 0 V  | [2]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| Stainless Alloy  | Stainless Alloy  |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| Rear   | Rear   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 0.4606 - 60 UNS  | 11.7 mm - 60 UNS   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 0.5 - 60 UNS   | 12.7 mm - 60 UNS   |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 0.52 in x 0.48 in  | 13.2 mm x 12.3 mm  |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 0.5 in x 0.46 in   | 12.7 mm x 11.8 mm  |         |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |
| 0.23 oz  | 6.5 gm   | [1]     |                             |  |      |      |  |          |          |  |                    |                    |     |            |            |     |              |              |  |                   |                   |  |               |               |  |           |           |     |                    |                    |     |                  |                  |     |      |      |  |                |                |  |             |             |        |               |               |        |                |                |     |                 |                 |     |       |       |     |     |     |     |                 |                 |  |      |      |  |                 |                  |  |              |                  |  |                   |                   |  |                  |                   |  |         |        |     |   |



2

1


PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

| REVISIONS |                      |       |
|-----------|----------------------|-------|
| REV       | DESCRIPTION          | DIN   |
| NR        | RELEASED TO DRAFTING | 44117 |


58153

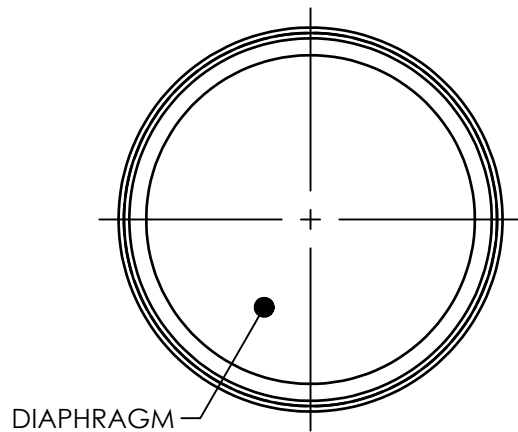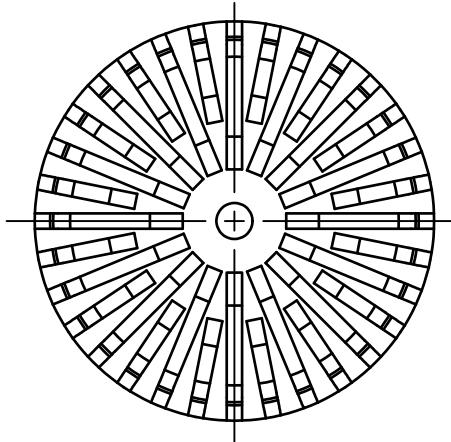

DIAPHRAGM

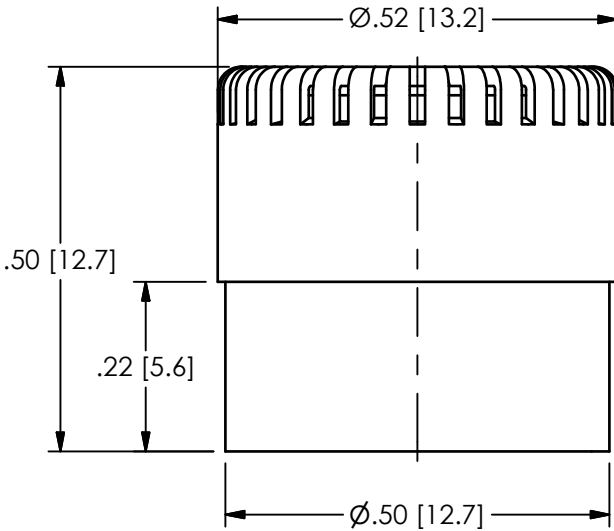

WITH GRID CAP

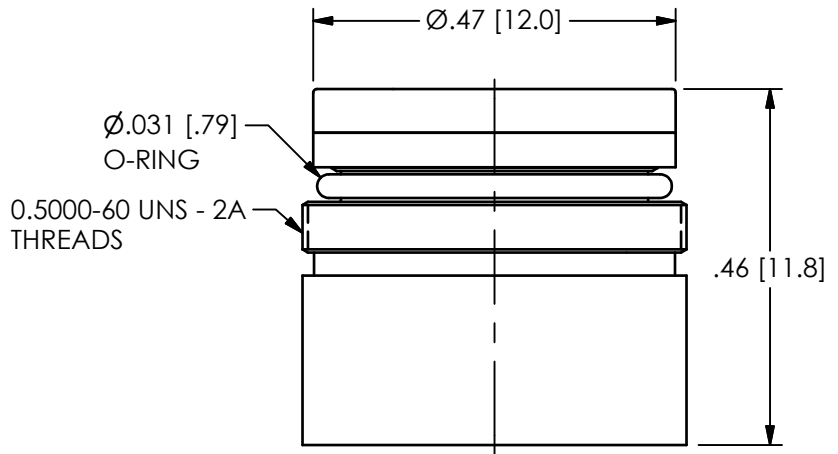

WITHOUT GRID CAP

|  |   |   |         |         |         |          |         |  |                          |
|--|---|---|---------|---------|---------|----------|---------|--|--------------------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: |   | DRAWN   |         | CHECKED |         | ENGINEER |         | <br>3425 WALDEN AVE. DEPEW, NY 14043<br>(716) 684-0001 E-MAIL: sales@pcb.com |                          |
| DIMENSIONS IN INCHES                       | DIMENSIONS IN MILLIMETERS [IN BRACKETS] | JDM   | 5/27/15 | JDM     | 5/27/15 | NJL      | 5/27/15 |  |                          |
| DECIMALS XX ±.03<br>XXX ±.010              | DECIMALS X ± 0.8<br>XX ± 0.25           | TITLE<br>OUTLINE DRAWING<br>1/2" PRE-POLARIZED<br>MICROPHONES |         |         |         |          |         |  | CODE IDENT. NO.<br>52681 |
| ANGLES ± 2 DEGREES                         | ANGLES ± 2 DEGREES                      |   |         |         |         |          |         |  | SCALE: 4X                |
| FILLETS AND RADII<br>.003 - .005           | FILLETS AND RADII<br>0.07 - 0.13        |   |         |         |         |          |         | DWG. NO.<br><b>58153</b>   |                          |

2

1

1

B

B

A

A