



Model 132B38

## MICRO ICP® PRESSURE SENSOR

- Small size fits in wind tunnel models
- Very high frequency response
- Centered element improves accuracy


### Typical Applications

- Explosives research
- Time of arrival measurements
- Projectile detection systems
- Targeting
- Wind tunnel boundary layer transition



For measurement of short wavelength pressure pulses, 132B38 piezoelectric ICP® micro pressure sensor features 0.5 microsecond response. The sensor's micro-second response time accurately measures pressure peaks from fast rising shock waves and very high frequency pressure phenomena. The 1mm diameter sensing element allows measurement of short wavelength incident pressure waves. A short time constant filters off the static component of wind tunnel pressure, allowing differentiation of consecutive pulses.



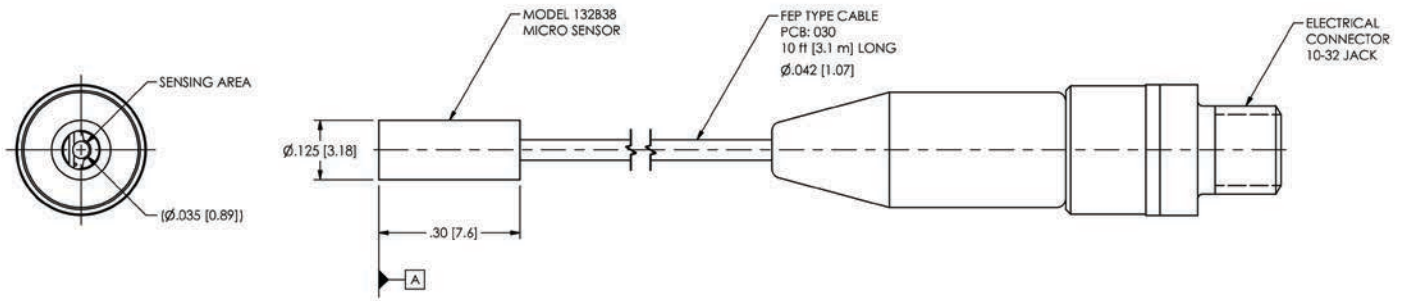

SPECIFICATIONS		
	English:	SI:
<b>Performance</b>		
Measurement Range	50 psi	345 kPa
Sensitivity (±30 %)	140 mV/psi	20.3 mV/kPa
Maximum Pressure (Dynamic)	800 psi	5516 kPa
Resolution [2]	0.001 psi	0.007 kPa
Rise Time (Incident) [1]	≤3 μ sec	≤3 μ sec
Rise Time (Reflected)	≤1 μ sec	≤1 μ sec
Low Frequency Response (-5 %)	11000 Hz	11000 Hz
High Frequency Response [3][2]	1 MHz	1 MHz
<b>Environmental</b>		
Temperature Range (Operating)	-13 to +175 °F	-25 to +79 °C
<b>Electrical</b>		
Output Polarity (Positive Pressure)	Positive	
Discharge Time Constant (at room temp) [4]	≥.000045 sec	
Excitation Voltage	20 to 30 VDC	
Constant Current Excitation	2 to 20 mA	
Output Impedance	≤100 Ohm	
Output Bias Voltage	8 to 14 VDC	
<b>Physical</b>		
Sensing Element	Ceramic	
Housing Material	Stainless Steel	
Sealing	Epoxy	
Weight [5]	12.77 gm	
Cable Termination	10-32 Coaxial Jack	
Cable Type	030 Coaxial	

### Product Notes

- [1] Rise time in air at Mach 1.
- [2] Typical.
- [3] High frequency response may be limited by supply current and output cable length.
- [4] Calculated.
- [5] Typical; with cable.

All specifications are at room temperature unless otherwise specified.



3425 Walden Avenue, Depew, NY 14043-2495 USA  
 Toll-Free in the USA: 800.828.8840 | 24-hour SensorLine<sup>SM</sup>: 716.684.0001  
 Fax: 716.684.0987 | Email: info@pcb.com

| VISIT US AT WWW.PCB.COM |

PCB® is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLine<sup>SM</sup>, and a global distribution network **PCB® IS COMMITTED TO TOTAL CUSTOMER SATISFACTION.**