

# TESTING LABORATORIES SENSORS AND INSTRUMENTATION







# **ACCELEROMETERS**

The most extensive offering of dynamic sensors from any manufacturer; utilizing piezoelectric and MEMS sensing elements with ICP®, charge, and DC voltage outputs.

- Over 200 stock models ranging from 1.0 μg to 200,000 g
- Frequency range: 0 Hz to 26 kHz
- Operating temperatures from -452 to +1,200 °F (-269 to +650 °C)
- Sensitivities from 0.05 mV/g (shock) to 10.0 V/g (seismic)
- Special models for high temperature, cryogenics, high frequency/filters, isolation



## **FORCE SENSORS**

Dynamic and quasi-static sensors used in actuation, impact, impulse, reaction, and compression / tension; comprised of force rings, force links, and impact sensors.

- Over 50 models ranging from 10 lb to 100,000 lb (44.5 N to 444.8 kN)
- Frequency range: 0.0003 Hz to 100 kHz
- Operating temperatures from -100 to +400 °F (-73 to +204 °C)
- Sensitivities from 0.05 mV/lb to 2,200 mV/lb
- ICP® & charge outputs available



## **ACOUSTICS**

A diverse offering of sound measurement products, including prepolarized (OV), externally polarized (200V), and array microphones. Complemented by an assortment of preamplifiers, signal conditioners, filters, handheld calibrators, and accessories.

- Dynamic ranges from 6.5 dBA to 183 dB
- Frequency range: 0.1 Hz to 100 kHz
- Operating temperatures from -40 to +1,472 °F (-40 to +800 °C)
- Sensitivities from 0.25 mV/Pa to 450 mV/Pa
- Special models for 48V phantom power, water and dust concerns, ATEX hazard approved, and more



## PRESSURE SENSORS

Dynamic and static pressure sensors with the ability to measure small pressure fluctuations at high static pressures. Used in many applications such as: blast / ballistic, wind tunnels, hydraulic / pneumatic systems, and general pressure measurement requiring fast rise time with a wide dynamic range.

- Over 100 models ranging from 1 psi to 120,000 psi
- Frequency range: 0 Hz to 1 MHz
- Operating temperatures from -320 to +1,200 °F (-196 to +650 °C)
- Sensitivities from 0.05 mV/psi to 5,000 mV/psi
- Special models for high temperature, cryogenics, media compatibility, isolation



# **ADDITIONAL PRODUCTS AND SERVICES**

## **CALIBRATION &** REPAIR SERVICES



## RENTAL **PROGRAMS**




## **CABLES & ACCESSORIES**



# **SIGNAL CONDITIONERS** & ELECTRONICS



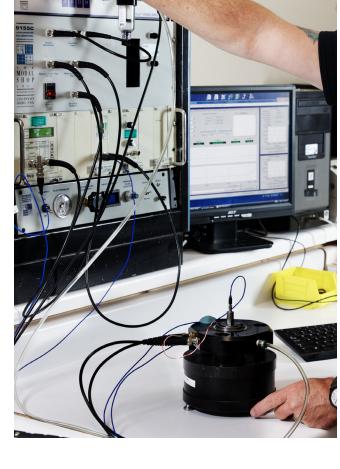









3425 Walden Avenue, Depew, NY 14043-2495 USA Toll-Free in the USA: 800 828 8840

26 Edelman, Irvine CA 92618 USA Toll-Free in the USA: 1 716 684 8975 Website: www.endevco.com

193 Joseph Carrier Vaudreuil, QC J7V 5V5 Canada 450-424-0033

Phone: 1 716 684 0001 | Email: info@pcb.com

Website: www.dalimar.ca

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and the Control of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Energistered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

