



SERIES 660

LOW COST, EMBEDDABLE ACCELEROMETERS

- Choice of charge mode, ICP® and 3-wire low power varieties
- Mountable via adhesive or soldering with choice of integral cable or solder pin connections
- Variety of sensitivities to accommodate a wide variety of applications




IDEAL FOR CONTINUOUS VIBRATION MONITORING IN HIGH-VOLUME AND COMMERCIAL OEM APPLICATIONS

Embeddable accelerometers offer an affordable solution for vibration and shock measurements in high-volume and commercial OEM applications. The units are particularly well suited for shock and impact detection of packages or components, as well as bearing and gear mesh vibration measurements in predictive maintenance and condition monitoring requirements. The compact designs may be imbedded into machinery at the OEM level to provide value-added monitoring protection.


The units employ field-proven, solid-state, piezoelectric sensing elements for durability and broadband performance. Choose from either charge mode types, which achieve high operating temperatures or voltage mode ICP® types, with built-in signal conditioning microelectronics, for simplified operation and connectivity to data acquisition and vibration monitoring instrumentation.

2-Wire ICP® Configuration

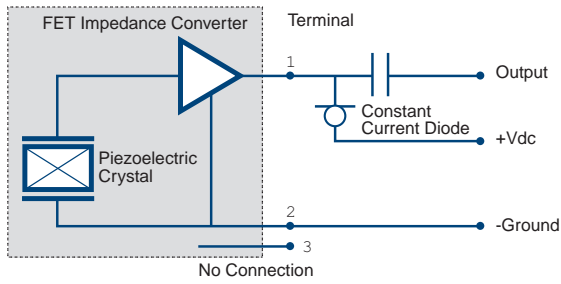


BASE MODEL	
66	Pellet Accelerometer
Sensor Input	
102A	Low Profile TO-5, 10 mV/g Sensitivity, 500 g Measurement Range
122A	Low Profile TO-5, 50 mV/g Sensitivity, 100 g Measurement Range
162A	Low Profile TO-5, 1 mV/g Sensitivity, 5000 g Measurement Range
212A	TO-5, 100 mV/g Sensitivity, 50 g Measurement Range
312A	TO-8, 100 mV/g Sensitivity, 50 g Measurement Range
322A	TO-8, 500 mV/g Sensitivity, 10 g Measurement Range
332A	TO-8, 1000 mV/g Sensitivity, 5 g Measurement Range
Output	
PZ	Positive output along Z-axis
NZ	Negative output along Z-axis
Mounting	
1	Header Pins
2	Integral 1ft Cable

SPECIFICATIONS			
Package Size	Low Profile TO-5	TO-5	TO-8
Performance			
Sensitivity	See "Base Model" Table		
Measurement Range	See "Base Model" Table		
Frequency Range	0.5 to 10,000 Hz		0.5 to 5000 Hz
Resonant Frequency	>25 kHz		>16 kHz
Broadband Resolution	1800 µg rms	350 µg rms	35 µg rms
Non-Linearity	≤1%		
Transverse Sensitivity	≤7%		
Environmental			
Overload Limit (Shock)	5000 g pk 49050 m/s ² pk		
Temperature Range	65 to +185 °F -54 to +85 °C		
Electrical			
Settling Time	≤2 sec		≤10 sec
Discharge Time Constant	≥0.3 sec		≥1 sec
Excitation Voltage	18 to 28 VDC		
Constant Current Excitation	2 to 20 mA		
Output Impedance	<100 ohm	<150 ohm	<550 ohm
Output Bias Voltage	8 to 12 VDC		
Physical			
Sensing Element	Ceramic		
Sensing Geometry	Shear		
Housing Material	Stainless Steel		
Sealing	Hermetic		
Mounting	Adhesive or Solder		
Weight	0.08 oz 2.2 g	0.1 oz 3.0 g	0.88 oz 25 g

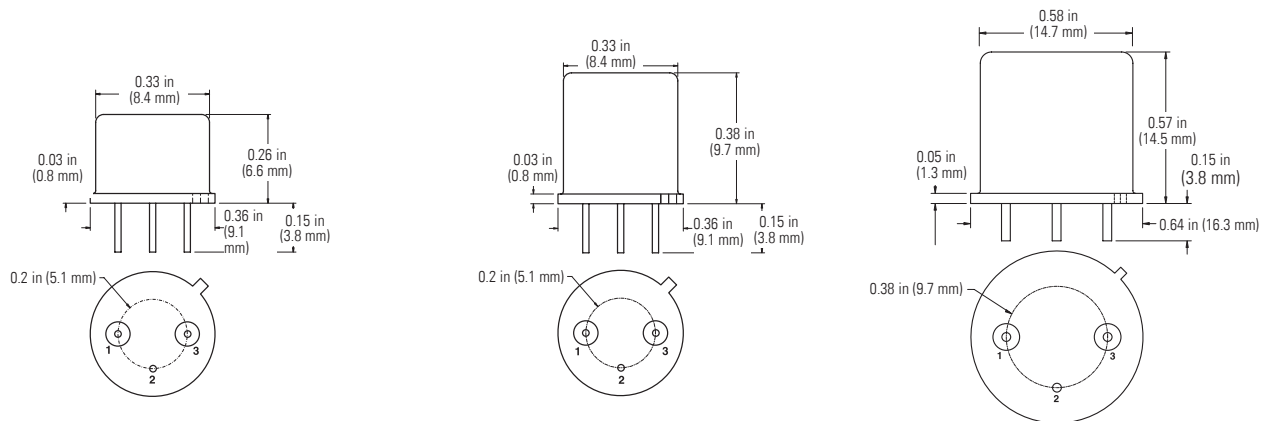


3-Wire Low Power Configuration

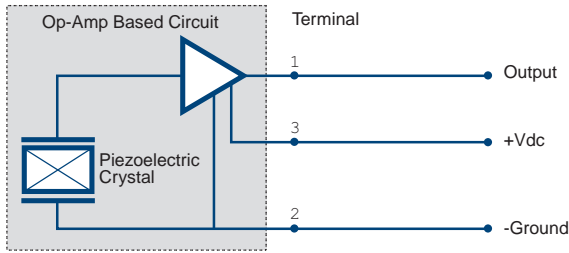


BASE MODEL	
66	Pellet Accelerometer
Sensor Input	
103P	Low Profile TO-5, 10 mV/g Sensitivity, 200 g Measurement Range
203P	TO-5, 50 mV/g Sensitivity, 20 g Measurement Range
213P	TO-5, 100 mV/g Sensitivity, 20 g Measurement Range
313P	TO-8, 100 mV/g Sensitivity, 20 g Measurement Range
323P	TO-8, 500 mV/g Sensitivity, 4 g Measurement Range
333P	TO-8, 1000 mV/g Sensitivity, 2 g Measurement Range
Output	
PZ	Positive output along Z-axis
NZ	Negative output along Z-axis
Mounting	
1	Header Pins
2	Integral 1ft Cable

SPECIFICATIONS			
Package Size	Low Profile TO-5	TO-5	TO-8
Performance			
Sensitivity	See "Base Model" Table		
Measurement Range	$(0.5 \times \text{Excitation Voltage}) - 0.5 \text{ V}$ Sensitivity (V/g)		
Frequency Range	0.5 to 10000 Hz	0.5 to 5000 Hz	
Resonant Frequency	>25 kHz		>16 kHz
Broadband Resolution	4900 $\mu\text{g rms}$	1700 $\mu\text{g rms}$	1040 $\mu\text{g rms}$
Non-Linearity	$\leq 1\%$		
Transverse Sensitivity	$\leq 7\%$		
Environmental			
Overload Limit (Shock)	5000 g pk 49050 m/s^2 pk		
Temperature Range	65 to +185 °F -54 to +85 °C		
Electrical			
Settling Time	≤ 2.5 sec	≤ 2 sec	
Discharge Time Constant	≥ 0.3 sec	≥ 0.4 sec	
Excitation Voltage	3 to 12 VDC		
Constant Current Excitation	0.75 mA		
Output Impedance	<100 ohm		
Output Bias Voltage	0.5 x Excitation Voltage		
Physical			
Housing Material	Stainless Steel		
Sealing	Hermetic		
Mounting	Adhesive or Solder		
Weight	0.08 oz 2.2 g	0.1 oz 3.0 g	0.88 oz 25 g

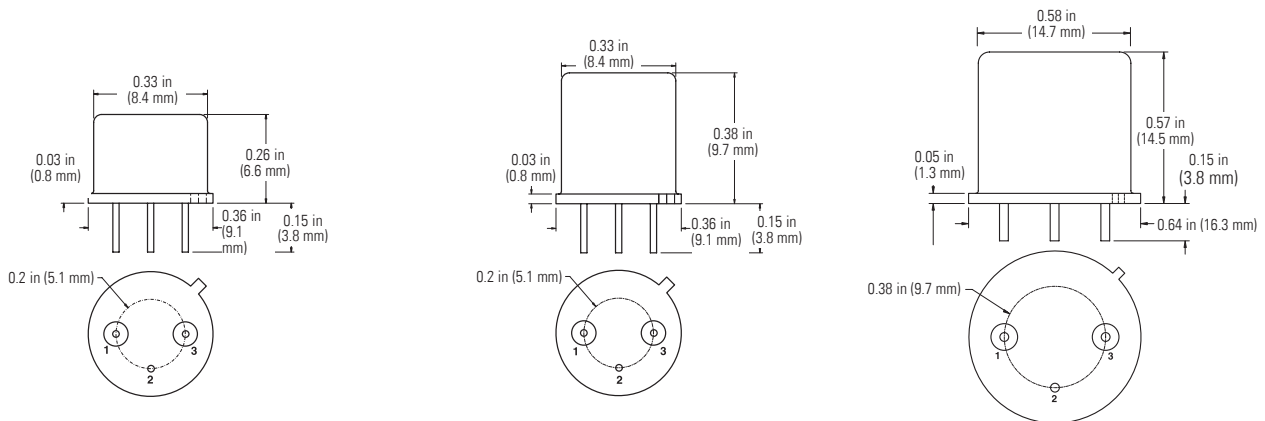


2-Wire Charge Mode

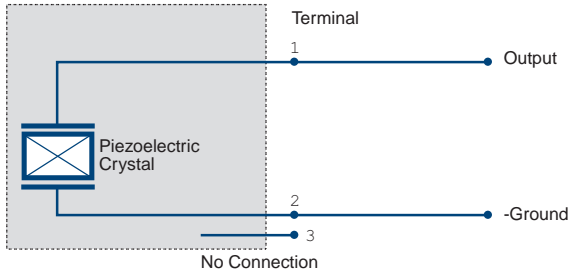

BASE MODEL	
66	Pellet Accelerometer
Sensor Input	
192C	Low Profile TO-5, 5 pC/g Sensitivity
292C	TO-5, 11 pC/g Sensitivity
392C	TO-8, 100 pC/g Sensitivity
Output	
PZ	Positive output along Z-axis
NZ	Negative output along Z-axis
Mounting	
1	Header Pins
2	Integral 1ft Cable

SPECIFICATIONS			
Package Size	Low Profile TO-5	TO-5	TO-8
Performance			
Sensitivity	See "Base Model" Table		
Frequency Range	10 kHz	5 kHz	
Resonant Frequency	>25 kHz	>16 kHz	
Non-Linearity	≤1%		
Transverse Sensitivity	≤7%		
Environmental			
Overload Limit (Shock)	5000 g pk 49050 m/s ² pk		
Temperature Range	65 to +185 °F -54 to +85 °C	65 to +250 °F -54 to +121 °C	
Electrical			
Capacitance	350 pF	2700 pF	
Physical			
Housing Material	Stainless Steel		
Sealing	Hermetic		
Mounting	Adhesive or Solder		
Weight	0.08 oz 2.2 g	0.1 oz 3.0 g	0.88 oz 25 g

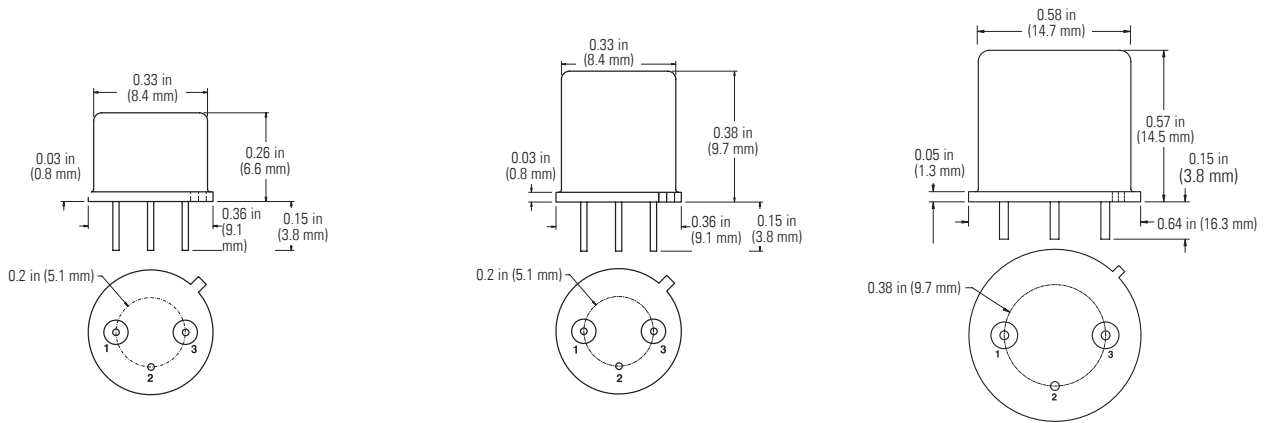

3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in the USA: 800 828 8840

Phone: 1 716 684 0001 | Email: info@pcb.com

PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.

© 2021 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLineSM is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States.

IMI-VIB-Series660-0321



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.