

MODAL IMPACT HAMMERS

- Compatible with standard ICP® Signal Conditioners
- Variety of hammer tips provided so excitation content can be tailored to object under test
- Extender mass included with all models except with large hammers (086D20 & 086D50)
- Modal Tuning insures the hammer's structure does not influence the measurement
- TEDS models available - typically used in high channel count & roving hammer applications




Each PCB® Modally Tuned®, ICP® instrumented impact hammer features a rugged, force sensor that is integrated into the hammer's striking surface.

The force sensor provides a measurement of the amplitude and frequency content of the energy stimulus that is imparted to a test object. Accelerometers are used in conjunction with the hammer to provide a measurement of the object's structural response due to the hammer blow.

Using multi-channel data acquisition and analysis software, the test engineer is able to ascertain a variety of mechanical properties leading to an understanding of an object's structural behavioral characteristics. Items analyzed can include resonance detection, mode shapes, transfer characteristics, and structural health – such as crack and fatigue detection.

TYPICAL APPLICATIONS

- Circuit Boards, processors & memory modules
- Small Machined Components: impellers, lightly damped panels/frames
- Medium Structures: car frames, engines, & small electric motors
- Heavier Devices: pumps, compressors, weldments, impellers
- Heavy Devices: large weldments, propellers
- Building foundations

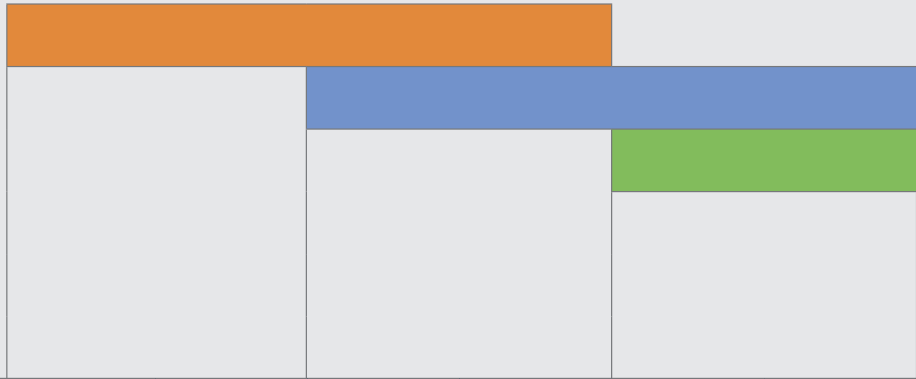

SPECIFICATIONS


Model Number	086E80		086C01		086C02		
	English	SI	English	SI	English	SI	
Performance							
Sensitivity ($\pm 15\%$)	100 mV/lbf	22.5 mV/N	50 mV/lbf	11.2 mV/N	50 mV/lbf	11.2 mV/N	
Measurement Range	± 50 lbf pk	222 N pk	± 100 lbf pk	± 444 N pk	± 100 lbf pk	± 444 N pk	
Resonant Frequency	≥ 100 kHz		≥ 15 kHz		≥ 22 kHz		
Non-Linearity	$\leq 1\%$						
Electrical							
Excitation Voltage	20 to 30 VDC						
Constant Current Excitation	2 to 20 mA						
Output Impedance	< 100 Ohm						
Output Bias Voltage	8 to 14 VDC						
Discharge Time Constant	≥ 100 sec			≥ 500 sec			
Physical							
Sensing Element	Quartz						
Sealing	Epoxy						
Hammer Mass	0.17 oz	4.8 gm	0.23 lb	0.10 kg	0.34 lb	0.16 kg	
Head Diameter	0.25 in	6.3 mm	0.62 in	1.57 cm	0.62 in	1.57 cm	
Tip Diameter	0.10 in	2.5 mm	0.25 in	0.63 cm	0.25 in	0.63 cm	
Hammer Length	4.2 in	107 mm	8.5 in	21.6 cm	8.5 in	21.6 cm	
Electrical Connection Position	Side			Bottom of Handle			
Extender Mass Weight	0.044 oz	1.25 gm	0.9 oz	25 gm	2.6 oz	75 gm	
Electrical Connector	5-44 Coaxial			BNC Jack			
TEDS Model Available							
	N/A		TLD086C01		TLD086C02		
Included Accessories							
	Calibration Certificate		Calibration Certificate		Calibration Certificate		
	018G10 Cable		081B05 10-32 Mounting Stud		081B05 10-32 Mounting Stud		
	080A109 Petro Wax		084A06 Extender Mass		084A08 Extender Mass		
	084A13 Extender mass		084B03 Hammer Tip, Hard SS		084B03 Hammer Tip, Hard SS		
	084A14 Handle, plastic		084B04 Hammer Tip, Medium		084B04 Hammer Tip, Medium		
	084A17 Handle, aluminum		084C05 Hammer Tip, Soft		084C05 Hammer Tip, Soft		
	084A28 Impact cap		084C11 Hammer Trip, Very soft		084C11 Hammer Trip, Very soft		
			085A10 Tip Cover		085A10 Tip Cover		

086C03		086C04		086D05		086D20		086D50	
English	SI	English	SI	English	SI	English	SI	English	SI
10 mV/lbf	2.25 mV/N	5 mV/lbf	1.10 mV/N	1 mV/lbf	0.23 mV/N	1 mV/lbf	0.23 mV/N	1 mV/lbf	0.23 mV/N
±500 lbf pk	±2224 N pk	±1000 lbf pk	±4448 N pk	±5000 lbf pk	±22,240 N pk	±5000 lbf pk	±22,240 N pk	±5000 lbf pk	±22,240 N pk
≥22 kHz						≥12 kHz		≥5 kHz	
≤1 %									
20 to 30 VDC									
2 to 20 mA									
<100 Ohm									
8 to 14 VDC									
≥2000 sec						≥1400 sec		≥2000 sec	
Quartz									
Epoxy						Hermetic			
0.34 lb	0.16 kg	0.34 lb	0.16 kg	0.7 lb	0.32 kg	2.4 lb	1.1 kg	12.1 lb	5.5 kg
0.62 in	1.57 cm	0.62 in	1.57 cm	1.0 in	2.50 cm	2.0 in	5.1 cm	3.0 in	7.6 cm
0.25 in	0.63 cm	0.25 in	0.63 cm	0.25 in	0.63 cm	2.0 in	5.1 cm	3.0 in	7.6 cm
8.5 in	21.6 cm	8.5 in	21.6 cm	9.0 in	22.7 cm	14.5 in	37 cm	35 in	89 cm
Bottom of Handle									
2.6 oz	75 gm	2.6 oz	75 gm	7.0 oz	200 gm	Not Available			
BNC Jack									
TLD086C03		TLD086C04		TLD086D05		TLD086D20		TLD086D50	
Calibration Certificate		Calibration Certificate		Calibration Certificate		Calibration Certificate		Calibration Certificate	
081B05 10-32 Mounting Stud		081B05 10-32 Mounting Stud		081B05 10-32 Mounting Stud		084A60 Hammer Tip, Very soft		084A31 Hammer Tip, Soft	
084A08 Extender Mass		084A08 Extender Mass		084A09 Extender Mass		084A61 Hammer Tip, Soft		084A32 Hammer Tip, Hard plastic	
084B03 Hammer Tip, Hard SS		084B03 Hammer Tip, Hard SS		084A50 Hammer Tip, Very soft		084A62 Hammer Tip, Medium			
084B04 Hammer Tip, Medium		084B04 Hammer Tip, Medium		084A51 Tip Adaptor		084A63 Hammer Tip, Hard plastic			
084C05 Hammer Tip, Soft		084C05 Hammer Tip, Soft		084B03 Hammer Tip, Hard SS					
084C11 Hammer Trip, Very soft		084C11 Hammer Trip, Very soft		084B04 Hammer Tip, Medium					
085A10 Tip Cover		085A10 Tip Cover		084C05 Hammer Tip, Soft					
				085A10 Tip Cover					

PROPER IMPACT HAMMER USE:

Multiple hammer tips - allows tailoring of the impact pulse to frequencies of greatest interest. Increased durometer / hardness of tip provides for higher frequency content as shown in graphic to the right. Increasing the hammer speed (magnitude of impact) does not change excited frequencies and may cause adverse tip wear. Replacement tips are available but should not be required under normal use.

Single tap / double tap - Modal analysis benefits from the cleanest possible input, which is not as easy as it sounds. Practice swinging the hammer prior to data capture with the most direct impact possible and the least chance of secondary impacts (double tap). That will minimize the need for post-capture data filtering. Also note that items under test should be supported but not constrained - supports can provide damping.

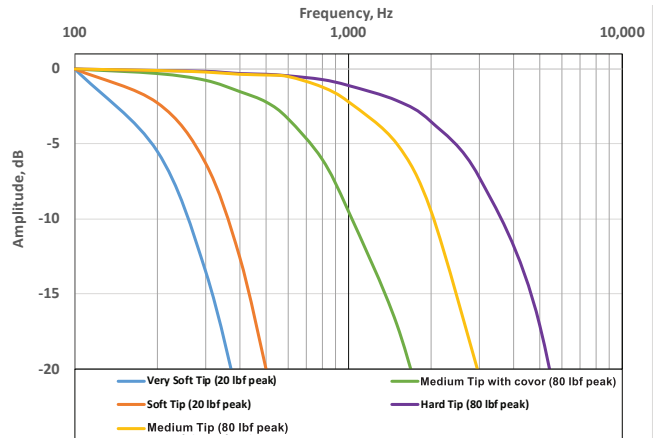

During initial setup, confirm the measurement system is functioning properly. It is good practice to avoid the upper half of the measurement range to leave room for individual impulse variation. Impulse data with flat peaks can indicate saturation of measurement chain.

MODELS 333B30 / 333B40 / 333B50 MODAL ACCELEROMETERS

SINGLE AXIS CUBE WITH 10-32 COAXIAL CONNECTOR

- Low noise minimizes error in modal analysis
- Quartz sensing element
- Stud mounting for excellent mechanical coupling, UNF & metric studs included



MODEL 485B39 PORTABLE ICP® SIGNAL CONDITIONER

DUAL CHANNEL INTERFACE FOR ICP® SENSORS TO A POWERED USB PORT

- Makes high quality measurement more accessible
- Pocket-sized, ICP® sensors to USB signal converter
- Digitized data, 24-bit analog to digital converter



MODEL 410C01 SINGLE CHANNEL ICP® SIGNAL CONDITIONER

DIN RAIL MOUNT (35MM) FOR ELECTRICAL SYSTEM ENCLOSURES

- Delivers excitation power for ICP® sensors
- Provides peak track hold and waveform analog output signals, 0 to 10 volts
- Offers AC or DC signal coupling and choice of 7 gain settings
- Setup configurable via USB or ethernet communications



3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in the USA: 800 828 8840

Phone: 1 716 684 0001 | Email: info@pcb.com

PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLine™, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.

© 2020 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLine™ is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States.

TM-FRQ-Impact-Hammers-1220



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.