



GEARBOXES


 **IMI SENSORS**
A PCB DIVISION

pcb.com/imi-sensors | 1 800 959 4464

GEARBOXES

The sensor has to be chosen based on calculated gear mesh frequency and bearing defect frequencies. The gear mesh frequency is easily determined by multiplying the number of teeth on a gear by the rotational frequency. For example, a motor with 1800 rpm (30 Hz) and a gear with 50 teeth results in a gear mesh frequency of 1500 Hz. This result multiplied by a factor of 3.25 will provide the maximum frequency the sensor should be able to measure for best results. If the number of teeth on a gear is unknown, as a rule of thumb, the maximum sensor frequency should be assumed to be 200 times rpm (in Hz). Typically high speed input and low speed output frequencies need to be measured near shaft bearings. Sensors should not be mounted on resonance frequency prone housing locations to improve accuracy of the readings. Sensors can be placed in radial, ideally two sensors with a 90 degree angle and axial locations. Radial sensors can be used to spot imbalance and axial sensors will best analyze gear mesh and bearing faults.

Most IMI® sensors can be offered with an option to safely affix them inside of the gear housing for best measurement results. Sensors can be pressure tested, can withstand oils and chemicals inside of the case and are available in high temperature versions. Advanced vibration monitoring systems in combination with experienced analysis can deliver a broad range of results. Tooth wear, gear eccentricity & misalignment, damaged teeth and other potential problems can be spotted instantly while the transmission is in service.

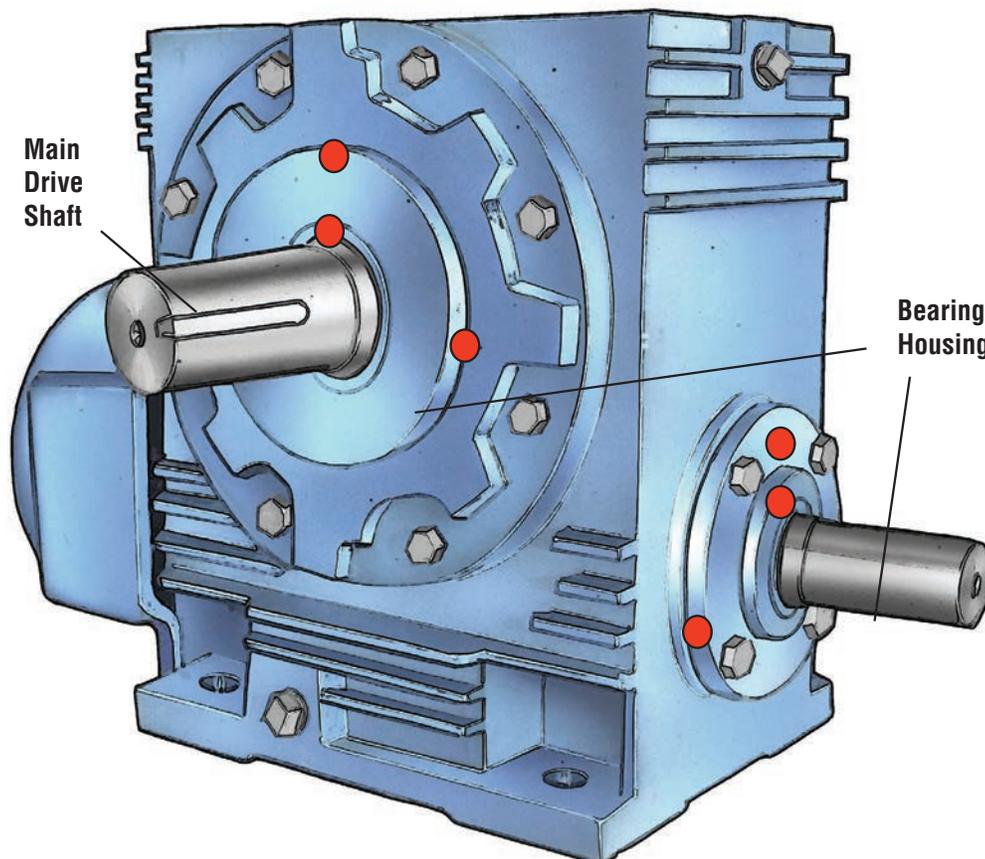

FOR REDUCER / SLOW SPEED GEARS



CE



PRECISION ICP® ACCELEROMETER

MODEL 625B01

- Side exit, ring-style
- Ceramic sensing element
- 100 mV/ips integrated velocity output option available

CE



PRECISION ICP® ACCELEROMETER

MODEL 626B01

- High sensitivity
- Low frequency response starting at 0.2 Hz
- Full frequency sweep calibration with 5% sensitivity deviation tolerance

FOR HIGH SPEED GEARS & GEAR MESH FAILURES

CE



LOW COST ICP® ACCELEROMETER

MODEL 603C00

- 10 mV/g sensitivity
- 500 g measurement range
- Small footprint
- Intrinsically safe options available



CE



LOW COST ICP® ACCELEROMETER

MODELS 607A11 and 608A11

- Unique 360° swivel design
- Allows for easy cable orientation
- Intrinsically safe options available



CE



PRECISION ICP® ACCELEROMETER

MODEL 622B01

- Full frequency sweep calibration with 5% sensitivity deviation tolerance
- 15 kHz high frequency response ideal for early detection of bearing faults
- Intrinsically safe options available


CE



HIGH FREQUENCY ICP® ACCELEROMETER

MODEL 621C40

- High frequency response to 30 kHz, even when mounted magnetically
- Intrinsically safe option available
- Available as kit (model 600A12A) with 5ft cable & magnet

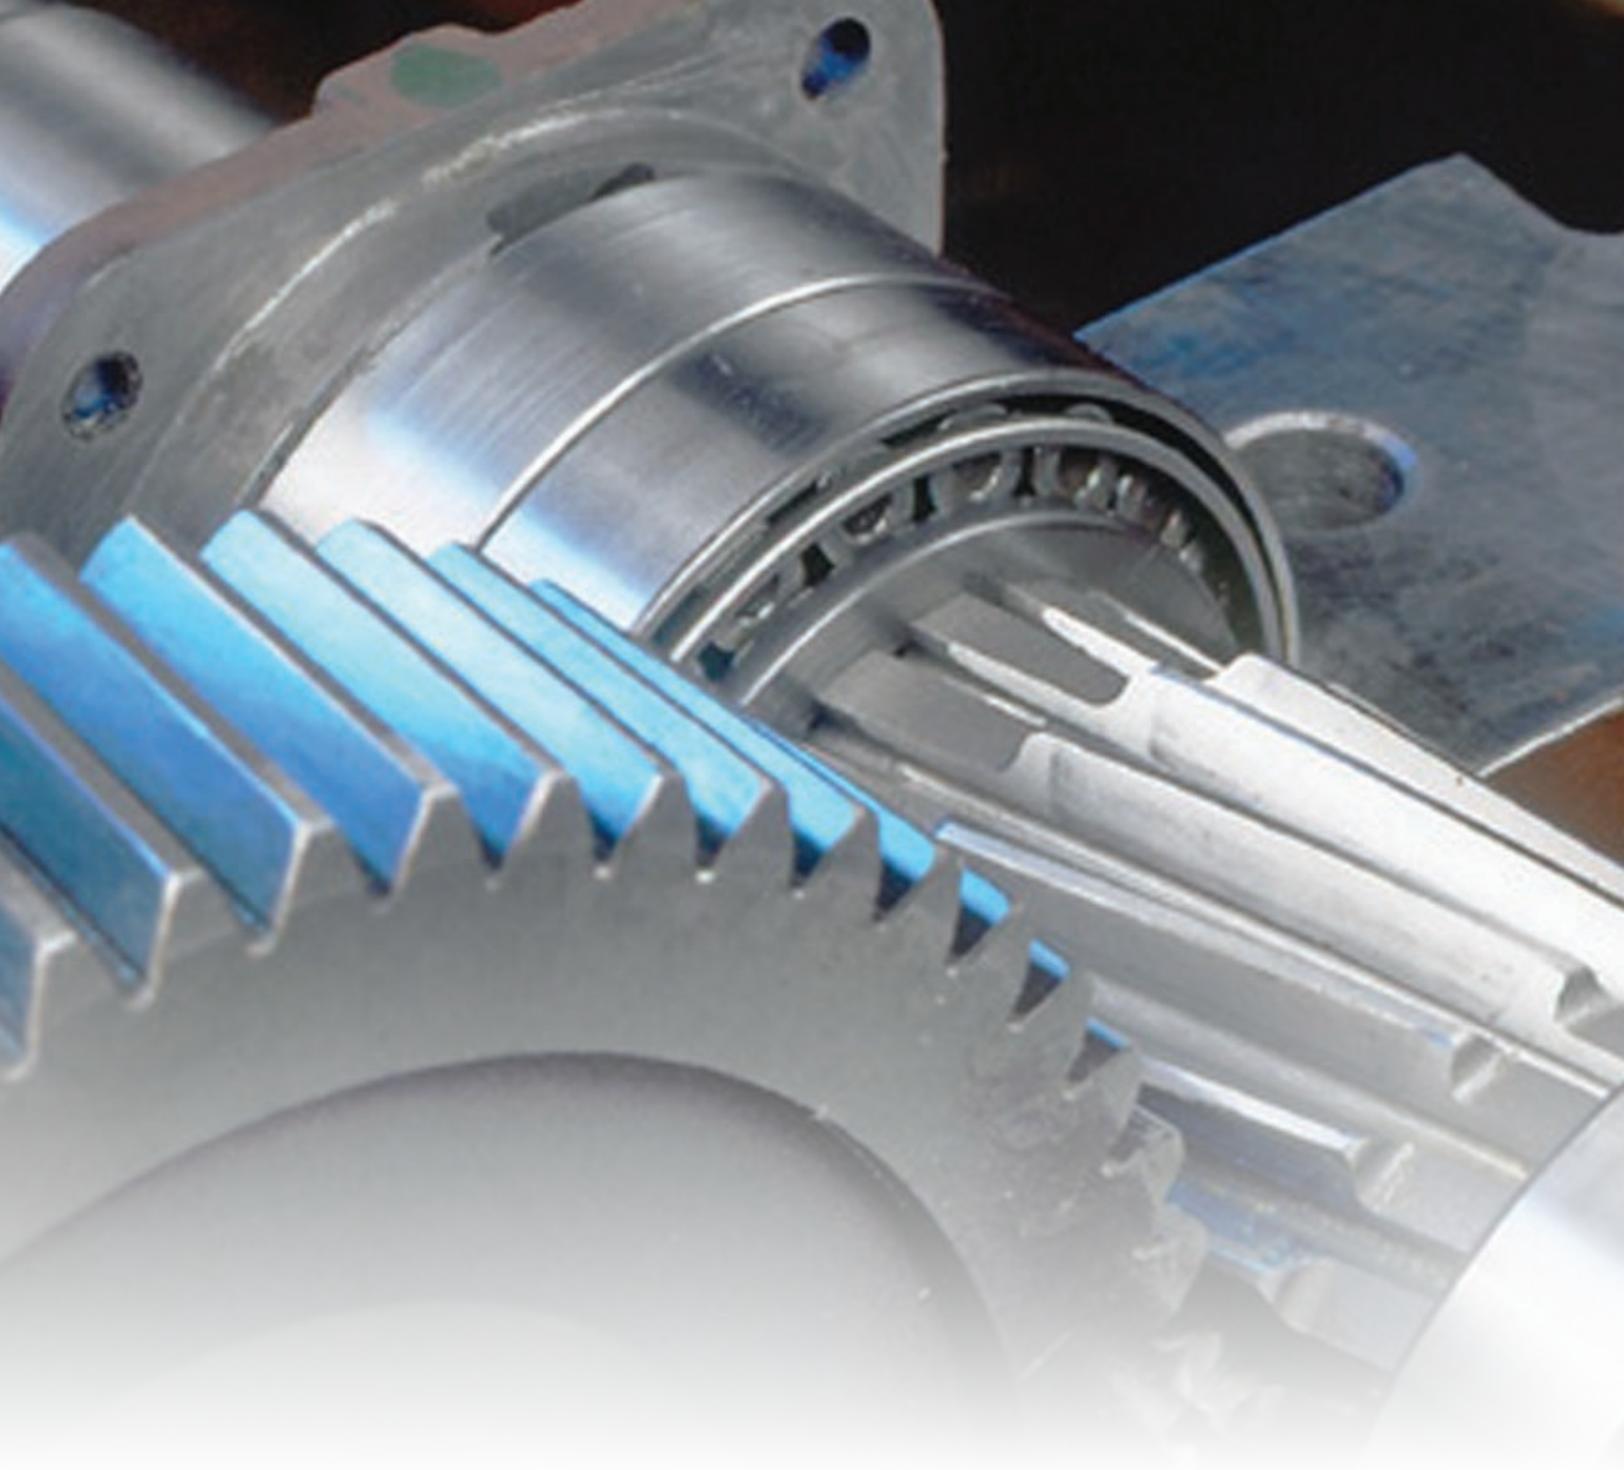

3425 Walden Avenue, Depew, NY 14043 USA

pcb.com/imi-sensors | imi@pcb.com | 800 959 4464 | +1 716 684 0003

© 2023 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevo is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevo), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at www.pcb.com/trademarkownership.

IMI-APP-Gearboxes-0823