



DYNAMIC PRESSURE SENSORS FOR HIGH FREQUENCY MEASUREMENTS



DYNAMIC PRESSURE SENSORS FOR HIGH FREQUENCY MEASUREMENTS

EXTREMELY FAST, MICRO-SECOND RESPONSE WITH WIDE AMPLITUDE & FREQUENCY RANGE

Series 113B and 102B high frequency dynamic pressure sensors are structured with naturally piezoelectric, stable quartz sensing elements that are well-suited to measure rapidly-changing pressure over wide amplitude and frequency ranges. They feature micro-second response times and high resonant frequency. Solid-state construction, acceleration compensation, hermetically-sealed housings, and laser-welded flush diaphragms provide undistorted high frequency response and durability in adverse environmental conditions. ICP[®] technology provides a high signal-to-noise ratio and high-level voltage output, capable of driving long cables to a safe zone for data acquisition. Charge output sensors are also available for applications requiring continuous high operating temperatures. Piezoelectric sensors are more stable, robust, and use less costly signal conditioning than comparable piezoresistive types for dynamic pressure measurements.


APPLICATIONS

- Shock tubes and closed bombs
- Time-of-arrival measurements
- Explosion, blast, and shock wave

HIGHLIGHTS

- Ultra-high frequency > 500 kHz
- Fast rise time < 1 μ sec
- Peak pressure and total impulse



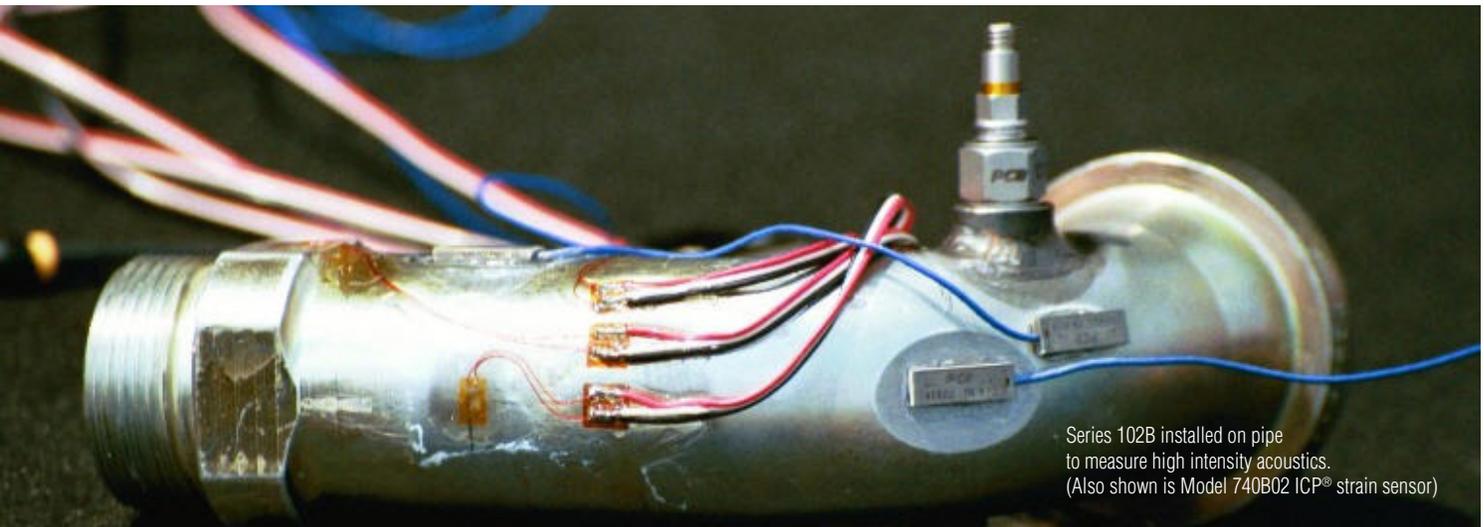

Series 102B installed on pipe to measure high intensity acoustics. (Also shown is Model 740B02 ICP® strain sensor)

Typical applications include pulsations, hydraulic and pneumatic pressure fluctuations (e.g. compressors), fluid-borne noise detection, cavitation, high intensity acoustics, closed bomb combustion studies, explosive component performance (e.g. detonators, explosive bolts) and airbag testing. A popular application includes measurement of free field, enclosed, and directed (shock tube) air blast resulting from explosions or muzzle blast. Air blast over pressure and reflected pressure measurements can be measured to determine peak pressure, and total impulse of the structural loading imparted on any unit under test (e.g., building, ground transport vehicle, surface or underwater vehicle).

Series 113B and 102B pressure sensors are available with ranges to 15 kpsi (103 MPa) and sensitivities to 100 mV/psi (14.5 mV/kPa). Each sensor is supplied with NIST-traceable, A2LA accredited dynamic calibration to ISO17025. They are 100% in-process tested for resonant frequency, rise time, and acceleration compensation before shipment to the customer.

As with all PCB® instrumentation, these sensors are complemented with toll-free applications assistance, 24-hour customer service, and is backed by a no-risk policy that guarantees satisfaction or your money refunded.

CE



HIGH FREQUENCY PRESSURE SENSOR

MODEL 113B

CE



HIGH FREQUENCY PRESSURE SENSOR

MODEL 102B

CE



HIGH FREQUENCY PRESSURE SENSOR

SERIES CA102B

Ablative coating option 'CA' available for flash protection

ADDITIONAL SENSORS FOR HIGH FREQUENCY PRESSURE MEASUREMENTS

CE



ICP® FREE-FIELD BLAST PENCIL PROBES

SERIES 137

- Ranges from 50 to 5000 psi (344 to 34475 kPa)
- Rise time <4 μ sec
- Resonant frequency >500 kHz

CE



ICP® UNDERWATER BLAST EXPLOSION PRESSURE PROBES

SERIES 138

- Ranges from 1000 to 50k psi (6894 to 344740 kPa)
- Rise time <1.5 μ sec
- Resonant frequency >1 MHz



SHOCK WAVE TIME-OF-ARRIVAL ICP® MICROSENSORS

SERIES 132

- 50 psi (344 kPa) range
- Rise time <3 μ sec
- Resonant frequency >1 MHz
- 0.124" (3.15 mm) diameter diaphragm

CE



TOURMALINE PRESSURE BAR

SERIES 134

- Designed for reflected shock wave pressure measurement
- Unique non-resonating design, tourmaline sensing element
- Pressure ranges from 1000 to 20k psi (6894 to 137900 kPa)
- Rise time \leq 0.2 μ sec

MOUNTING ADAPTERS



MOUNTING ADAPTOR

SERIES 061A / 062A

- 061A01: 3/8-24
- 061A10: M10
- 062A01: 1/8-NPT



MOUNTING ADAPTOR

MODEL 061A59

- 3/8-24 Delrin, Ground Isolated



WATER-COOLED ADAPTOR

MODEL 064B02

- Flush Mount

RECOMMENDED SIGNAL CONDITIONERS

CE



SIGNAL CONDITIONER

MODEL 482A21

- Single & 4-channel versions
- Unity gain, low-noise, AC and DC powerable
- 1 MHz response

CE

TEDS
RESISTANCE
COMPATIBLE



SIGNAL CONDITIONER

SERIES 482C & 483C

- AC-powered, 4- & 8-channel versions
- Variety of gain & filtering configurations
- Can operate with charge output sensors
- 1 MHz response (482C05 and 483C05 models only)

CE

TEDS
RESISTANCE
COMPATIBLE



SIGNAL CONDITIONER

SERIES 481A

- AC-powered, 16-channel
- Many configuration options
- Can operate with charge output sensors
- Daisy-link multiple racks for up to 256 channels
- 1 MHz response (481A20 model only)

SPECIFICATIONS

DYNAMIC PRESSURE SENSORS FOR HIGH FREQUENCY								
Model Number	113B28	113B27	113B21	113B26	113B24	113B22	113B23	113B03
Measurement Range (+/- 5 Volt Output)	50 psi 345 kPa	100 psi 690 kPa	200 psi 1380kPa	500 psi 3450 kPa	1 kpsi 6895 kPa	5 kpsi 34475 kPa	10 kpsi 68950 kPa	15 kpsi 103420 kPa
Useful Overrange (+/- 10 Volt Output)	100 psi [1] 690 kPa [1]	200 psi [1] 1380 kPa [1]	400 psi [1] 2758 kPa [1]	1 kpsi [1] 6895 kPa [1]	2 kpsi [1] 13790 kPa [1]	10 kpsi [1] 68950 kPa [1]	—	—
Sensitivity	100 mV/psi 14.5 mV/kPa	50 mV/psi 7.25 mV/kPa	25 mV/psi 3.6 mV/kPa	10 mV/psi 1.45 mV/kPa	5 mV/psi 0.725 mV/kPa	1 mV/psi 0.145 mV/psi	0.5 mV/psi 0.073 mV/kPa	0.44 pC/psi 0.064 pC/kPa
Maximum Pressure	1 kpsi 6895 kPa	1 kpsi 6895 kPa	1 kpsi 6895 kPa	10 kpsi 68950 kPa	10 kpsi 68950 kPa	15 kpsi 103420 kPa	15 kpsi 103420 kPa	15 kpsi 103420 kPa
Resolution	0.5 mpsi 0.0034 kPa	1 mpsi 0.007 kPa	1 mpsi 0.007 kPa	2 mpsi 0.014 kPa	20 mpsi 0.138 kPa	20 mpsi 0.138 kPa	40 mpsi 0.28 kPa	10 mpsi [3] 0.07 kPa [3]
Resonant Frequency	≥ 500k Hz							
Rise Time (Reflected)	≤ 1 μsec							
Low Frequency Response (-5 %)	0.5 Hz	0.5 Hz	0.5 Hz	0.01 Hz	0.005 Hz	0.001 Hz	0.0005 Hz	—
Non-linearity	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]
Acceleration Sensitivity	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s ²)							
Temperature Range	-100 to +275 °F -73 to +135 °C	-100 to +400 °F -240 to +204 °C						
Discharge Time Constant (at room temp)	≥ 1 sec	≥ 1 sec	≥ 1 sec	≥ 50 sec	≥ 100 sec	≥ 500 sec	≥ 1000 sec	—
Electrical Connector	10-32 jack							
Housing Material	17-4 Stainless							
Diaphragm Material	Invar							
Sealing	Welded Hermetic							
ADDITIONAL VERSIONS								
All Invar Material	113B38	113B37	113B31	113B36	113B34	113B32	113B33	—
Stainless Steel Diaphragm	S113B28	S113B27	S113B21	S113B26	S113B24	S113B22	S113B23	—
SUPPLIED ACCESSORIES								
Seal Rings: (3) 065A02 brass, 0.015 in. thick, (1) 065A05 stainless steel, 0.240 in. thick.								
Clamp Nuts: (1) 060A03 English 5/16-24 thread, (1) 060A05 metric M7 thread								
NOTES								
[1] For +10 volt output, minimum 24 VDC supply voltage required. Negative 10 volt output may be limited by output bias.								
[2] Zero-based, least-squares, straight line method.								
[3] Resolution dependent on signal conditioning and cable length used in charge system.								

GROUND ISOLATED, DYNAMIC PRESSURE SENSORS FOR HIGH FREQUENCY

Model Number	102B18	102B16	102B15	102B06	102B04	102B	102B03
Measurement Range (+/- 5 Volt Output)	50 psi 345 kPa	100 psi 690 kPa	200 psi 1380 kPa	500 psi 3450 kPa	1 kpsi 6895 kPa	5 kpsi 34475 kPa	10 kpsi 68950 kPa
Useful Overrange (+/- 10 Volt Output)	100 psi [1] 690 kPa [1]	200 psi [1] 1380 kPa [1]	400 psi [1] 2758 kPa [1]	1 kpsi [1] 6895 kPa [1]	2 kpsi [1] 13790 kPa [1]	10 kpsi [1] 68950 kPa [1]	—
Sensitivity	100 mV/psi 14.5 mV/kPa	50 mV/psi 7.25 mV/kPa	25 mV/psi 3.6 mV/kPa	10 mV/psi 1.45 mV/kPa	5 mV/psi 0.725 mV/kPa	1 mV/psi 0.145 mV/psi	0.5 mV/psi 0.073 mV/kPa
Maximum Pressure	1 kpsi 6895 kPa	1 kpsi 6895 kPa	1 kpsi 6895 kPa	10 kpsi 68950 kPa	10 kpsi 68950 kPa	15 kpsi 103420 kPa	15 kpsi 103420 kPa
Resolution	0.5 mpsi 0.0034 kPa	1 mpsi 0.007 kPa	1 mpsi 0.007 kPa	2 mpsi 0.014 kPa	20 mpsi 0.138 kPa	20 mpsi 0.138 kPa	40 mpsi 0.28 kPa
Resonant Frequency	≥ 500k Hz						
Rise Time (Reflected)	≤ 1 μsec						
Low Frequency Response (-5 %)	0.5 Hz	0.5 Hz	0.5 Hz	0.01 Hz	0.005 Hz	0.001 Hz	0.0005 Hz
Non-linearity	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]	≤ 1 % [2]
Acceleration Sensitivity	≤ 0.002 psi/g ≤ 0.0014 kPa/(m/s ²)						
Temperature Range	-100 to +275 °F -73 to +135 °C						
Discharge Time Constant (at room temp)	≥ 1 sec	≥ 1 sec	≥ 1 sec	≥ 50 sec	≥ 100 sec	≥ 500 sec	≥ 1000 sec
Electrical Connector	10-32 jack						
Housing Material	17-4 Stainless						
Diaphragm Material	Invar						
Sealing	Welded Hermetic						
ADDITIONAL VERSIONS							
Metric Mounting Thread	M102B18	M102B16	M102B15	M102B06	M102B04	M102B	M102B03
SUPPLIED ACCESSORIES							
Seal Rings: (3) 065A03 brass 0.030 in. thick.							
NOTES							
[1] For +10 volt output, minimum 24 VDC supply voltage required. Negative 10 volt output may be limited by output bias.							
[2] Zero-based, least-squares, straight line method.							



 **PCB PIEZOTRONICS**
AN AMPHENOL COMPANY

3425 Walden Avenue, Depew, NY 14043 USA

pcb.com | info@pcb.com | 800 828 8840 | +1 716 684 0001

© 2024 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at www.pcb.com/trademarkownership.

TM-PRS-113B-102B-0124