


1328

APPLICATION		
NEXT ASS'Y	USED ON	VAR

REVISIONS				
REV	DESCRIPTION	ECN	DATE	APP'D

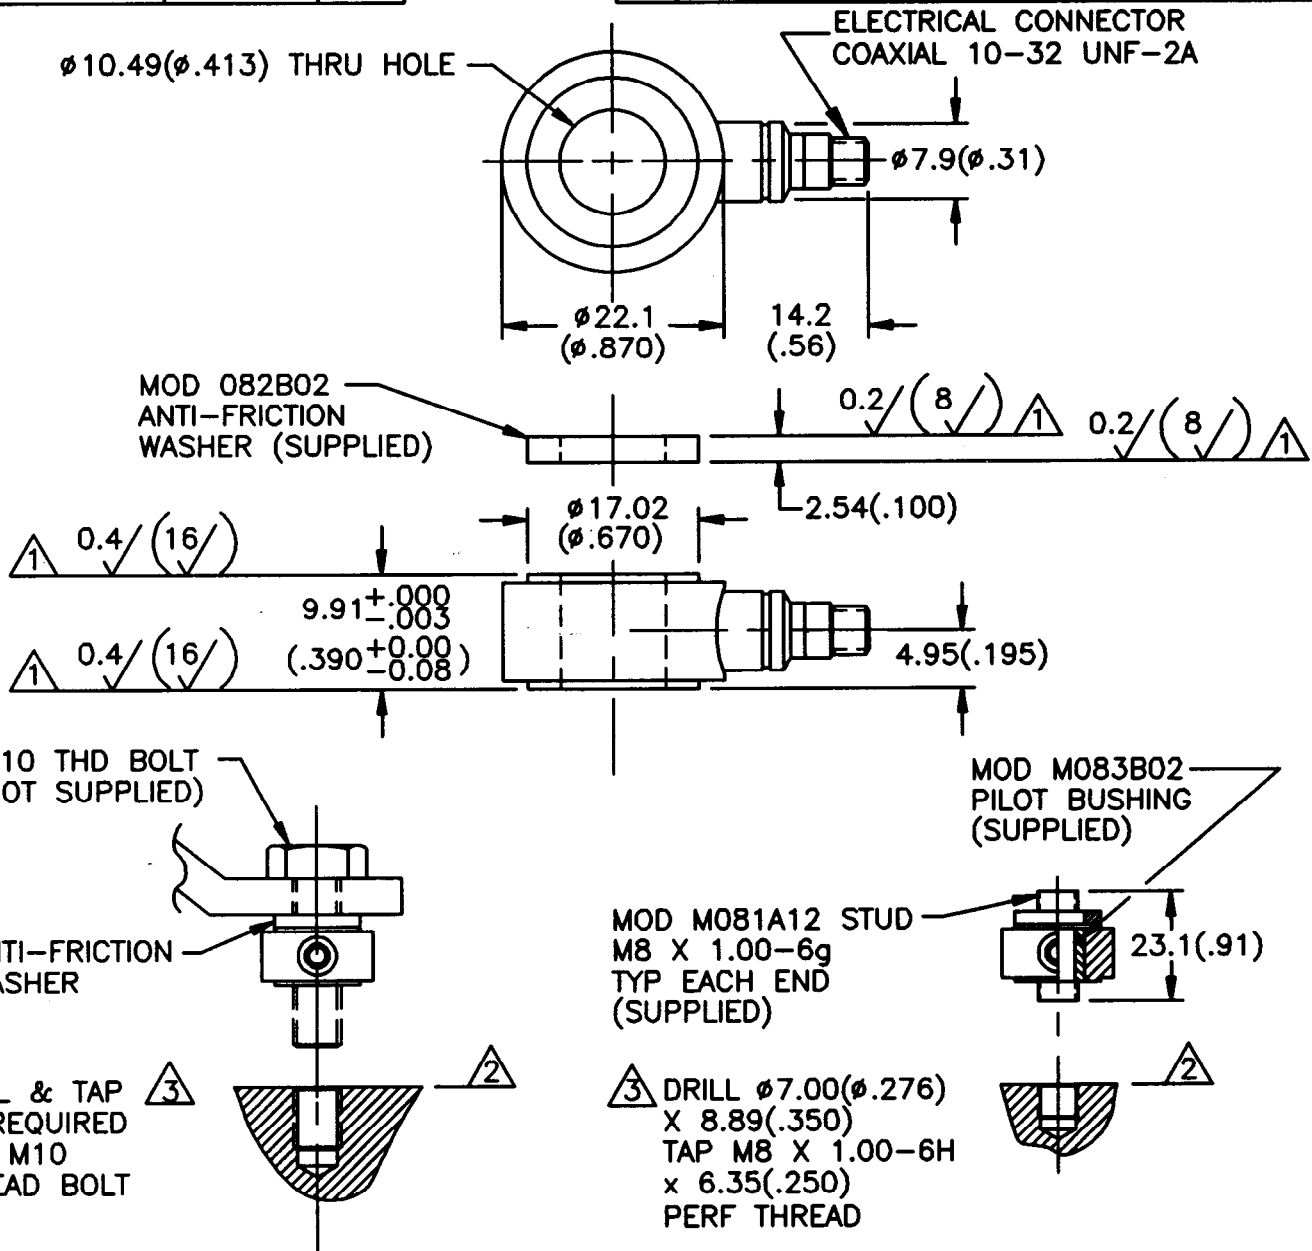

4.) SEE MANUAL FOR PRELOAD INSTRUCTIONS.

③ DRILL PERPENDICULAR TO MOUNTING SURFACE WITHIN ±1°.

② MOUNTING SURFACE UNDER FORCE RING MUST BE FLAT WITHIN 0.03(.001) WITH AT LEAST 3.2/(125) FINISH.

① THESE SURFACES FLAT AND PARALLEL TO WITHIN 0.03(.001) TIR.

UNLESS SPECIFIED TOLERANCES		DRAWN	<i>xab</i>	6/10/94	MFG	<i>S.L.</i>	6/10/94	<b>PCB</b> PIEZOTRONICS, INC. 3425 WALDEN AVE. DEER PARK, NEW YORK 14043 PHONE: (716) 884-0301	
DIMENSIONS IN INCHES (IN PARENTHESES)	DIMENSIONS IN MILLIMETERS	CHK'D	<i>Kane</i>	6/10/94	ENGR	<i>CE</i>	6/10/94		
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ±0.3 XX ±0.13	APP'D	<i>JS</i>	6/10/94	Sales	<i>SBC</i>	6/10/94		
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES	TITLE	INSTALLATION DRAWING MODEL M202B FORCE RING				CODE IDENT. NO. 52681		DWG. NO. 1328
FILLETS AND RADII 0.07 - 0.13 (.003 - .005)		SCALE: 1.33=1					SHEET 1 OF 1		