


1330

APPLICATION		
NEXT ASSY	USED ON	VAR

REVISIONS				
REV	DESCRIPTION	ECN	DATE	APP'D

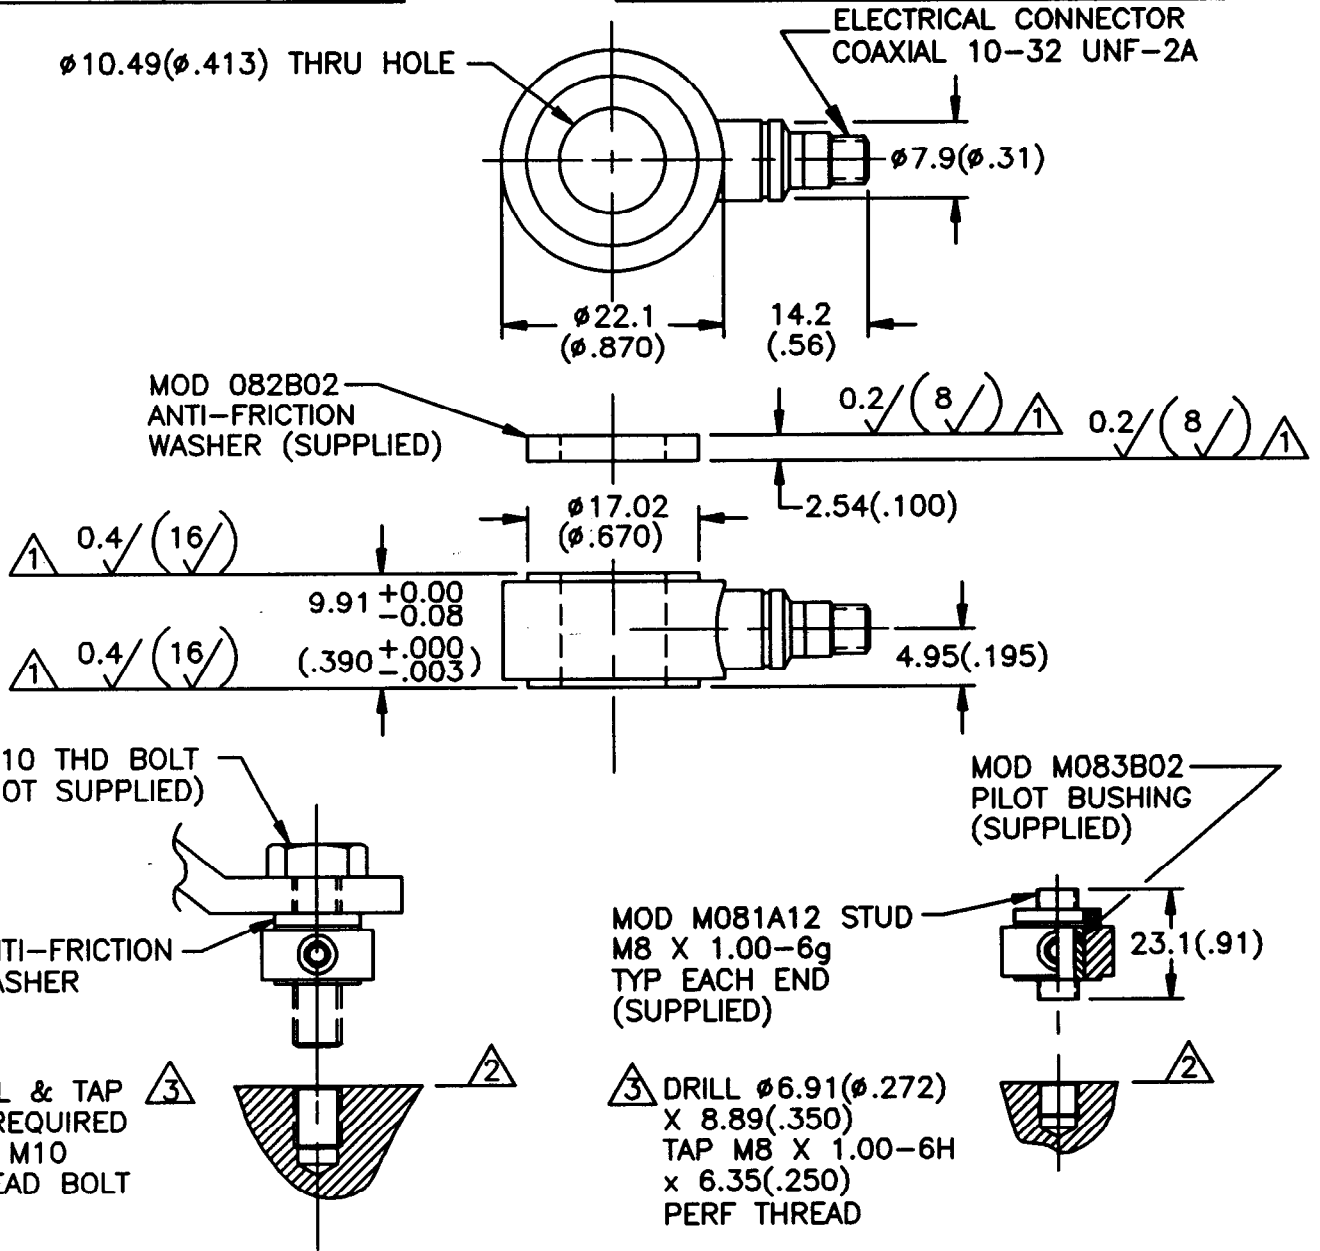

- 4.) SEE MANUAL FOR PRELOAD INSTRUCTIONS.
- ⊠ DRILL PERPENDICULAR TO MOUNTING SURFACE WITHIN ±1°.
- ⊡ MOUNTING SURFACE UNDER FORCE RING MUST BE FLAT WITHIN 0.03(.001) WITH AT LEAST 3.2/(125) FINISH.
- ⊠ THESE SURFACES FLAT AND PARALLEL TO WITHIN 0.03(.001) TIR.

UNLESS SPECIFIED TOLERANCES		DRAWN	ZAB	6/10/94	MFG	D.L.	6/10/94	PCB PIEZOTRONICS, INC. 3425 WALDEN AVE. DEPEW, NEW YORK 14043 PHONE: (716) 864-0001	
DIMENSIONS IN INCHES (IN PARENTHESES)	DIMENSIONS IN MILLIMETERS	CHK'D	KenL.	6/10/94	ENGR	SL	6/10/94		
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ±0.3 XX ±0.13	APP'D	SL	6/10/94	SL	SL	6/10/94		
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES	TITLE	INSTALLATION DRAWING MODEL M212B FORCE RING				CODE IDENT. NO. 52681		
FILLETS AND RADII 0.07 - 0.13 (.003 - .005)		SCALE: 1.33=1						DWG. NO. 1330	SHEET 1 OF 1