



PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

| REVISIONS |                                 |       |
|-----------|---------------------------------|-------|
| REV       | DESCRIPTION                     | DIN   |
| C         | UPDATE DRAWING AND FIELD NOTE 3 | 35651 |

1519

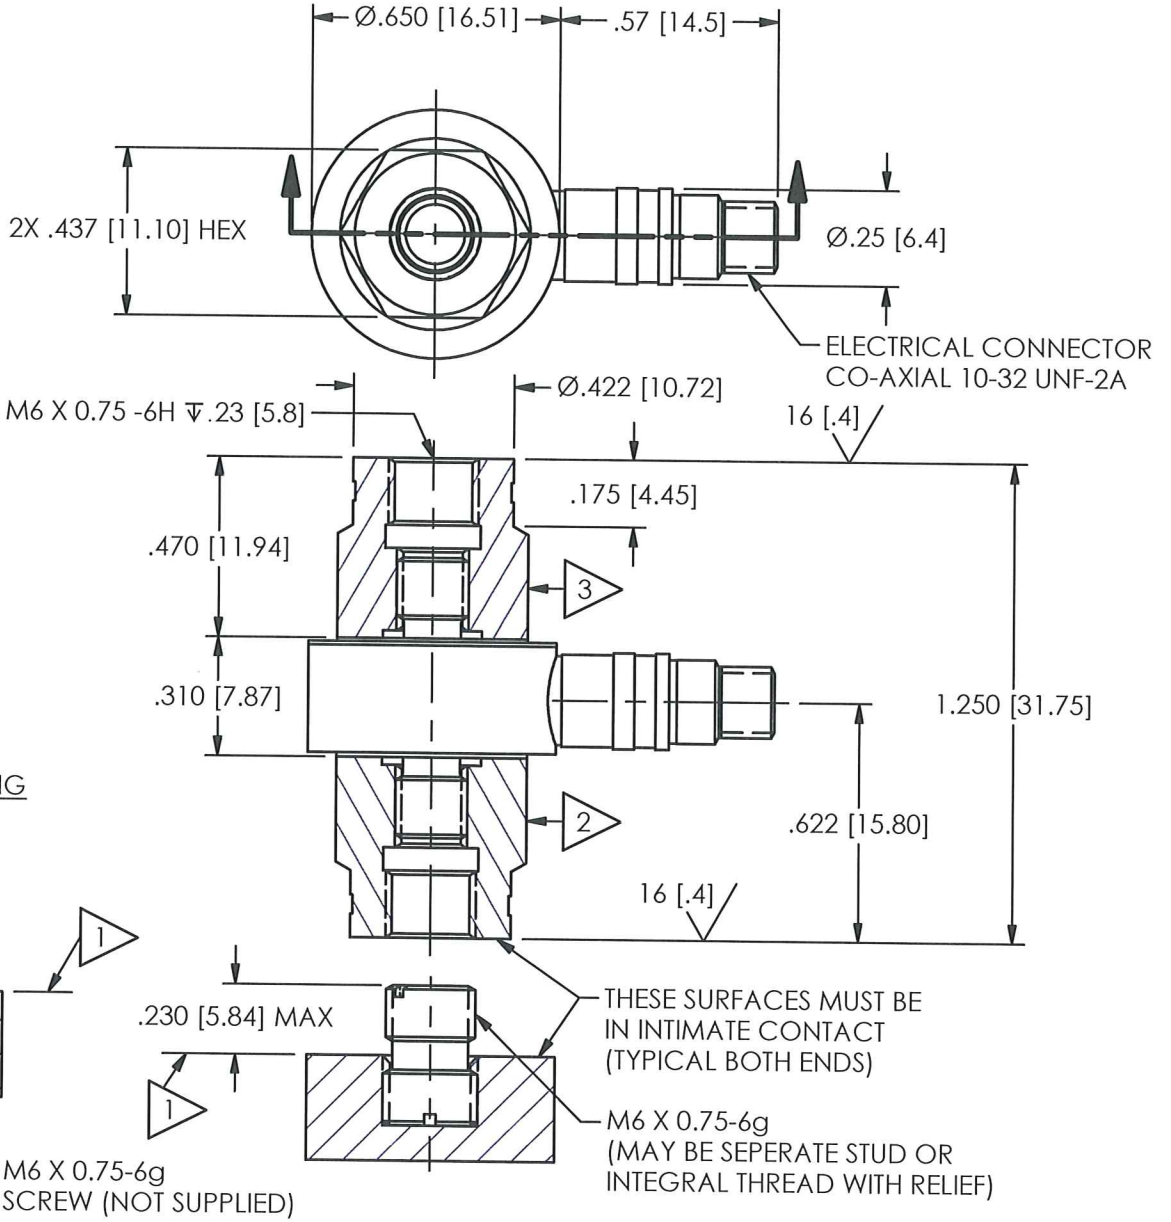

ALTERNATE MOUNTING

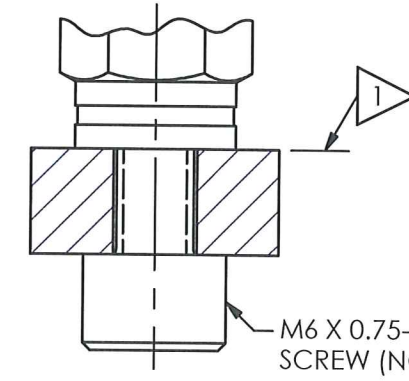

THESE SURFACES MUST BE IN INTIMATE CONTACT (TYPICAL BOTH ENDS)

M6 X 0.75-6g (MAY BE SEPERATE STUD OR INTEGRAL THREAD WITH RELIEF)

5.) COMPRESSIVE FORCE RESULTS IN POSITIVE GOING OUTPUT VOLTAGE.

4.) EPOXY OR LOCTITE MAY BE USED ON THREADS TO LOCK FORCE LINK IN PLACE.

3) DO NOT APPLY TORQUE ON UPPER HEX TO MOUNT SENSOR.

2) RECOMMENDED MOUNTING TORQUE ON .437 [11.10] HEX 2-5 FT LBS [3-7 NEWTON METERS].

1) MOUNTING SURFACE MUST BE FLAT TO WITHIN .001 [.03] TIR WITH A MIN 32 [.8] MICROFINISH.

| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: |   | DRAWN   | CHECKED | ENGINEER              |               | <br>3425 WALDEN AVE. DEPEW, NY 14043<br>(716) 684-0001 E-MAIL: sales@pcb.com |
|--|---|---|---------|-----------------------|---------------|--|
| DIMENSIONS IN INCHES                       | DIMENSIONS IN MILLIMETERS [IN BRACKETS] | mDF   | 5/16/11 | NJL                   | 5/16/11       |  |
| DECIMALS XX ±.01<br>XXX ±.005              | DECIMALS X ±0.3<br>XX ±0.13             | TITLE   |         | CODE IDENT. NO. 52681 | DWG. NO. 1519 |  |
| ANGLES ± 2 DEGREES                         | ANGLES ± 2 DEGREES                      | INSTALLATION DRAWING<br>MODEL M221B01, B02, B03, B04, B05<br>HERMETIC SEALED ICP FORCE LINK |         |                       |               | SCALE: 2X  |
| FILLETS AND RADII .003 - .005              | FILLETS AND RADII 0.07 - 0.13           |   |         |                       |               | SHEET 1 OF 1   |