



APPLICATION			REVISIONS				
NEXT ASS'Y	USED ON	VAR	REV	DESCRIPTION	ECN	DATE	APP'D
			A	REVISED PER ECN	8438	11/18/97	<i>[Signature]</i>

5778

PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither it nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

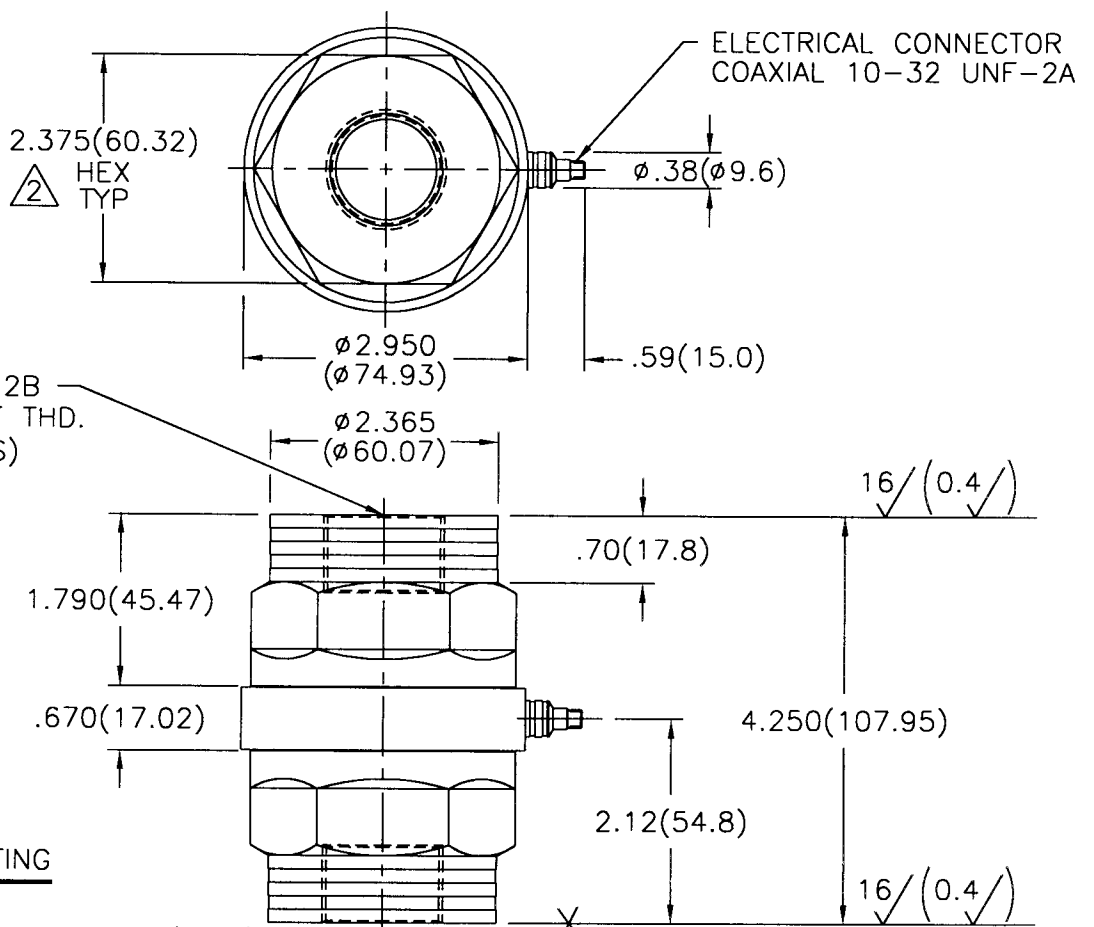

**ALTERNATE MOUNTING**

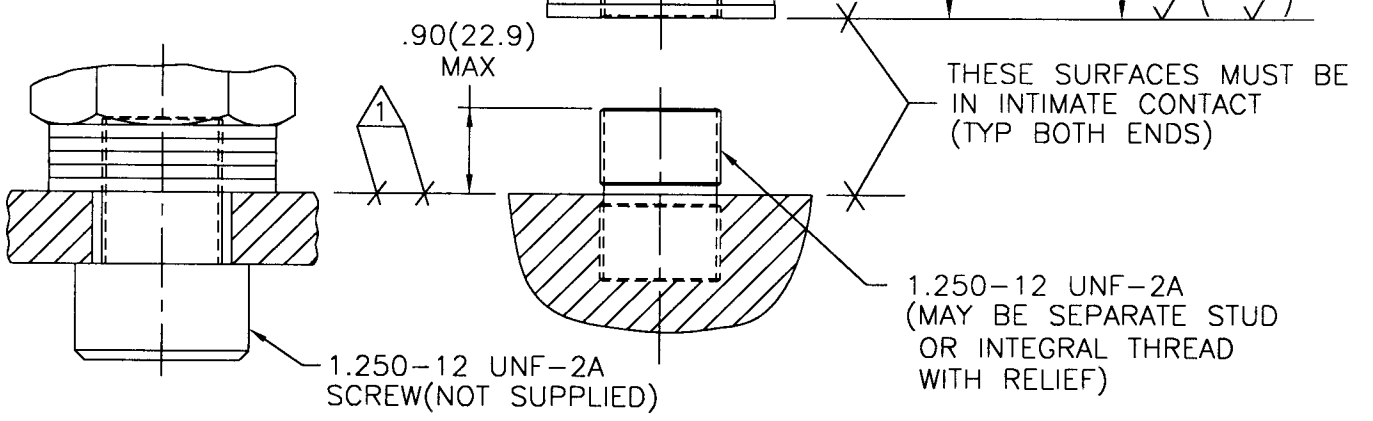

- 4.) COMPRESSIVE FORCE RESULTS IN POSITIVE GOING OUTPUT VOLTAGE.
- 3.) EPOXY OR LOCTITE MAY BE USED ON THREADS TO LOCK FORCE LINK IN PLACE.
- ② RECOMMENDED MOUNTING TORQUE ON 2.375(60.32) HEX 10-15 FOOT POUNDS (14-20 NEWTON METERS).
- ① MOUNTING SURFACES MUST BE FLAT TO WITHIN .001(0.03) TIR WITH A MIN 63/(1.6) FIN.

UNLESS SPECIFIED TOLERANCES		DRAWN	MFG	PCB PIEZOTRONICS, INC.	
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS (IN PARENTHESIS)	CHK'D	ENGR	3425 WALDEN AVE. DEPEW, NEW YORK 14043	
DECIMALS XX ± .01	DECIMALS XX ± 0.3	APP'D	TITLE	PHONE: (716) 684-0001	
XXX ± .005	XXX ± 0.13		INSTALLATION DRAWING	CODE	DWG. NO.
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES		MODEL 227C	52681	5778
FILLET AND RADII .003 - .005	FILLET AND RADII (0.07 - 0.13)	HERMETIC SEALED ICP FORCE LINK		SCALE: 1=2 SHEET 1 OF 1	
DD011 REV. A 05/26/95					