


PCB Load & Torque (A Division of PCB Piezotronics, Inc.)
 claims proprietary rights in the information disclosed hereon.
 Neither it nor any reproduction thereof will be disclosed to
 others without the written consent of PCB Load and Torque.

68765

REVISIONS


REV	DESCRIPTION	ECO
NR	RELEASED FOR PRODUCTION - 01.30.18, PTE	47803

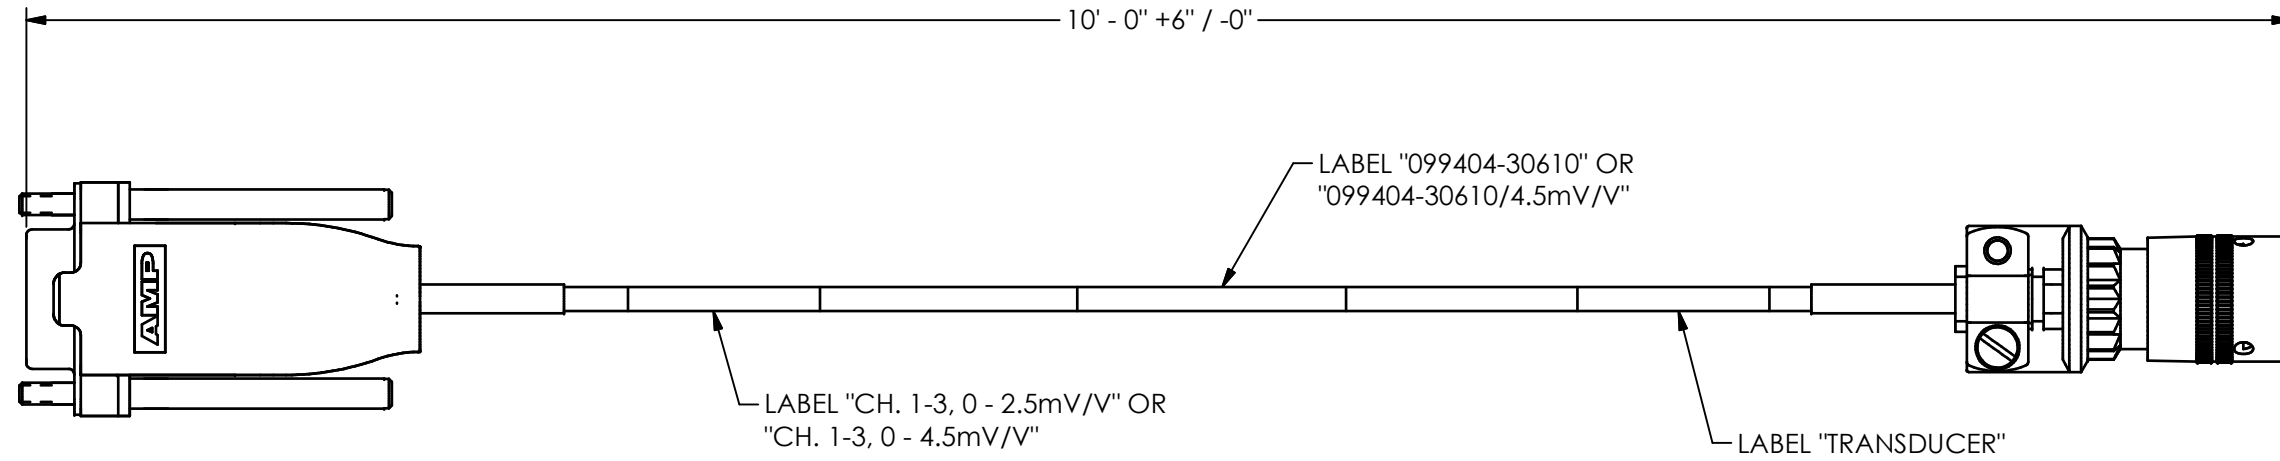

DB15P CONNECTOR
 099404-30610/4.5MV/V
 WIRING CODE:
 PIN 1 -SIG.
 PIN 2 +SIG.
 PIN 4 GS1
 PIN 5 SHIELD
 PIN 9 +EXC.
 PIN 10 -EXC.
 PIN 12 GS0

DB15P CONNECTOR
 099404-30610
 WIRING CODE:
 PIN 1 -SIG.
 PIN 2 +SIG.
 PIN 3 GS1
 PIN 5 SHIELD
 PIN 9 +EXC.
 PIN 10 -EXC.
 PIN 12 GS0

PUSH/TURN CONNECTOR
 (BENDIX PT06A-8-4S OR EQUIV.)
 WIRING CODE:
 PIN A +EXC.
 PIN B -EXC.
 PIN C +SIG.
 PIN D -SIG.

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER		 PCB LOAD & TORQUE <small>A PCB GROUP COMPANY</small> 24350 Indoplex Circle, Farmington Hills, MI 48335 (248) 888-8260 E-MAIL: liinfo@pcb.com
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	PTE	01.29.18	JSD	01.29.18	PTE	01.29.18	
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ± 0.3 XX ± 0.13	TITLE OUTLINE DRAWING M9404 CH 1 - 3 2.5mV/V AND 4.5mV/V						
ANGLES ± .5 DEGREES	ANGLES ± .5 DEGREES							
FILLETS AND RADII .015 MAX	FILLETS AND RADII 0.38 MAX	DWG. NO. <h1 style="margin: 0;">68765</h1>						
		SCALE: NONE		SHEET 1 OF 1				