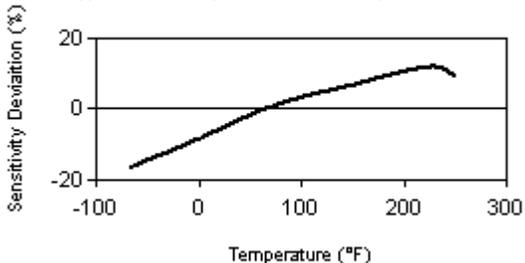


Model Number <b>607A60</b>	<b>SPINDLER® INDUSTRIAL ICP® ACCELEROMETER</b>		Revision: NR ECN #: 42884										
<b>Performance</b> Sensitivity(± 15 %) Measurement Range Frequency Range(± 3 dB) Resonant Frequency Broadband Resolution(1 to 10,000 Hz) Non-Linearity Transverse Sensitivity	<b>ENGLISH</b> 10 mV/g ± 500 g 30 to 600,000 cpm 1500 kcpm 350 µg ± 1 % ≤ 7 %	<b>SI</b> 1.02 mV/(m/s <sup>2</sup> ) ± 4905 m/s <sup>2</sup> 0.5 to 10,000 Hz 25 kHz 3434 µm/sec <sup>2</sup> ± 1 % ≤ 7 %	<b>OPTIONAL VERSIONS</b> Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.  <b>M</b> - Metric Mount  <b>TO</b> - Temperature Output Temperature Output Range                    +36 to +250 °F                    +2 to +121 °C Temperature Scale Factor                    5.56 mV/°F + 32                    +10 mV/°C Electrical Connector                    Integral Armored Cable                    Integral Armored Cable Electrical Connections(Red)                    Acceleration Output                    Acceleration Output Electrical Connections(Black)                    Ground                    Ground Electrical Connections(White)                    Temperature Output                    Temperature Output										
<b>Environmental</b> Overload Limit(Shock) Temperature Range Temperature Response Enclosure Rating	5000 g pk -65 to +250 °F See Graph IP67	49,050 m/s <sup>2</sup> pk -54 to +121 °C See Graph IP67											
<b>Electrical</b> Settling Time(within 1% of bias) Discharge Time Constant Excitation Voltage Constant Current Excitation Output Impedance Output Bias Voltage Spectral Noise(10 Hz) Spectral Noise(100 Hz) Spectral Noise(1 kHz) Electrical Isolation(Case)	≤ 2 sec ≥ 0.3 sec 18 to 28 VDC 2 to 20 mA <150 Ohm 8 to 12 VDC 8 µg/√Hz 5 µg/√Hz 4 µg/√Hz >10 <sup>8</sup> Ohm	≤ 2 sec ≥ 0.3 sec 18 to 28 VDC 2 to 20 mA <150 Ohm 8 to 12 VDC 78.5 (µm/sec <sup>2</sup> )/√Hz 49.1 (µm/sec <sup>2</sup> )/√Hz 39.2 (µm/sec <sup>2</sup> )/√Hz >10 <sup>8</sup> Ohm	<b>NOTES:</b> [1] Typical. [2] Conversion Factor 1g = 9.81 m/s <sup>2</sup> . [3] Zero-based, least-squares, straight line method. [4] Measured with mounting stud. [5] 1/4-28 has no equivalent in S.I. units. [6] 1/8" hex Allen key required for English version, 3mm hex Allen key required for metric version. [7] Stud torque must exceed sensor hex nut torque to ensure proper dismantling. [8] Stainless steel armor jacket over twisted shielded pair. [9] See PCB Declaration of Conformance PS023 or PS060 for details.										
<b>Physical</b> Size (Hex x Height) Weight(without cable) Mounting Mounting Thread Mounting Torque(stud) Mounting Torque(hex nut) Sensing Element Sensing Geometry Housing Material Sealing Electrical Connector Electrical Connection Position Cable Length Cable Type	9/16 in x 1.0 in 1.1 oz Stud 1/4-28 Male 3 to 4 ft-lb 2 to 3 ft-lb Ceramic Shear Stainless Steel Welded Hermetic Integral Armored Cable Side 10 ft Polyurethane	14 mm x 25.4 mm 31 gm Stud 1/4-28 Male 4.1 to 5.4 Nm 2.7 to 4.1 Nm Ceramic Shear Stainless Steel Welded Hermetic Integral Armored Cable Side 3.0 m Polyurethane	<b>SUPPLIED ACCESSORIES:</b> Model 080A156 Mounting Base (1) Model ICS-2 NIST-traceable single-axis single-point amplitude response calibration at 6000 cpm (100 Hz)  <b>OPTIONAL ACCESSORIES:</b> Model M080A159 Mounting stud, 1/2-20 to M6 x 1 (1)										
	<p style="text-align: center;">Typical Sensitivity Deviation vs Temperature</p> 		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">Entered: AP</td> <td style="width: 20%;">Engineer: jg</td> <td style="width: 20%;">Sales: BRS</td> <td style="width: 20%;">Approved: BAM</td> <td style="width: 20%;">Spec Number:</td> </tr> <tr> <td>Date: 5/20/2014</td> <td>Date: 5/20/2014</td> <td>Date: 5/20/2014</td> <td>Date: 5/20/2014</td> <td style="text-align: center;"><b>58894</b></td> </tr> </table>	Entered: AP	Engineer: jg	Sales: BRS	Approved: BAM	Spec Number:	Date: 5/20/2014	Date: 5/20/2014	Date: 5/20/2014	Date: 5/20/2014	<b>58894</b>
Entered: AP	Engineer: jg	Sales: BRS	Approved: BAM	Spec Number:									
Date: 5/20/2014	Date: 5/20/2014	Date: 5/20/2014	Date: 5/20/2014	<b>58894</b>									
All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB Group, Inc.		 <b>IMI SENSORS</b> A PCB PIEZOTRONICS DIV. 3425 Walden Avenue, Depew, NY 14043  <b>Phone: 800-959-4464</b> <b>Fax: 716-684-3823</b> <b>E-Mail: imi@pcb.com</b>											