

# ACCESSORIES

## Adaptors & Filters

<b>079A02</b>	1/4" microphone to 1/2" preamplifier adaptor
<b>079B03</b>	1/2" microphone to 1/4" preamplifier adaptor
<b>079B25</b>	1" microphone to 1/2" preamplifier adaptor
<b>079A43</b>	1/2" low frequency adaptor (for 378A07)
<b>079A24</b>	Tripod stand adaptor to convert 5/8" stud to 1/4" for holder
<b>079A29</b>	Swivel head, stand to holder adaptor
<b>079A41</b>	Right angle adaptor for 1/4" microphone
<b>079A42</b>	Right angle adaptor for 1/2" microphone
<b>426B02</b>	1/2" in-line A-weighted filter

## Environmental Protection

<b>079A06</b>	3-1/2" windscreen for 1/2" microphone
<b>079A07</b>	3-1/2" windscreen for 1/4" microphone
<b>079A53</b>	3/4" windscreen for 1/4" microphone
<b>079C20</b>	Nose cone for 1/4" microphone
<b>079B21</b>	Nose cone for 1/2" microphone
<b>079A46</b>	5 pack of water/dust resistant pads (for 130A24)
<b>EPS2116</b>	Outdoor protection, 3/4" mount & 1/4"-20 side exit mount

## Holders & Stands

<b>079B10</b>	Holder for 1/4" microphone
<b>079A11</b>	Holder for 1/2" microphone
<b>079A49</b>	Holder for 48V phantom power preamplifier
<b>079C23</b>	Holder for both 1/4" and 1/2" microphone
<b>079B32</b>	Clip holder for 1/4" microphone
<b>079A15</b>	Tripod stand with boom arm
<b>079B16</b>	Miniature tripod stand with adjustable legs
<b>079B17</b>	Camera tripod stand
<b>079A18</b>	Adjustable clamp holder, large
<b>079A45</b>	Adjustable clamp holder, small
<b>079A44</b>	5 link extension arm for clamp holder
<b>379A02</b>	Array microphone stand (6' x 6' or 1.8m x 1.8m)

## ICP® Signal Conditioners

<b>480B21</b>	3 channel sensor signal conditioner
<b>480C02</b>	Battery powered ICP® sensor signal conditioner
<b>482C05</b>	4 channel sensor signal conditioner
<b>483C05</b>	8 channel sensor signal conditioner
<b>483C41</b>	8 channel line-powered signal conditioner
<b>485B36</b>	USB dual channel ICP® sensor signal conditioner

## Calibrator, Class One

<b>CAL 200</b>	Up to 1/2" microphone 1000 Hz, 94/114 dB
<b>CAL 250</b>	Up to 1" microphone 250 Hz, 114 dB

# EXTERNALLY POLARIZED

## 1" Microphones

<b>2570</b>	Free-field, low frequency & low noise
<b>2575</b>	Pressure, low frequency & low noise

## 1/2" Microphones

<b>2540</b>	Free-field, mid - high frequency & amplitude
<b>2559</b>	Random incidence, mid - high frequency & amplitude (25 kHz $\pm$ 2 dB)
<b>2560</b>	Random incidence, high sensitivity, low - medium amplitude
<b>377C41</b>	Free-field, high sensitivity, low frequency & low noise

## 1/4" Microphones

<b>2520</b>	Free-field, mid - high frequency & amplitude
<b>2530</b>	Pressure, rear-vented, ultrasound, high frequency & amplitude

## 1/2" Preamplifier

<b>426A30</b>	General purpose (low noise)
---------------	-----------------------------

## 1/4" Preamplifier

<b>426B31</b>	General purpose (with integral cable)
---------------	---------------------------------------


PCB's prepolarized and externally polarized condenser microphones have been tested and meet Type 1/Class 1 specifications when integrated with sound level meters from some of the top manufacturers.



3425 Walden Avenue, Depew, NY 14043 USA

pcb.com | info@pcb.com | 800 828 8840 | +1 716 684 0001

© 2021 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevo is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevo), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at [www.pcb.com/trademarkownership](http://www.pcb.com/trademarkownership).

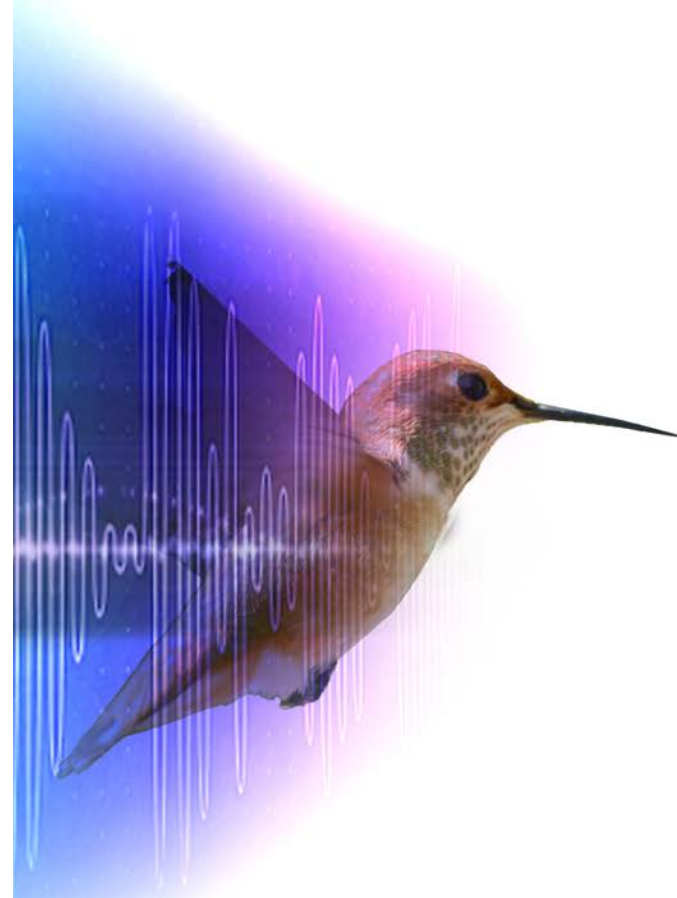

# MICROPHONES, SYSTEMS, & ACCESSORIES



pcb.com/mics | 1 800 828 8840

# PREPOLARIZED FREE-FIELD RESPONSE

## 1/2" Microphones

### SYSTEMS

- 378B02** High sensitivity, low - medium amplitude (15.5 dBA noise floor)
- 378A06** Mid - high frequency & amplitude (to 40 kHz & 150 dB)
- 376B02** High sensitivity, low - medium amplitude (uses short preamplifier)
- 378A07** Infrasound, extremely low frequency (to 0.1 Hz)
- HT378B02** High temperature, high sensitivity, low - medium amplitude (to 125 °C)
- 376A32** 48V phantom power, high sensitivity, low - medium amplitude (15.5 dBA noise floor)
- 376A33** 48V phantom power, mid - high frequency & amplitude (to 40 kHz & 150 dB)
- 379A33** Stereo matched pair of 376A33's

### CARTRIDGES

- 377B02** Low - medium frequency & amplitude (15 dBA to 147 dB)
- 377A06** Mid - high frequency & amplitude (to 40 kHz & 160 dB)
- 377A07** Infrasound, extremely low frequency (to 0.1 Hz)

## 1/4" Microphones

### SYSTEMS

- 378C01** Ultrasound, high frequency & amplitude (to 100 kHz & 165 dB)
- 376A31** 48V phantom power, ultrasound, high frequency & amplitude (to 100 kHz & 165 dB)

### CARTRIDGES

- 377C01** Ultrasound, high frequency & amplitude (to 100 kHz & 168 dB)

### ARRAY

- 130F20** General purpose, BNC connector
- 130F21** General purpose, 10-32 connector
- 130F22** General purpose, SMB connector
- 130A23** High frequency & amplitude (20 kHz & 150 dB)



Check Out Our Series of  
**ACOUSTIC EDUCATIONAL VIDEOS**  
[www.pcb.com/AcousticVideos](http://www.pcb.com/AcousticVideos)

# PREPOLARIZED PRESSURE FIELD RESPONSE

## 1/2" Microphones

### SYSTEMS

- 378B11** Infrasound, high sensitivity, low frequency & low noise (16 dBA noise floor)
- 378C13** Mid - high amplitude (to 20 kHz and 150 dB)

### CARTRIDGES

- 377B11** Infrasound, high sensitivity, low frequency & low noise (14 dBA to 146 dB)
- 377C13** Mid - high amplitude (18 dBA to 162 dB)

## 1/4" Microphones

### SYSTEMS

- 378A12** Extremely high amplitude (194 dB peak)
- 378A14** Ultrasound, side-vented, high frequency & amplitude (70 kHz & 173 dB)
- 378C10** Ultrasound, rear-vented, high frequency & amplitude (70 kHz & 173 dB)

### CARTRIDGES

- 377A12** Extremely high amplitude (194 dB peak)
- 377A14** Ultrasound, side-vented, high frequency & amplitude (70 kHz & 178 dB)
- 377C10** Ultrasound, rear-vented, high frequency & amplitude (70 kHz & 178 dB)

# SPECIALTY MICROPHONES

### SYSTEMS

- 377B26** Probe for high temperature and space constrained environments (to 800 °C)
- 378A04** 1/2" Low noise (5.5 dBA), high sensitivity
- EX378B02** 1/2" Intrinsically-safe for hazardous environments

### CARTRIDGES

- 377A15** 1" Pressure field, low - medium frequency & amplitude (10 dBA)

### ARRAY

- 130B40** Low profile, surface or flush mount (1/8" or 3mm high)
- 130A24** Rugged, water & dust resistant (to 150 dB)

# PREPOLARIZED RANDOM INCIDENCE RESPONSE

## 1/2" Microphones

### SYSTEMS

- 378C20** High sensitivity, low - medium amplitude (16 dBA & 16 kHz)
- 378A21** Mid - high frequency & amplitude (to 25 kHz  $\pm$ 2 dB & 150 dB)
- HT378C20** High temperature & high sensitivity, low - medium amplitude (to 120 °C)

### CARTRIDGES

- 377C20** Low - medium frequency & amplitude (14 dBA & 16 kHz)
- 377A21** Mid - high frequency & amplitude, (to 25 kHz  $\pm$ 2dB & 162 dB)

# PREAMPLIFIERS

## For 1/2" Microphones

- 426E01** General purpose (low noise)
- 426A10** 20 Hz high pass filter
- 426A11** Switchable gain, A-wt and 20 Hz high pass filter (maximum flexibility)
- HT426E01** High temperature (to 125 °C)
- 426A13** Short profile for confined areas (length 1.4" or 35.7mm)
- 426A14** 48V phantom power preamplifier

## For 1/4" Microphones

- 426B03** General purpose (low noise)
- 426A05** For use with side-vented microphones (for 377A14)
- 426A07** Short profile for confined areas (length 1.2" or 29.5mm)
- 426A14** 48V phantom power preamplifier

