




SERIES 3501 & 3503

# MEMS HIGH-G SHOCK ACCELEROMETERS

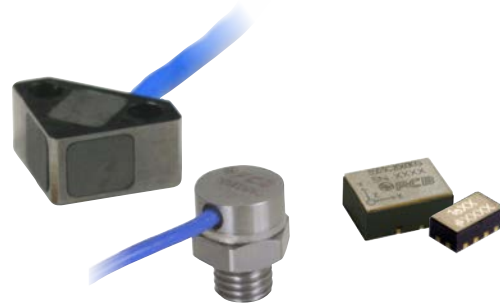

- Packaged and SMT configurations
- Single axis and triaxial
- Mechanical over-range stops improve survivability
- Slight damping reduces resonance amplification
- Excellent amplitude linearity
- Low power consumption




## TYPICAL APPLICATIONS

- Metal-to-metal impact & pyroshock
- Data recorders, penetrator & launch tests
- Consumer electronics drop testing
- Sporting goods and impact tool testing
- Blast loading & survivability of structures
- Fuze, safe and arm

## STATE-OF-THE-ART MEMS DESIGN AND FABRICATION

Series 3501 and 3503 Piezoresistive MEMS high-amplitude shock accelerometers represent state-of-the-art industry technology for miniature, high amplitude, DC response sensors. This series is capable of measuring long duration transient motion as well as responding to and surviving extremely fast rise times, typical of a high-g shock event as found in explosive, gun and impact testing. Both packaged and OEM configurations are offered, to fulfill a variety of installation requirements.

The hermetically sealed sensing element is air-damped with over range stops intended to improve survivability and is a full active Wheatstone bridge with high input resistance for low power consumption. It is micromachined from single crystal silicon and manufactured with the latest advances in etching techniques and equipment using deep reactive ion etching (DRIE).

SERIES 3501 AND 3503	SURFACE MOUNT	INTEGRAL STUD	THROUGH HOLES (2)	
				
<b>2 KG</b>				
<b>Model Number</b>	<b>3501A202KG</b>	<b>3503C202KG</b>	<b>3501B122KG</b>	<b>3503A112KG</b>
<b>Performance</b>				
Sensitivity (±50%) (at 10VDC)	0.2 mV/g 0.02 mV/(m/s <sup>2</sup> )	0.10 mV/g 0.01 mV/(m/s <sup>2</sup> )	0.20 mV/g 0.02 mV/(m/s <sup>2</sup> )	0.20 mV/g 0.02 mV/(m/s <sup>2</sup> )
Sensitivity (raw)	0.02 mV/V/g 0.002 mV/V/(m/s <sup>2</sup> )	0.02 mV/V/g 0.002 mV/V/(m/s <sup>2</sup> )	0.02 mV/V/g 0.002 mV/V/(m/s <sup>2</sup> )	0.02 mV/V/g 0.002 mV/V/(m/s <sup>2</sup> )
Measurement Range	±2000 g ±19610 m/s <sup>2</sup> pk	±2000 g ±19613 m/s <sup>2</sup> pk	±2000 g ±19620 m/s <sup>2</sup> pk	±2000 g ±19620 m/s <sup>2</sup> pk
Frequency Range (±1dB)	0-10000 Hz	0-10000 Hz	0-10000 Hz	0-10000 Hz
Resonant Frequency	>20 kHz	>20 kHz	>20 kHz	≥20 kHz
Damping Ratio	0.7 % Critical	—	70 % Critical	0.7 % Critical
Non-Linearity	±1 %	—	±1 %	±1 %
Non-Linearity (per 1000 g, 9810 m/s <sup>2</sup> )	—	±1 %	—	—
Transverse Sensitivity	≤3 %	≤3 %	≤3 %	≤3 %
<b>Environmental</b>				
Temperature Range (Operating)	-65-250 °F -54-121 °C	-65-150 °F -54-65 °C	-65-250 °F -54-121 °C	-65-250 °F -54-121 °C
<b>Electrical</b>				
Excitation Voltage (Maximum)	15.0 VDC	12.0 VDC	15.0 VDC	15.0 VDC
<b>20 KG</b>				
<b>Model Number</b>	<b>3501A2020KG</b>	<b>3503C2020KG</b>	<b>3501B1220KG</b>	<b>3503A1120KG</b>
<b>Performance</b>				
Sensitivity (±50%) (at 10VDC)	0.010 mV/g 0.001 mV/(m/s <sup>2</sup> )	0.005 mV/g 0.0005 mV/(m/s <sup>2</sup> )	0.010 mV/g 0.001 mV/(m/s <sup>2</sup> )	0.010 mV/g 0.001 mV/(m/s <sup>2</sup> )
Sensitivity (raw)	0.001 mV/V/g 0.0001 mV/V/(m/s <sup>2</sup> )	0.001 mV/V/g 0.0001 mV/V/(m/s <sup>2</sup> )	0.001 mV/V/g 0.0001 mV/V/(m/s <sup>2</sup> )	0.001 mV/V/g 0.0001 mV/V/(m/s <sup>2</sup> )
Measurement Range	±20000 g ±196100 m/s <sup>2</sup> pk	±20000 g ±196133 m/s <sup>2</sup> pk	±20000 g ±196100 m/s <sup>2</sup> pk	±20000 g ±0-196100 m/s <sup>2</sup> pk
Frequency Range (1dB)	0-10000 Hz	0-10000 Hz	0-10000 Hz	0-10000 Hz
Resonant Frequency	>60 kHz	>60 kHz	>60 kHz	>60 kHz
Damping Ratio	5 % Critical	5 % Critical	5 % Critical	5 % Critical
Non-Linearity (per 10000 g (98100 m/s <sup>2</sup> ))	±1 %	±1 %	≤1 %	±1 %
Transverse Sensitivity	≤3 %	≤3 %	≤3 %	≤3 %
<b>Environmental</b>				
Temperature Range (Operating)	-65-250 °F -54-121 °C	-65-150 °F -54-65 °C	-65-250 °F -54-121 °C	-65-250 °F -54-121 °C
<b>Electrical</b>				
Excitation Voltage (Maximum)	15.0 VDC	15.0 VDC	12.0 VDC	15.0 VDC
<b>60 KG</b>				
<b>Model Number</b>	<b>3501A2060KG</b>	<b>3503C2060KG</b>	<b>3501B1260KG</b>	<b>3503A1160KG</b>
<b>Performance</b>				
Sensitivity (±50%) (at 10 VDC)	.003 mV/g .0003 mV/(m/s <sup>2</sup> )	0.0015 mV/g 0.00015 mV/(m/s <sup>2</sup> )	0.003 mV/g 0.0003 mV/(m/s <sup>2</sup> )	0.003 mV/g .0003 mV/(m/s <sup>2</sup> )
Sensitivity (raw)	0.0003 mV/V/g 0.00003 mV/V/(m/s <sup>2</sup> )	0.0003 mV/V/g 0.00003 mV/V/(m/s <sup>2</sup> )	0.0003 mV/V/g 0.00003 mV/V/(m/s <sup>2</sup> )	0.0003 mV/V/g 0.00003 mV/V/(m/s <sup>2</sup> )
Measurement Range	±60000 g ±588400 m/s <sup>2</sup> pk	±60000 g ±588400 m/s <sup>2</sup> pk	±60000 g ±588400 m/s <sup>2</sup> pk	±60000 g ±588400 m/s <sup>2</sup> pk
Frequency Range (1dB)	0-20000 Hz	0-10000 Hz	0-20000 Hz	0-10000 Hz
Resonant Frequency	>120 kHz	>150 kHz	>120 kHz	≥120 kHz
Damping Ratio	2 % Critical	2 % Critical	2 % Critical	2 % Critical
Non-Linearity (per 10000 g (98100 m/s <sup>2</sup> ))	±1 %	±1 %	≤1 %	±1 %
Transverse Sensitivity	≤3 %	≤3 %	≤3 %	≤3 %
<b>Environmental</b>				
Temperature Range (Operating)	-65-250 °F -54-121 °C	-65-150 °F -54-65 °C	-65-250 °F -54-121 °C	-65-250 °F -54-121 °C
<b>Electrical</b>				
Excitation Voltage (Maximum)	15.0 VDC	12.0 VDC	15.0 VDC	15.0 VDC

## MODEL NUMBERING SYSTEM FOR SERIES 3501 AND 3503 MEMS HIGH-AMPLITUDE SHOCK ACCELEROMETERS

### Single Axis Series 3501

3501	Single axis, MEMS DC response shock accelerometer		
<b>1) Configurations</b>			
B12 A20	Titanium housing, mounted with integral 1/4-28 thread stud, side cable exit Housed in a SMT leadless chip carrier to facilitate surface mount installation		
<b>2) Measurement Range</b>			
2KG	±2000 G		
20KG	±20000 G		
60KG	±60000 G		
<b>3) Integral Cable Length for configuration 3501B12XXG (add only if other than standard length shown above)</b>			
/ XXX	Specify XXX, as desired in feet		
<b>4) Cable Termination (add only if selecting other than pigtail connection)</b>			
LN	Mini 8-pin DIN connector		
AY	4-pin plug		
CA	4-pin jack		

### Triaxial Series 3503 (Q309)

3503	Triaxial, MEMS DC response shock accelerometer		
<b>1) Configurations</b>			
A11 C20	Titanium housing, two through-holes for 4-40 mounting bolts Triaxial MEMS accelerometer, surface mount technology		
<b>2) Measurement Range</b>			
2KG	±2000 G		
20KG	±20000 G		
60KG	±60000 G		
<b>3) Integral Cable Length for configuration 3503A11XXG only (add only if other than standard length shown above)</b>			
/ XXX	Specify XXX, as desired in feet		
<b>4) Cable Termination (add only if selecting other than pigtail connection)</b>			
LY	(3) LN Mini 8-pin DIN connectors in a triple splice		

### Examples

3501	B12	60KG			Single axis, titanium housing, mounted with integral 1/4-28 thread stud, side cable exit, 60000 G range
3503	A11	2KG	1020	LY	Triaxial, titanium housing, two through-holes for 4-40 mounting bolts, 2000 G range, 20 ft (6.1m) cable terminating with (3) LN mini 8-pin DIN connectors



### LN Mini 8-Pin DIN Connector

Bridge input mating connector

MEMS SENSOR SIGNAL CONDITIONER		
Model Number	482C27	483C28
Channels	4	8
Sensor Input Types	Differential & Single-ended MEMS/Bridge, ICP®, Voltage	Differential & Single-ended MEMS/Bridge, ICP®, Voltage
Compatible Sensor Series	3501, 3503, 3711, 3713, 3741, 3991	3501, 3503, 3711, 3713, 3741, 3991
Gain	x0.1 to x2000; x0.1 to x200 [1]	x0.1 to x2000; x0.1 to x200 [1]
Gain Increment	0.1	0.1
Output Range	±10 V	±10 V
Frequency Response	DC to 100k Hz (-3dB) [2]	DC to 100k Hz (-3dB) [2]
Temperature Range (Operating)	+32 to +120 °F 0 to +50 °C	+32 to +120 °F 0 to +50 °C
Excitation Voltage	-12 VDC to +12 VDC [3]	-12 VDC to +12 VDC [3]
Computer Control	Ethernet/RS-232	Ethernet
Power Required	9 to 18 VDC [4]	100 to 240 VAC (47 to 63 Hz)
Input Connectors	(4) 8-socket mini DIN (4) BNC Jacks	(8) 8-socket mini DIN (8) BNC Jacks
Output Connectors	BNC Jacks	BNC Jacks
Size (Height x Width x Depth)	3.2 in x 8.0 in x 5.9 in 8.1 cm x 20 cm x 15 cm	1.75 in x 19.0 in x 13.7 in 44.5 cm x 482.6 cm x 348 cm
Weight	2.5 lb 1.134 kg	7.0 lb 3.18 kg
<b>Supplied Accessories</b>		
482C27: (1) 017AXX Power Cord; (1) 488B14/NC Universal Power Adaptor; (1) MCSC Control Software		
483C28: (1) 017AXX Power Cord; (1) MCSC Control Software		
<b>Additional Accessories</b>		
Auto Lighter Adaptor	488A13	—
<b>Notes</b>		
[1] Maximum gain for Bridge/MEMS input is x2000 and for ICP®/Voltage input is x200.		
[2] Low frequency response is 0.05 Hz when AC coupled.		
[3] In bipolar mode, +Vexc and -Vexc track each other. They are equal and opposite.		
[4] Supplied with 100 to 240 VAC, 50 to 60 Hz Universal Power Adaptor.		

Models 482C27 (4-channels, bench top) and 483C28 (8-channels, rack mount) are full-featured signal conditioners. They offer low noise operation and are simple to use. Each channel is selectable between several input types: MEMS/Bridge, MEMS/Single-ended, ICP® and Voltage.

The models offer a -12 VDC to +12 VDC excitation voltage for MEMS/Bridge and MEMS/Single-ended sensors. Additional features are incremental gain from x0.1 to x2000, auto zero, auto balance, AC/DC coupling, normalization and shunt calibration. The bridge inputs are compatible with full, half and quarter bridge sensors.

The ICP® inputs offer 24 VDC and 2 to 20 mA of constant current excitation for powering ICP® sensors and in-line ICP® charge convertors. Additional features are incremental gain from x0.1 to x200, normalization and AC/DC coupling.

The 482C27 is powered from 9 to 18 VDC, but is supplied with a universal AC power adaptor. An optional auto lighter adaptor is also available (model 488A13). The 483C28 is line powered only.



**Model 483C28**  
8-channel version, computer control only



**Model 482C27**  
Front Panel



**Model 482C27**  
Rear Panel



MTS SYSTEMS CORPORATION  
3425 Walden Avenue, Depew, NY 14043-2495 USA  
Toll-Free in the USA: 800 828 8840  
Phone: 1 716 684 0001 | Email: info@pcb.com

PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.

© 2019 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLineSM is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States.



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.