

SERIES 208C

GENERAL PURPOSE ICP[®] QUARTZ FORCE SENSORS



- Sensitivities from 1 mV/lb to 500 mV/lb
- Factory preloaded for both tension and compression measurement
- High resolution with low noise floor
- Includes impact cap, calibration certificate, UNF & metric mounting studs.

TYPICAL APPLICATIONS



- Validation of dynamic force in repetitive process operations
- Drop testing & integrated into force plates
- Automation & machine tool processes
- Material sample testing equipment

General purpose force sensors are constructed with stainless steel housings and piezoelectric quartz sensing elements, which are “sandwiched” between upper and lower base plates. The sensing elements are preloaded in compression to a specific value and welded into an assembly. This construction results in an extremely stiff sensor with an upper frequency limit of 36000 Hz. Each unit is factory calibrated for dynamic force measurement applications; compression, tension, and impact.

PCB[®] Platinum models (208C01-208C05) referenced here are internally threaded and hermetically sealed with side mounted connectors. The internal threads can accommodate stud mounting and/or threaded fasteners. Note that tensile measurement is limited by internal, factory preload, the number of threads engaged, and tensile yield strength of associated fasteners. Five measurement ranges are offered with full-scale measurement ranges from 10 lb (45 N) to 5000 lb (22k N) compression and up to 500 lb (2200 N) tension. For higher measurement ranges, consider other PCB designs such as: Force Ring, Force Link, or Impact-style sensors.

SPECIFICATIONS

Model Number	208C01		208C02		208C03		208C04		208C05		
	English	SI	English	SI	English	SI	English	SI	English	SI	
Performance											
Sensitivity (±15%)	500 mV/lb	112410 mV/kN	50 mV/lb	11241 mV/kN	10 mV/lb	2248 mV/kN	5 mV/lb	1124 mV/kN	1 mV/lb	224.82 mV/kN	
Measurement Range (Compression)	10 lb	0.0445 kN	100 lb	0.445 kN	500 lb	2.224 kN	1000 lb	4.448 kN	5000 lb	22.24 kN	
Measurement Range (Tension)	10 lb	0.0445 kN	100 lb	0.445 kN	500 lb	2.224 kN	500 lb	2.224 kN	500 lb	2.224 kN	
Maximum Static Force (Compression)	60 lb	0.27 kN	600 lb	2.669 kN	3000 lb	13.50 kN	6000 lb	26.69 kN	8000 lb	35.59 kN	
Maximum Static Force (Tension)	60 lb	0.27 kN	500 lb	2.669 kN	500 lb	2.224 kN	500 lb	2.224 kN	500 lb	2.224 kN	
Broadband Resolution (1 to 10000 Hz)	0.0001 lb-rms	0.0005 N-rms	0.001 lb-rms	0.004 N-rms	0.005 lb-rms	0.02 N-rms	0.01 lb-rms	0.0445 N-rms	0.05 lb-rms	0.222 N-rms	
Upper Frequency Limit	36000 Hz										
Non-Linearity	≤1 % FS										
Environmental											
Temperature Range	-65 to +250 °F (-54 to +121 °C)										
Temperature Coefficient of Sensitivity	≤0.05 %/°F (≤0.09 %/°C)										
Electrical											
Discharge Time Constant	≥50 sec		≥500 sec		≥2000 sec						
Excitation Voltage	18 to 30 VDC		20 to 30 VDC								
Constant Current Excitation	2 to 20 mA										
Output Impedance	≤100 Ohm										
Output Bias Voltage	8 to 12 VDC				8 to 14 VDC						
Spectral Noise (1Hz)	0.0000126 lb/√Hz	0.000056 N/√Hz	0.000135 lb/√Hz	0.000603 N/√Hz	0.000211 lb/√Hz	0.000942 N/√Hz	0.000798 lb/√Hz	0.00356 N/√Hz	0.00168 lb/√Hz	0.00750 N/√Hz	
Spectral Noise (10Hz)	0.00000424 lb/√Hz	0.0000189 N/√Hz	0.0000276 lb/√Hz	0.000123 N/√Hz	0.000109 lb/√Hz	0.000488 N/√Hz	0.000286 lb/√Hz	0.00128 N/√Hz	0.00112 lb/√Hz	0.00501 N/√Hz	
Spectral Noise (100Hz)	0.00000149 lb/√Hz	0.0000067 N/√Hz	0.0000096 lb/√Hz	0.000043 N/√Hz	0.000039 lb/√Hz	0.000173 N/√Hz	0.000086 lb/√Hz	0.000384 N/√Hz	0.000459 lb/√Hz	0.00205 N/√Hz	
Spectral Noise (1000Hz)	0.00000052 lb/√Hz	0.0000023 N/√Hz	0.0000021 lb/√Hz	0.0000095 N/√Hz	0.0000086 lb/√Hz	0.000039 N/√Hz	0.000028 lb/√Hz	0.000123 N/√Hz	0.000133 lb/√Hz	0.000592 N/√Hz	
Output Polarity, Compression	Positive										
Physical											
Stiffness - typical	6 lb/μin (1.05 kN/μm)										
Weight	0.80 oz (22.7 gm)										
Housing / Connector / Mount	Hermetic stainless steel housing, side mounted 10-32 coaxial jack, 10-32 internal mounting thread										
Supplied Accessories											
084A03 Impact Cap, Qty 1 080A81 Thread Locker, Qty 1 081B05 Mounting Stud, BeCu (10-32 to 10-32), Qty 2 M081A62 Mounting stud, BeCu (10-32 to M6 x 1), Qty 2 Calibration per FCS-46, Full Scale Range in 20% intervals, compression only - certificate provided.											

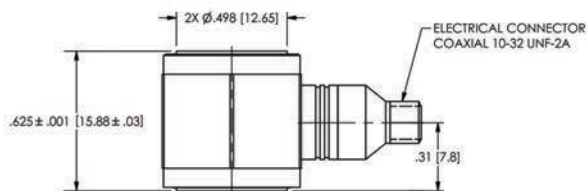

3425 Walden Avenue, Depew, NY 14043-2495 USA
Toll-Free in the USA: 800 828 8840
Phone: 1 716 684 0001 | Email: info@pcb.com

PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit www.pcb.com for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at www.mts.com.

© 2019 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLineSM is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States.

TM-FRC-208C-0120



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.