



SERIES  
3711F, 3713F, 3741F & 3743F

# MEMS DC RESPONSE ACCELEROMETERS

- Six measurement ranges from  $\pm 2$  to  $\pm 200$  g
- Improved frequency response
- Reduced spectral noise
- Improved broadband resolution
- Single-ended or differential output signal
- Lightweight titanium or aluminum housings

## TYPICAL APPLICATIONS

- Aerospace Vibration Testing - Flutter/Buffering & Landing Gear
- Simulated Environmental Testing with Shakers & Centrifuges
- Suspension, Shock Absorption, and Damping
- Driveability, Ride & Handling
- Brake & Steering Development
- Road Load Data Acquisition (RLDA)



## LOW FREQUENCY MEASUREMENTS WITH GAS-DAMPED, SILICON MEMS TECHNOLOGY

PCB® Series 3711 (single axis), 3713 (triaxial), and 3741 (single axis, differential output), 3743 (triaxial, differential output) MEMS DC response accelerometers are designed to measure low-frequency vibration and motion and are offered in full-scale ranges from  $\pm 2$  to  $\pm 200$  g to accommodate a variety of testing requirements. The units feature gas-damped, silicon MEMS sensing elements for uniform, repeatable performance and offer high frequency overload protection.

Electrically, the units offer a single-ended or differential output signal with power, signal, and ground leads for each channel. Supply voltage regulation permits operation from +5 to +32 VDC and the low-noise, low-impedance output signal may be transmitted over long cable lengths without degradation.

As with all PCB instrumentation, these sensors are complemented with toll-free applications assistance, 24-hour customer service, and are backed by a no-risk policy that guarantees total customer satisfaction.

Rugged and Durable Series 3711 & 3713 MEMS DC Response sensors are hermetically sealed in a robust titanium housing allowing for a very stable and accurate measurement in the most severe operating environments. In addition, this series is inherently insensitive to base strain and transverse acceleration effects. Supply voltage regulation permits operation from +5 to +32 VDC and the single-ended, low-noise, low-impedance output signal may be transmitted over long cable lengths without degradation. The series is available in single axis and triaxial versions with a 10 ft (3 m) integral cable or a multi-pin, threaded, electrical connector for easy installation and setup.



**Series 3711F11**



**Series 3713F11**



**Series 3711F12**  
(with integral cable)



**Series 3713F12**  
(with integral cable)

Precision Series 3741 and 3743 MEMS DC Response sensors offer a differential output signal for common-mode noise rejection and incorporate many advanced features. This includes supply voltage regulation and a temperature compensation circuit for stable performance over the entire operational temperature range. The 3741 features a low profile and lightweight hard-anodized aluminum housing with an integral, 4-conductor 10 ft (3 m) shielded cable. An optional mounting adaptor, 080A208, facilitates biaxial or triaxial configurations. The 3743 features a rugged, hermetic Titanium package with an integral 9-pin connector and stable performance in extreme measurement environments.



**Series 3741F12**



**Series 3743F11**

### SINGLE ENDED OUTPUT – MEMS DC RESPONSE

Sensitivity	Measurement Range (pk)	Frequency (± 5%)	Broadband Resolution (rms)
6.75 mV/g	± 200 g	0 to 1500 Hz	6.0 mg
13.5 mV/g	± 100 g	0 to 1500 Hz	3.0 mg
27.0 mV/g	± 50 g	0 to 1500 Hz	1.5 mg
45.0 mV/g	± 30 g	0 to 1500 Hz	0.9 mg
135 mV/g	± 10 g	0 to 1000 Hz	0.3 mg
675 mV/g	± 2 g	0 to 250 Hz	0.06 mg
Model Number	3711 Single Axis	3713 Triaxial	
Overload Limit (Shock)	± 5000 g pk	± 3000 g pk	
Temperature Range	-65 to +250 °F (-54 to +121 °C)	-65 to +250 °F (-54 to +121 °C)	
Excitation Voltage	5 to 32 VDC	5 to 32 VDC	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Size (H x L x W)	0.45 x 0.85 x 0.85 in (11.4 x 21.6 x 21.6 mm)	0.80 in cube (20.3 mm cube)	
Weight: Connector style	0.58 oz (16.3 gm)	0.58 oz (17.3 gm)	
Integral cable style	2.29 oz (65.0 gm)	4.2 oz (119.0 gm)	
Electrical Connector	1/4-28 4-Pin or 10 ft (3 m) integral cable	9-Pin or 10 ft (3 m) integral cable	
Supplied Accessories			
Easy Mount Clip	080A152	—	
Adhesive Base	—	080A12	
Mounting Screw / Stud	081A113 / M081A113	081B05 / M081B05	
Additional Accessories			
Triaxial Mounting Block	080A153	—	
Mounting Cable Connector	AY	EN	
Recommended Cable	010	037	

### DIFFERENTIAL OUTPUT – MEMS DC RESPONSE

Sensitivity	Measurement Range (pk)	Frequency (± 5%)	Broadband Resolution (rms)
13.5 mV/g	± 200 g	0 to 1500 Hz	6.0 mg
27 mV/g	± 100 g	0 to 1500 Hz	3.0 mg
54 mV/g	± 50 g	0 to 1500 Hz	1.5 mg
90 mV/g	± 30 g	0 to 1500 Hz	0.9 mg
270 mV/g	± 10 g	0 to 1000 Hz	0.3 mg
1350 mV/g	± 2 g	0 to 250 Hz	0.06 mg
Model Number	3741 Single Axis	3743 Triaxial	
Overload Limit (Shock)	± 5000 g pk	± 5000 g pk	
Temperature Range	-65 to +250 °F (-54 to +121 °C)	-65 to +250 °F (-54 to +121 °C)	
Excitation Voltage	5 to 32 VDC	5 to 32 VDC	
Housing Material	Anodized Aluminum	Titanium	
Sealing	Epoxy	Hermetic	
Size (H x L x W)	0.30 x 1.00 x 0.85 in (7.62 x 25.4 x 21.6 mm)	0.8 x 0.8 x 0.8 in (20.3 x 20.3 x 20.3 mm)	
Weight without cable	0.35 oz (9.9 gm)	0.6 oz (17.3 gm)	
Electrical Connector	10 ft (3 m) integral cable to pigtailed	9-Pin	
Supplied Accessories			
Mounting Screws/Studs	(2) 081A103 / (2) M081A103	(1) 080A12 / (1) 081B05 / (1) M081B05	
Additional Accessories			
Triaxial Mounting Block	080A208	—	
Mounting Cable Connector	—	EN	
Recommended Cable	—	037G	

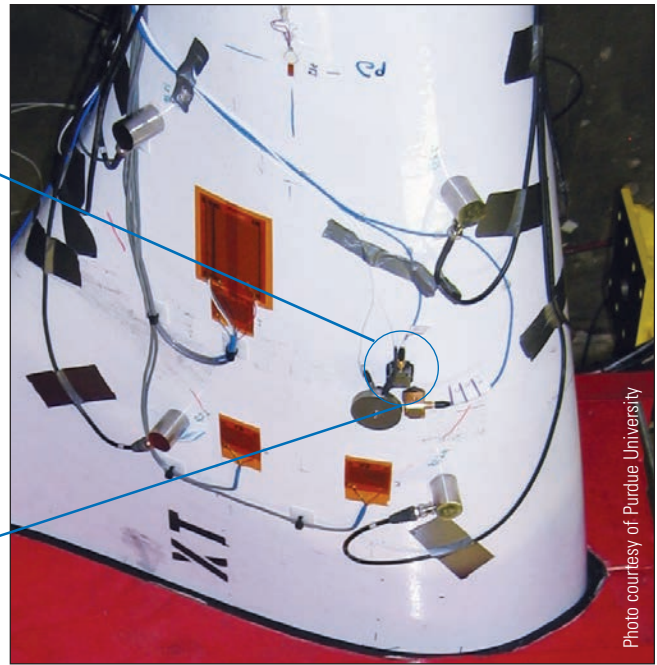


Photo courtesy of Purdue University

## MODEL NUMBERING SYSTEM

### 1) Series

3711F	Single axis, MEMS DC response accelerometer
3713F	Triaxial, MEMS DC response accelerometer
3741F	Single axis, MEMS DC response accelerometer, differential
3743F	Triaxial, MEMS DC response accelerometer, differential

### 2) Cable

11	Multi-pin, threaded, electrical connector (3711, 3713 & 3743 only)
12	Standard, 10 ft (3.0 m) integral cable and pigtail termination

### 3) Measurement Range

2G	± 2 g measurement range
10G	± 10 g measurement range
30G	± 30 g measurement range
50G	± 50 g measurement range
100G	± 100 g measurement range
200G	± 200 g measurement range

### 4) Integral Cable Length (add only if selecting other than standard 10 ft ( 3 m ) length)

/XXX	Specify XXX as desired cable length in feet (specify MXXX for desired cable length in meters)
------	---

### 5) Cable Termination

AY	4-pin plug (Series 3711 & 3741 only)
DZ	Pigtail, stripped and tinned ends (Series 3711 & 3713 only)
HW	9-pin D-sub plug for mating to Model 478A30 signal conditioner (Series 3741 only)
JJ	Pigtail, stripped and tinned ends (Series 3741 only)
LN	8-pin mini DIN for mating to Models 482C27 or 483C28 signal conditioners (Series 3741 only)
LT	8-pin mini DIN for mating to Models 482C27 or 483C28 signal conditioners (Series 3711 only)
SL	BNC plugs for X/Y/Z axis and pigtails leads for Power+, Power-, Sensor Case Ground (Series 3713 only)

### Example

3713F	12	10G	/005	DZ	Triaxial MEMS DC response accelerometer, ± 10 g measurement range, 5 ft (1.5 m) integral cable pigtail
-------	----	-----	------	----	--

# RECOMMENDED ACCESSORIES & SIGNAL CONDITIONERS FOR SERIES 3711, 3713, 3741 AND 3743 MEMS DC RESPONSE ACCELEROMETERS



**Model 010D10 | 034D10 Cable**  
10 ft (3 m)  
4-Socket Plug to 4-Socket Plug



**Model 037P10 | 037G10 Cable**  
10 ft (3m)  
9-Socket Plug to Pigtails



**Model 080A153**  
Triaxial Mounting Block, 3711



**Model 080A152**  
Easy Mount Clip, 3711

## STOCK CABLE DESCRIPTIONS

	English	Metric		English	Metric
Cabling for Single Axis Sensors			Cabling for Triaxial Sensors		
4-Socket Plug to 4-Socket Plug			9-Socket Plug to Pigtails for 3711		
010D05   034D05	5 ft	1.5 m	037P05	5 ft	1.5 m
010D10   034D10	10 ft	3.0 m	037P10	10 ft	3.0 m
010D20   034D20	20 ft	6.1 m	037P20	20 ft	6.1 m
010D30   034D30	30 ft	9.1 m	037P30	30 ft	9.1 m
4-Socket Plug to Pigtails			9-Socket Plug to Three 4-Socket Plugs		
010P05	5 ft	1.5 m	037A10	10 ft	3.0 m
010P10   034A10	10 ft	3.0 m	037A20	20 ft	6.1 m
010P20   034A20	20 ft	6.1 m	037A30	30 ft	9.1 m
010P30	30 ft	9.1 m	9-Socket Plug to Pigtails for 3743		
			037G05	5 ft	1.5 m
			037G10	10 ft	3.0 m
			037G20	20 ft	6.1 m
			037G30	30 ft	9.1 m



**Endevco Model 4418**  
Single channel  
x1, x10, x100 gain  
battery powered



**Model 478B05**  
3-channel  
unity gain  
36 VDC powered  
optional external battery pack



**Model 080A208**  
Triaxial Mounting Block, 3741



**Model 482C27**  
4-channel  
incremental gain  
differential, bridge, and  
ICP® sensor types



**Model 483C28**  
8-channel line-powered  
bridge, differential, and ICP® sensor types