

2


1

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.


REVISIONS		
REV	DESCRIPTION	DIN
E	UPDATED DIMENSIONS	49953


22493


ELECTRICAL CONNECTOR  
10-32 UNF - 2A



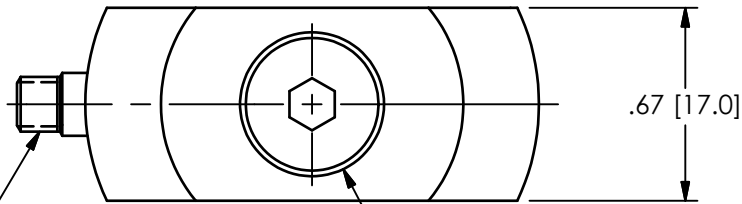



MODEL M081A100:  
M6x1.00-6g X .87 [22.0] LONG  
FLAT HEAD HEX SCREW

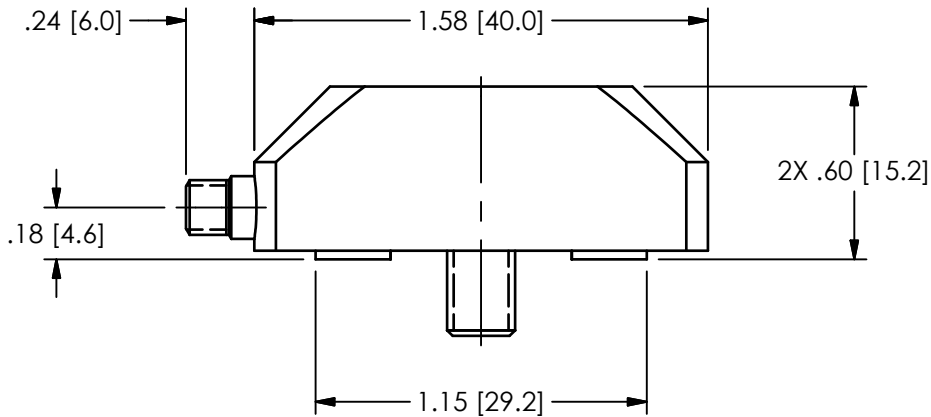

MOUNTING HOLE PREPARATION:  
Ø.199 [5.05]  $\nabla$ .45 [11.4]   
M6x1.00-6H  $\nabla$ .35 [8.9]

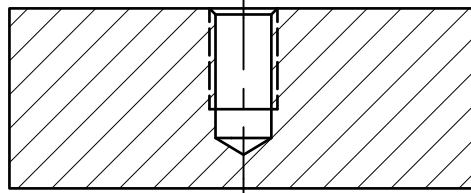

-  TORQUE SCREW TO 86 IN-LBS [10 Nm] MINIMUM
-  MOUNTING SURFACE MUST BE FLAT TO WITHIN .001 [.03] WITH AT LEAST A SURFACE FINISH OF 125 [3.2]
-  DRILL PERPENDICULAR TO MOUNTING SURFACE WITHIN 1°

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		CHECKED		ENGINEER		 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com		
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	NJF	10/01/19	MCK	09/27/17	MJK	09/27/17			
DECIMALS XX ±.01 XXX ±.005	DECIMALS X ± 0.3 XX ± 0.13	TITLE INSTALLATION DRAWING MODEL 240XXX SERIES STRAIN SENSOR							CODE IDENT. NO. 52681	DWG. NO. 22493
ANGLES ± 2 DEGREES	ANGLES ± 2 DEGREES								SCALE: 1.5X	SHEET 1 OF 1
FILLETS AND RADII .003 - .005	FILLETS AND RADII 0.07 - 0.13									

2

1