

	<u>ENGLISH</u>	<u>SI</u>	
Performance			
Sensitivity(± 10 %)	100 mV/g	10.2 mV/(m/s ²)	[2]
Measurement Range	± 50 g	± 490 m/s ²	
Frequency Range(± 3 dB)	48 to 480,000 cpm	0.8 to 8000 Hz	[3][4]
Resonant Frequency	1500 kcpm	25 kHz	[1]
Broadband Resolution(1 to 10 kHz)	150 µg	1472 µm/sec ²	[1]
Non-Linearity	± 1 %	± 1 %	[5]
Transverse Sensitivity	≤ 5 %	≤ 5 %	
Environmental			
Overload Limit(Shock)	5000 g pk	49,050 m/s ² pk	
Temperature Range	-65 to 325 °F	-54 to 162 °C	[1]
Temperature Response	See Graph	See Graph	
Enclosure Rating	IP67	IP67	
Electrical			
Settling Time(within 1% of bias)	≤ 2.0 sec	≤ 2.0 sec	
Discharge Time Constant	≥ 0.2 sec	≥ 0.2 sec	
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	<150 ohm	<150 ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Spectral Noise(10 Hz)	9.0 µg/√Hz	88.3 (µm/sec ²)/√Hz	[1]
Spectral Noise(100 Hz)	4.0 µg/√Hz	39.2 (µm/sec ²)/√Hz	[1]
Spectral Noise(1 kHz)	2.0 µg/√Hz	19.6 (µm/sec ²)/√Hz	[1]
Electrical Isolation	>10 ⁸ ohm	>10 ⁸ ohm	
Physical			
Size (Length x Width x Height)	2.1 in x 1.0 in x 1.0 in	53.3 mm x 25.4 mm x 25.4 mm	
Weight(without cable)	5.4 oz	153 gm	
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 N-m	
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Stainless Steel	Stainless Steel	
Electrical Connector	Integral Armored Cable	Integral Armored Cable	
Electrical Connection Position	Side	Side	
Cable Termination	Blunt cut	Blunt cut	
Electrical Connections(White)	Signal / Power	Signal / Power	
Electrical Connections(Black)	Ground	Ground	
Cable Length	10 ft	3.0 m	
Cable Type	055 2-cond shielded with FEP jacket in 5/16" armor	055 2-cond shielded with FEP jacket in 5/16" armor	

OPTIONAL VERSIONS


Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

M - Metric Mount
Supplied Accessory : Model M081A73 Mounting Bolt M6 x 1.00 (1)

NOTES:

[1] Typical.
[2] Conversion Factor 1g = 9.81 m/s².
[3] The high frequency tolerance is accurate within ±10% of the specified frequency.
[4] 1Hz = 60 cpm (cycles per minute).
[5] Zero-based, least-squares, straight line method.
[6] See PCB Declaration of Conformance PS023 for details.

SUPPLIED ACCESSORIES:
Model 081A73 Captive mounting bolt 1/4-28 x 1.34" (1)

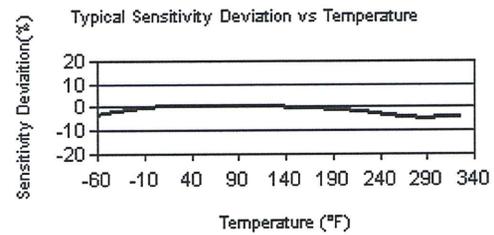

Entered: <i>pmw</i>	Engineer: <i>BJO</i>	Sales: <i>DAC</i>	Approved: <i>BAM</i>	Spec Number:
Date: <i>6/27/11</i>	Date: <i>6/27/11</i>	Date: <i>6/27/11</i>	Date: <i>6/27/11</i>	50107

All specifications are at room temperature unless otherwise specified.
In the interest of constant product improvement, we reserve the right to change specifications without notice.
ICP® is a registered trademark of PCB Group, Inc.

IMI SENSORS
A PCB PIEZOTRONICS DIV.
3425 Walden Avenue, Depew, NY 14043

Phone: 800-959-4464
Fax: 716-684-3823
E-Mail: imi@pcb.com