

Universal Transmitter

Fully Programmable with Current Output, Voltage Output, and Two Relay Outputs

- Provides Loop Power for Two-wire, 4-20 mA Sensors and Transmitters
- Accepts mA, VDC, RTD, TC, Linear Resistance, and Potentiometer Inputs
- Delivers Current and Voltage Output Signals
- Offers Two Set Points with Form A Relay Outputs (2 amp AC, 1 amp DC)
- Fully Programmable via Detachable Pushbutton Display
- Operates from 19.2 to 300 VDC or 21.5 to 253 VAC power

Model 682A06 is a DIN rail mounted, general purpose, universal transmitter for industrial monitoring, control, and alarm requirements. It accepts a variety of sensor input signals and provides excitation voltage for two-wire, loop-powered sensors and transmitters. This unit is especially well-suited for industrial machinery protection and vibration monitoring applications with IMI Sensors' Series 640 loop-powered, 4-20 mA industrial vibration sensors.

Model 682A06 operates as a blind transmitter and delivers VDC, isolated mA, and relay outputs; however, it may be fitted with an optional display module (Model 070A80) to view measurement data. The display module also offers pushbutton programmability of many set-up parameters, including: zero, span, set point threshold, set point hysteresis, and relay action time delay, as well as TC and RTD linearization. The unit also supports password protection for security purposes and memory retention of all set up parameters, to permit common setup of additional transmitters for quick deployment.

As with all PCB® instrumentation, this equipment is complemented with toll-free applications assistance, 24-hour customer service, and is backed by a no-risk policy that guarantees satisfaction or your money refunded.




Model 682A06

Universal Transmitter shown with
Optional Programmable Display Model 070A80



Specifications

Model 682A06		
Performance	English	SI
Channels	1	
Input Signal (Current) (Programmable Ranges)	-1 to +25 mA 0 to +20 mA, +4 to +20 mA	
Input Signal (Voltage) (Programmable Ranges)	-0.020 to +12 VDC 0 to +1 VDC, +0.2 to +1 VDC, 0 to +5 VDC, +1 to +5 VDC, 0 to +10 VDC, +2 to +10 VDC	
Input Signal (Linear Resistance)	0 to 10,000 ohm	
Input Signal (Potentiometer)	10 to 100,000 ohm	
Input Signal (Pt100 RTD) (Ni100 RTD)	-328 to +1562 °F -328 to +1562 °F	-200 to +850 °C -60 to +250 °C
Input Signal (Type K TC) ⁽¹⁾	-292 to +2501 °F -180 to 1372 °C	
Output Signal (Current Range (span)) (Programmable Ranges)	0 to +20 mA 0 to +20 mA, +20 to 0 mA, +4 to +20 mA, +20 to +4 mA	
Output Signal (Voltage Range) (Programmable Ranges)	0 to +10 VDC 0 to +1 VDC, +1 to 0 VDC, +0.2 to +1 VDC, +1 to +0.2 VDC 0 to +5 VDC, +5 to 0 VDC, +1 to +5 VDC, +5 to +1 VDC, 0 to +10 VDC, +10 to 0 VDC, +2 to +10 VDC, +10 to +2 VDC	
Output Relays (2 Provided)	Form A type with 250 V rms, 2 amp AC or 1 amp DC capacity	
Relay Function (Programmable)	Setpoint, Window, Sensor Error, Power ON, Power OFF	
Relay Time Delay (Programmable)	0 to 3600 sec	
Relay Hysteresis (Programmable)	0.1 to 25 % of selected span	
Display (Accessory Model 070A80)	4 digits	
Environmental		
Temperature Range (Operating)	-4 to +140 °F	-20 to +60 °C
Humidity Range (Non-condensing)	<95%	
Enclosure Rating (Housing / Terminals)	IP50 / IP20	
Electrical		
Power Required	21.6 to 253 VAC, 50 to 60 Hz or +19.2 to +300 VDC	
Excitation Power (for Loop Powered Device)	16 to 20 VDC (0-20 mA)	
Physical		
Mounting	DIN rail	
Size (approximate) (H x W x D) (With Attached 070A80 Display)	4.3 x 0.9 x 4.1 inch 4.3 x 0.9 x 4.6 inch	109 x 23.5 x 104 mm 109 x 23.5 x 116 mm
Weight	170 gm (185 gm with Model 070A80)	

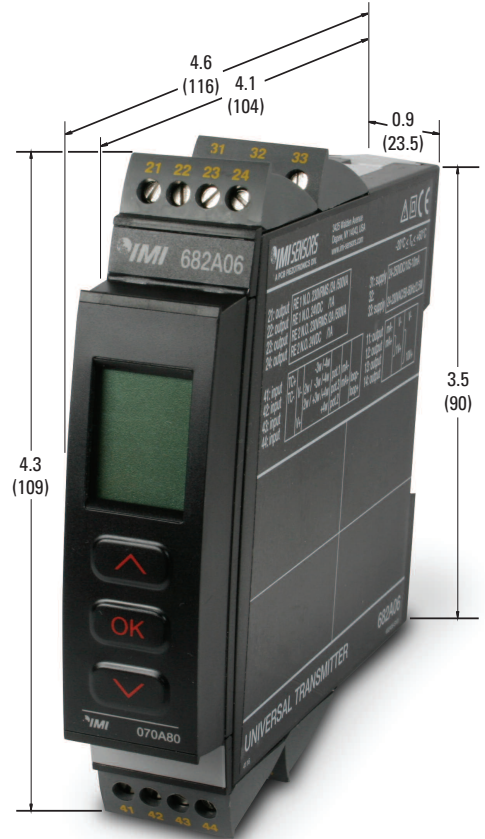

Model 682A06
Universal Transmitter
Shown with attached Model 070A80 Accessory Display
Dimensions shown are in inches (millimeters)

Notes: [1] Contact factory for details about other thermocouple types

CE This product conforms to applicable European Directives for CE marking.



3425 Walden Avenue, Depew, NY 14043-2495 USA
IMI Sensors Division toll free 800-959-4464
24-hour SensorLineSM 716-684-0003
Fax 716-684-3823 E-mail imi@pcb.com
Web site www.imi-sensors.com

ISO 9001:2000 CERTIFIED A2LA ACCREDITED to ISO 17025

© 2007 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice.
 PCB, IMI with associated logo, ICP, Swiveler, and Spindler are registered trademarks of PCB Group, Inc.
 SensorLine is a service mark of PCB Group, Inc. All other trademarks are properties of their respective owners.

The IMI Sensors Division of PCB® Piezotronics, Inc. specializes in the development, application, and support of industrial vibration sensors, switches, transmitters, meters, and accessories for machinery condition monitoring and predictive maintenance requirements. This product focus, coupled with the strengths and resources of PCB, permits the IMI Sensors Division to offer exceptional customer service, 24-hour technical assistance, and a **Total Customer Satisfaction** guarantee.

Visit www.imi-sensors.com to locate your nearest sales office