



MODEL 132B38

## MICRO ICP<sup>®</sup> PRESSURE SENSOR




- Small size fits in wind tunnel models
- Very high frequency response
- Centered element improves accuracy

### TYPICAL APPLICATIONS

- Explosives research
- Time of arrival measurements
- Targeting
- Wind tunnel boundary layer transition

For measurement of short wavelength pressure pulses, 132B38 piezoelectric ICP<sup>®</sup> micro pressure sensor features 0.5 microsecond response. The sensor's micro-second response time accurately measures pressure peaks from fast rising shock waves and very high frequency pressure phenomena. The 1mm diameter sensing element allows measurement of short wavelength incident pressure waves. A short time constant filters off the static component of wind tunnel pressure, allowing differentiation of consecutive pulses.

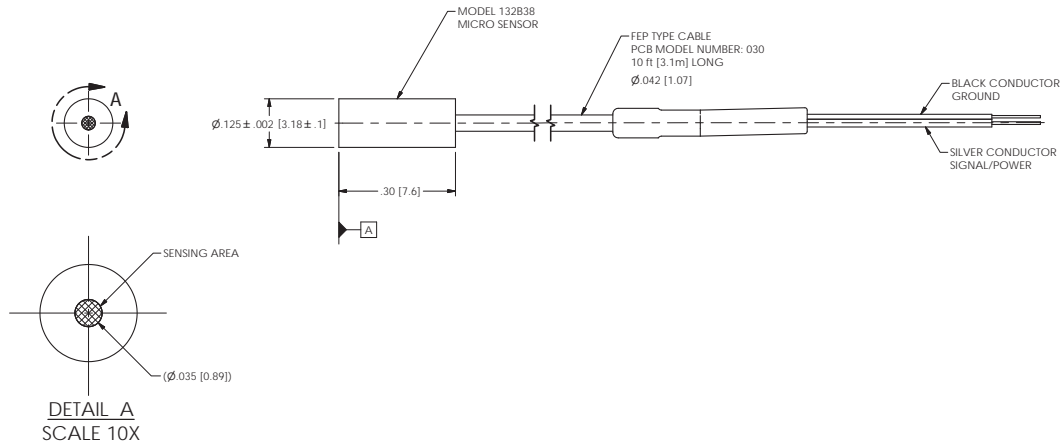

SPECIFICATIONS		
	English	SI
<b>Performance</b>		
Measurement Range	50 psi	345 kPa
Sensitivity (±30%)	140 mV/μE	20.3 mV/μE
Maximum Pressure (Dynamic)	800 psi	5516 kPa
Resolution [2]	0.5-100000 Hz	0.5-100000 Hz
Rise Time (Incident) [1]	0.6 nE	5.0 nE
Rise Time (Reflected)	≤1 %	≤1.5 %
Low Frequency Response (-5 %)	≤5 %	≤5 %
High Frequency Response [3][2]	1 MHz	1 MHz
<b>Environmental</b>		
Temperature Range (Operating)	-13 to +175 °F	-25 to +79 °C
<b>Electrical</b>		
Output Polarity (Positive Pressure)	Positive	
Discharge Time Constant (at room temp) [4]	≥.000045 sec	
Excitation Voltage	20 to 30 VDC	
Constant Current Excitation	2 to 20 mA	
Output Impedance	≤100 Ohm	
Output Bias Voltage	8 to 14 VDC	
<b>Physical</b>		
Sensing Element	Ceramic	
Housing Material	Stainless Steel	
Sealing	Epoxy	
Weight [5]	12.77 gm	
Cable Termination	10-32 Coaxial Jack	
Cable Type	030 Coaxial	

All specifications are at room temperature unless otherwise specified.

## Product Notes

- [1] Rise time in air at Mach 1.
- [2] Typical.
- [3] High frequency response may be limited by supply current and output cable length.
- [4] Calculated.
- [5] Typical; with cable.



3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in the USA: 800 828 8840

Phone: 1 716 684 0001 | Email: info@pcb.com

PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLineSM, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit [www.pcb.com](http://www.pcb.com) for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at [www.mts.com](http://www.mts.com).

© 2019 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLineSM is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States.

AD-132B38-0319



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.