



Hand Torque-Angle Wrenches

Highlights

- Durable, ergonomic design
- Lightweight, high-strength
- Excellent overall accuracy
- High resolution angle measurement
- Compatible with most strain gage instruments and data collectors
- Wide range of torque capabilities
- Comfortable foam handle

Applications

- Post Assembly Torque Auditing
- Torque-Angle Signature Analysis
- Bolted Joint Troubleshooting



PCB Load & Torque Division's RS Technologies Series HTA7000 Hand Torque-Angle Wrenches are rugged and lightweight, yet durable enough to be used in the toughest industrial environments, and the narrowed head is ideal for access when space is at a premium. With high-resolution angle measurement, these wrenches are ideal for troubleshooting bolted joints and torque-angle audits using Torque Angle Signature Analysis techniques as well as employing the M-Alpha Audit Method patented by RS Technologies. Equipped with an ID chip, setup and calibration is quick and easy when used with instruments from RS Technologies, such as the Model 962 Portable Data Recorder and the Model 920 Portable Digital Transducer Instrument.

RS Technologies provides calibration services for this and their other torque and force products at its A2LA Accredited Calibration Laboratory in Farmington Hills, Michigan.

As with all PCB® instrumentation, these products are complemented with toll-free applications assistance, 24-hour service, and are backed by a no-risk policy that guarantees total customer satisfaction or your money refunded.






Series HTA7000 Hand Torque-Angle Wrenches

Common Specifications

Output at Rated Capacity	2 mV/V $\leq 0.25\%$ FS
Shunt Calibration	2 mV/V with 43.575 kOhm Precision Resistor
Interchangeability	Matched for mV/V and Shunt Calibration $\leq 0.3\%$ FS
Overload Capacity	150% FS
Non-linearity	$\leq 0.25\%$ FS
Hysteresis	$\leq 0.25\%$ FS
Excitation Voltage	10 VDC Maximum
Bridge Resistance	350 Ohm Ω
Operating Temperature Range	+70 to +150 °F +21 to +66 °C
Useable Temperature Range	0 to +200 °F -18 to +93 °C
Temperature Effect on Zero	$\pm 0.01\%$ FS/°F $\pm 0.018\%$ FS/°C
Temperature Effect on Output	$\pm 0.001\%$ Reading/°F $\pm 0.0018\%$ Reading/°C
Connector	PT02H-12-10P

Recommended Accessories

Model 920 Portable Digital Transducer Instrument	080920-01000
Model 962 Portable Data Recorder	080962-01000
Cable Assembly, 10' Coiled, PT to DB15 Male	097000-34445
Mating Connector, Standard	4242R-000630 PT06A-12-105 (SR)

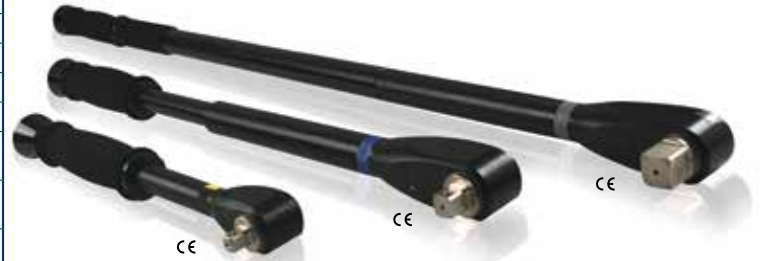

Model No.	Capacity	Drive Size	Length	Weight
027125-07012	100 lbf-in (11 Nm)	¼-inch Square	8 in (203 mm)	11.2 oz (318 gm)
027137-07022	200 lbf-in (23 Nm)	⅜-inch Square	12 in (305 mm)	12.8 oz (363 gm)
027137-07051	50 lbf-ft (68 Nm)	⅜-inch Square	12 in (305 mm)	12.8 oz (363 gm)
027250-07101	100 lbf-ft (136 Nm)	½-inch Square	21 in (540 mm)	1.8 lb (816 gm)
027250-07201	200 lbf-ft (271 Nm)	½-inch Square	21 in (540 mm)	1.8 lb (816 gm)
027250-07301	300 lbf-ft (407 Nm)	½-inch Square	28 in (711 mm)	3.2 lb (1.5 kg)
027375-07501	500 lbf-ft (678 Nm)	¾-inch Square	44 in (1118 mm)	6.5 lb (3.0 kg)

PCB's Line of Fastener Test Products (formerly the RS Technologies product line) includes test systems and threaded fastener torque/angle/tension systems ideal for use in the Automotive, Aerospace & Defense, Power Generation industries, and for product assembly by manufacturers or processors of threaded fasteners or other companies that use threaded fasteners to assemble their products. For more information, please visit www.pcb.com

The Global Leader in Sensors and Instrumentation For All Your Applications



Toll-Free in USA 800-828-8840
E-mail info@pcb.com



Toll-Free in USA 800-959-4464
E-mail imi@pcb.com



Toll-Free in USA 888-258-3222
E-mail sales@larsondavis.com



Toll-Free in USA 800-860-4867
E-mail info@modalshop.com



24350 Indoplex Circle, Farmington Hills, MI 48335 USA

Toll-Free in USA 866-684-7107

24-hour SensorLineSM 716-684-0001

Fax 248-888-8266 E-mail ltinfo@pcb.com

Website www.pcb.com

ISO 9001 CERTIFIED ■ A2LA ACCREDITED to ISO 17025

© 2014 PCB Group, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, ICP, Modally Tuned, Spindler, Swiveler and TORKDISC are registered trademarks of PCB Group. SoundTrack LXT, Spark and Blaze are registered trademarks of PCB Piezotronics. SensorLine is a service mark of PCB Group. All other trademarks are property of their respective owners.

LT-RS-TorqueAngleWrenches-0914

Printed in U.S.A.



Visit www.pcb.com to locate
your nearest sales office