



# AEROSPACE FLIGHT TEST

---

 **PCB PIEZOTRONICS**  
AN AMPHENOL COMPANY

 **ENDEVCO**  
AN AMPHENOL COMPANY

[pcb.com](http://pcb.com) | [endevco.com](http://endevco.com)



## SENSORS FOR FLIGHT TESTING

PCB Piezotronics' portfolio of cutting-edge sensors is meticulously crafted to meet and exceed the exacting requirements of flight testing. Built for high precision in complex setups, the accelerometers, dynamic force sensors, and force transducers contained in this catalog have been carefully engineered for a range of critical test types.

PCB's Endevco product line extends our offering to provide advanced measurement devices proven to withstand the challenges of extreme environments, including cryogenic sensors. Building upon a foundation of two of the world's most diverse sensor and related electronics product lines, the models in this catalog support the following applications:

- Flutter testing of airframes
- Turbulent airflow measurements
- Engine testing
- Vibroacoustic testing
- Vehicle dynamics studies
- Missile and rocket launches
- Structural vibration tests

Additionally, you will find an assortment of acoustic measurement products and accessories, including condenser, prepolarized, externally polarized, array, probe, low-profile surface, and special purpose microphones.

Complementing PCB's sensor line is signal conditioning specifically designed for aerospace vehicle power availability, severe vibration environments, challenging EMI conditions, constrained space requirements, and the temperature extremes encountered in flight testing.

Because of the complexity of flight testing and breadth of PCB's product line, this catalog includes only the most popular subset of PCB's flight test sensors and signal conditioners. PCB also manufactures aerospace and defense sensors for other applications, such as aerospace vehicle ground testing, environmental testing, Health and Usage Monitoring (HUMS), fuze/safe and arm, and blast testing.

For a complete exploration of other options, including customized solutions, we invite inquiries to PCB's application engineering team. Our longstanding commitment to Total Customer Satisfaction extends to the willingness to devote engineering and manufacturing resources to meet your unique and challenging requirements.

## SINGLE AXIS, PIEZOELECTRIC ACCELEROMETERS FOR VIBRATION AND MEASUREMENT

PCB® offers various types of accelerometers to suit all applications

The teardrop accelerometers are very small and lightweight. This design exhibits minimum mass loading effects and installs adhesively into tight locations.

The through hole or ring-type configurations install conveniently with a through bolt which may be rotated to achieve desired location of electrical connection. Ring-type accelerometers are also low profile, allowing installation in tight areas.

CE



### SINGLE AXIS, PIEZOELECTRIC ACCELEROMETER

MODEL 352C23

Sensitivity: 5 mV/g

Measurement Range:  $\pm 1000$  g pk

Frequency Range ( $\pm 10\%$ ):  
1.5 Hz to 15k Hz

CE



### SINGLE AXIS, PIEZOELECTRIC ACCELEROMETER

MODEL 352C22

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g pk

Frequency Range ( $\pm 10\%$ ):  
0.7 Hz to 13k Hz

CE



### SINGLE AXIS, PIEZOELECTRIC ACCELEROMETER

MODEL 352A24

Sensitivity: 100 mV/g

Measurement Range:  $\pm 50$  g pk

Frequency Range ( $\pm 10\%$ ):  
0.8 Hz to 10k Hz

CE



### SINGLE AXIS, PIEZOELECTRIC ACCELEROMETER

MODEL 353B15

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g pk

Frequency Range ( $\pm 10\%$ ):  
0.7 Hz to 18k Hz

CE



### SINGLE AXIS, PIEZOELECTRIC ACCELEROMETER

MODEL 353B15

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g pk

Frequency Range ( $\pm 10\%$ ):  
0.7 Hz to 18k Hz

CE



### SINGLE AXIS, PIEZOELECTRIC ACCELEROMETER

MODEL 355B03

Sensitivity: 100 mV/g

Measurement Range:  $\pm 50$  g pk

Frequency Range ( $\pm 10\%$ ):  
0.6 Hz to 12k Hz

CE



### RING-STYLE ICP® ACCELEROMETER

MODEL 355A40

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g

Frequency Range ( $\pm 5\%$ ):  
1 to 20000 Hz

CE



### MINIATURE RING-STYLE ICP® ACCELEROMETER

MODEL 355A44

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g

Frequency Range ( $\pm 5\%$ ):  
1 to 5500 Hz

This is a small sample of PCB's ICP® accelerometer offering; for our full offering, please refer to PCB's Test & Measurement catalog or [www.pcb.com](http://www.pcb.com)

## TRIAXIAL, PIEZOELECTRIC ACCELEROMETERS FOR VIBRATION MEASUREMENT

PCB® offers triaxial accelerometers in a large range of sizes.

Miniature triaxial accelerometers are especially well-suited for applications demanding high frequency range, small size and light weight.

High temperature, charge output, triaxial accelerometers (found on page 6) deliver high-impedance measurement signals directly from their piezoelectric sensing elements. No internal circuitry is used, which permits operation to extreme temperatures.

Triaxial accelerometers, used for structural analysis, are constructed of aluminum or titanium for the lowest mass, and exhibit excellent phase response and measurement resolution.



### TRIAXIAL, PIEZOELECTRIC ACCELEROMETER

MODEL 356A01

Sensitivity: 5 mV/g

Measurement Range:  $\pm 1000$  g

Frequency Range ( $\pm 5\%$ ): 1 to 5k Hz



### TRIAXIAL, PIEZOELECTRIC ACCELEROMETER

MODEL 356A06

Sensitivity: 5 mV/g

Measurement Range:  $\pm 1000$  g

Frequency Range ( $\pm 5\%$ ):  
2 to 8k Hz (y, z axis), 8k Hz (x-axis)



### TRIAXIAL, PIEZOELECTRIC ACCELEROMETER

MODEL 356A19

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g

Frequency Range ( $\pm 5\%$ ):  
1 to 13k Hz



### TRIAXIAL, PIEZOELECTRIC ACCELEROMETER

MODEL 354C10

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g

Frequency Range ( $\pm 5\%$ ): 2 to 8k Hz



### TRIAXIAL, PIEZOELECTRIC ACCELEROMETER

MODEL 354B04

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g

Frequency Range ( $\pm 5\%$ ): 0.6 to 10k Hz



### TRIAXIAL, PIEZOELECTRIC ACCELEROMETER

MODEL 356A15

Sensitivity: 100 mV/g

Measurement Range:  $\pm 50$  g

Frequency Range ( $\pm 5\%$ ): 2 to 5k Hz



### ISOTRON® ACCELEROMETER

ENDEVCO MODEL 65HTLPF

Sensitivity: 10 mV/g

Measurement Range:  $\pm 500$  g pk

Frequency Range ( $\pm 5\%$ ): 1k/5k Hz

## HIGH TEMPERATURE ACCELEROMETERS

Many operating engine environments generate temperatures in excess of 550 °F (288 °C). Above this temperature, many of the design features and materials used in high temperature accelerometers change considerably.

For 550 °F to 1400 °F (288 °C to 760 °C) operating environments, we offer a range of both single ended (measurement output as a signal and ground) and differential (measurement output as a plus and minus signal) sensors. The former tend to be smaller and more suitable for short-term testing needs, while the latter are more appropriate for long-term monitoring applications.

Obviously, the environments in which these sensors operate are challenging. In fact, in some of the highest temperature operating environments, the operating sensor measures vibration signatures while glowing red hot!

These sensors are complemented by both lab-grade and in-line charge amplifier systems. This differential charge amplifier is suitable for interfacing to any of PCB's differential charge output accelerometers.

The accelerometers and charge amplifiers summarized here are only a small subset of the available sensors that are on our web site. Of course, custom designed accelerometers are always available.

This is a small sample of PCB's high temperature offering. For more please see our HUMS and Gas Turbine brochures, or visit PCB.com.



### MODAL TRIAXIAL ACCELEROMETER

ENDEVCO MODEL 2220E

Sensitivity: 3 pC/g  
 Measurement Range: ±1000 g pk  
 Frequency Range (±5%): 10k Hz  
 Temperature Range: -67 to 500°F  
 (-55 to 260°C)



### CHARGE OUTPUT ACCELEROMETER

MODEL 357B69

Sensitivity: 3.5 pC/g  
 Measurement Range: ±500 g  
 Frequency Range (±5%): 6k Hz  
 Temperature Range: -65 to 900°F  
 (-54 to 482°C)



### SMALL CHARGE OUTPUT ACCELEROMETER

MODEL 357A67

Sensitivity: 3 pC/g  
 Measurement Range: ±1k g  
 Frequency Range (±10%): 10k Hz  
 Temperature Range: -76 to 392°F  
 (-60 to 200°C)



### CHARGE OUTPUT ACCELEROMETER

MODEL 356A71

Sensitivity: 10 pC/g  
 Measurement Range: ±500 g  
 Frequency Range (±5%): 5k Hz  
 Temperature Range: -95 to 490°F  
 (-70 to 254°C)



### DIFFERENTIAL OUTPUT ACCELEROMETER

MODEL 357C71, 357C72, & 357C73

Sensitivity: 10, 50, 100 pC/g  
 Measurement Range: ±1000, ±500, ±300 g  
 Frequency Range (±5%): 4k, 2.5k, 2k Hz  
 Temperature Range: -65 to 900°F  
 (-54 to 482°C)



### DIFFERENTIAL PIEZOELECTRIC ACCELEROMETER

ENDEVCO MODEL 6222S-20A, 6222S-50A, & 6222S-100A

Sensitivity: 20 / 50 / 100 pC/g  
 Measurement Range: ±2000 / 1000 / 500 g pk  
 Frequency Range (±5%): 9k / 6k / 6k Hz  
 Temperature Range: -65 to 500°F  
 (-54 to 260°C)

## LOW THERMAL COEFFICIENT ACCELEROMETERS

High and low temperature extremes and thermal transients can play havoc with the quality of your data. Piezoelectric crystals are required for accurate and efficient dynamic measurements at temperature extremes, and during fast thermal gradients often exhibit undesired spiking phenomena. PCB® has developed a family of accelerometers employing new crystal designs and processes pioneered at PCB®, to minimize and eliminate this effect.



### ICP® ACCELEROMETER

MODEL 320C03

Sensitivity:  $\pm 500$  g pk  
 Measurement Range: 10 mV/g  
 Frequency Range ( $\pm 5\%$ ): 1 to 6k Hz



### ICP® ACCELEROMETER

MODEL 320C52

Sensitivity:  $\pm 500$  g pk  
 Measurement Range: 10 mV/g  
 Frequency Range ( $\pm 5\%$ ): 1 to 10k Hz



### ICP® ACCELEROMETER

MODEL 320C53

Sensitivity:  $\pm 5000$  g pk  
 Measurement Range: 1 mV/g  
 Frequency Range ( $\pm 5\%$ ): 1 to 5k Hz



### UHT-12™, ICP® TRIAXIAL ACCELEROMETER

MODEL 339A30

Sensitivity:  $\pm 500$  g pk  
 Measurement Range: 10 mV/g  
 Frequency Range ( $\pm 5\%$ ): 2 to 8k Hz



### UHT-12™, ICP® TRIAXIAL ACCELEROMETER

MODEL HT339C31

Sensitivity:  $\pm 500$  g pk  
 Measurement Range: 10 mV/g  
 Frequency Range ( $\pm 5\%$ ): 2 to 8k Hz



### UHT-12™, ICP® TRIAXIAL ACCELEROMETER

MODEL 339B32

Sensitivity:  $\pm 500$  g pk  
 Measurement Range: 10 mV/g  
 Frequency Range ( $\pm 5\%$ ): 2 to 10k Hz



### UHT-12™, ICP® TRIAXIAL ACCELEROMETER

MODEL TLD339A34

Sensitivity:  $\pm 100$  g pk  
 Measurement Range: 50 mV/g  
 Frequency Range ( $\pm 5\%$ ): 2 to 5k Hz



### UHT-12™, ICP® TRIAXIAL ACCELEROMETER

MODEL TLD339A36


Sensitivity:  $\pm 500$  g pk  
 Measurement Range: 10 mV/g  
 Frequency Range ( $\pm 5\%$ ): 2 to 5k Hz




### UHT-12™, ICP® TRIAXIAL ACCELEROMETER

MODEL TLD339A37

Sensitivity:  $\pm 50$  g pk  
 Measurement Range: 100 mV/g  
 Frequency Range ( $\pm 5\%$ ): 0.3 to 4k Hz

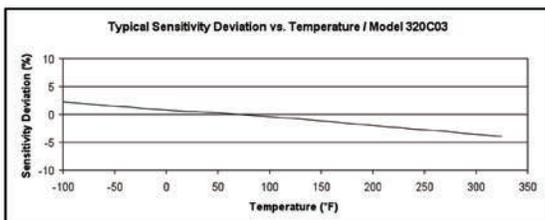

Model 320C03

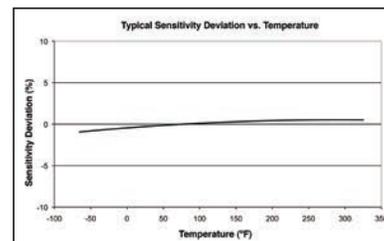

Series 339A

## VC MEMS ACCELEROMETERS

PCB® series 3711F, 3713F, 3741F, 3743G and Endevco 7290G variable capacitance MEMS (VC MEMS) accelerometers are used to measure low frequency motion down to zero hertz. These accelerometers are used in flight testing applications with low frequency and amplitude requirements. Each series includes a full scale measurement range from  $\pm 2g$  to  $\pm 200g$  and features low spectral noise with high resolution. DC response sensors feature silicon MEMS sensing elements for uniform, repeatable performance and high frequency overload protection.

The rugged and durable series 3711 & 3713 VC MEMS accelerometers are hermetically sealed in a robust titanium housing allowing for a very stable and accurate measurement in the most severe operating environments. In addition, this series is inherently insensitive to base strain and transverse acceleration effects. Supply voltage regulation permits operation from +5 to +28 VDC and the single-ended, low-noise, low-impedance output signal may be transmitted over long cable lengths without degradation.

The precision series 3741 and 3743 VC MEMS accelerometers sensors offer a differential output signal for common-mode noise rejection and incorporate many advanced features. This includes supply voltage regulation and temperature compensation for superior performance over the entire operational temperature range. The 3741 features a low profile and lightweight hard-anodized aluminum housing with an integral, 4-conductor shielded cable. The 3743 features a rugged, hermetic stainless steel package with an integral M8x1 8-pin connector or an integral cable rated to IP67 for stable performance in extreme measurement environments.

Endevco 7290G series has a long history of serving the flight test application. Known for its reliability and repeatability, it also features a fast recovery time when exposed to an over-range.



### SINGLE-ENDED VC MEMS ACCELEROMETER

SERIES 3711F

Hermetically sealed titanium housing with 4-pin integral connector

Frequency response from 0 up to 1500 Hz ( $\pm 5\%$ )

Screw mount



### SINGLE-ENDED TRIAXIAL VC MEMS ACCELEROMETER

SERIES 3713F

Hermetically sealed titanium housing with 9-pin integral connector

Frequency response from 0 up to 1500 Hz ( $\pm 5\%$ )

10-32 threads for stud mount



### DIFFERENTIAL VC MEMS ACCELEROMETER

SERIES 3741F

Anodized aluminum housing with integral 4-conductor shielded cable

Frequency response from 0 up to 1500 Hz ( $\pm 5\%$ )

Screw mount



### DIFFERENTIAL TRIAXIAL VC MEMS ACCELEROMETER

SERIES 3743G11

Hermetically sealed stainless steel housing with M8x1 8-pin integral connector

Frequency response from 0 up to 1500 Hz ( $\pm 5\%$ )

Screw mount



### DIFFERENTIAL VC MEMS ACCELEROMETER

ENDEVCO 7290G & 7290GM5

Anodized aluminum housing with integral 4-conductor shielded cable

Frequency response from 0 up to 2000 Hz ( $\pm 5\%$ )

M5 option for IP67 humidity protection



### DIFFERENTIAL TRIAXIAL VC MEMS ACCELEROMETER

SERIES 3743G12

Stainless steel housing with integral cable rated to IP67

Frequency response from 0 up to 1500 Hz ( $\pm 5\%$ )

Screw mount



## MICROPHONES

PCB and Endevco offer a variety of acoustic measurement products, including condenser, modern prepolarized, traditional externally polarized, array, probe, low-profile surface, and special-purpose microphones. Microphone products are complemented by an assortment of preamplifiers, signal conditioners, A-weighting filters, handheld calibrators, and accessories. A large number of established aerospace, military and defense, automotive, universities, OEM's, consultants, and white goods (appliance manufacturers have trusted their test requirements to PCB.

The following selection is an example of our wide range of acoustic sensors and accessories.



### PREPOLARIZED (0V) PRECISION FREE-FIELD CONDENSER MICROPHONE

MODEL 377C01

Nominal Microphone Diameter: 1/4"  
 Frequency Range: 3 Hz to 80 kHz  
 Dynamic Range: 165 dB re 20  $\mu$ Pa



### PREPOLARIZED (0V) PRECISION PRESSURE CONDENSER MICROPHONE

MODEL 377A12

Nominal Microphone Diameter: 1/4"  
 Frequency Range: 4 Hz to 20k Hz  
 Dynamic Range: 182 dB re 20  $\mu$ Pa



### PREPOLARIZED (0V) PRECISION FREE-FIELD CONDENSER MICROPHONE

MODEL 377B02

Nominal Microphone Diameter: 1/2"  
 Frequency Range: 3.15 Hz to 20 kHz  
 Inherent Noise: 15 dBA



### PREPOLARIZED (0V) PRECISION RANDOM INCIDENCE CONDENSER MICROPHONE

MODEL 377C20

Nominal Microphone Diameter: 1/2"  
 Frequency Range: 3.15 Hz to 16 kHz  
 Dynamic Range: 146 dB re 20  $\mu$ Pa



### ICP® LOW NOISE (0V) PRECISION FREE-FIELD MICROPHONE SYSTEM

MODEL 378A04

Nominal Microphone Diameter: 1/2"  
 Frequency Range: 10 Hz to 16 kHz  
 Inherent Noise: 5.5 dBA



### EXTERNALLY-POLARIZED (200V) PRECISION FREE-FIELD CONDENSER MICROPHONE

MODEL 2540

Nominal Microphone Diameter: 1/2"  
 Frequency Range: 4 Hz to 40k Hz  
 Dynamic Range: 160 dB re 20  $\mu$ Pa



## MODERN PREPOLARIZED AND TRADITIONAL, EXTERNALLY-POLARIZED PRECISION CONDENSER MICROPHONES

A wide variety of traditional, externally-polarized and modern prepolarized free-field, pressure, and random incidence precision condenser microphones are available from PCB. Externally-polarized models operate from a 200 V power source, while prepolarized models can operate from low cost, constant current (2 to 20 mA) ICP® signal conditioners. Prepolarized microphones can be interchanged with similar ICP accelerometer set-ups, allowing tests and measurements with same data acquisition system. Furthermore, they show excellent performance suitable for aerospace and defense dedicated testing.

- Proven rugged design
- Exceptional performance in high humidity
- Individually tested for performance
- Meet IEC and ANSI standards
- Can be utilized in Type 1 systems
- Operate from ICP sensor power (prepolarized)

CE



### HIGH TEMPERATURE, 1/2" ICP® PREAMPLIFIER

MODEL HT426E01

CE



### 1/4" ICP® PREAMPLIFIER

MODEL 426B03

CE



### 1/2" ICP® PREAMPLIFIER

MODEL 426E01

CE



### 1/2" 200V PREAMPLIFIER

MODEL 426A30



### 1/2" 48V PREAMPLIFIER

MODEL 426A14



CE



**ICP® ARRAY MICROPHONES WITH INTEGRAL PREAMPLIFIER**

MODELS 130F20, 130F21, 130F22

- Microphone Diameter: 1/4"
- Sensitivity: 45 mV/Pa
- Dynamic range: 24 dBA to 122 dB
- Free-Field response
- BNC, 10-32, SMB connectors

CE



**ICP® ELECTRET SURFACE MICROPHONE**

MODEL 130B40

- Low profile: 1/8" height
- Sensitivity: 8.5 mV/Pa
- Dynamic Range: 150 dB re 20  $\mu$ Pa
- Integral Cable



**ICP® ARRAY MICROPHONES WITH INTEGRAL PREAMPLIFIER**

MODEL 130A23

- Microphone Diameter: 1/4"
- Sensitivity: 14 mV/Pa
- Dynamic Range: 30 dBA to 143 dB
- Free-field response
- SMB connector

**MICROPHONE PREAMPLIFIER POWER SUPPLY**

MODEL 480A25

- 0 and 200 volt polarization voltage
- Extended battery life (40 hours)
- 0, 20, and 40 dB gain
- Selectable flat (Z), A, and C-weighting



**MICROPHONE CALIBRATORS**



**Model CAL200**  
Acoustic Calibrator

**Model CAL250**  
Acoustic Calibrator




**SERIES 103B - ICP® HIGH-INTENSITY,  
SOUND PRESSURE SENSORS**

PCB Series 103B has played a major role in the development of supersonic aircraft and rockets. This tiny instrument is also useful for measuring transient pressure events, air turbulence, and other such acoustic phenomena on structures or aerodynamic models.

Capable of high-intensity sound measurement of 191 dB with 86 dB resolution

Acceleration compensated, ceramic element virtually eliminates vibration sensitivity

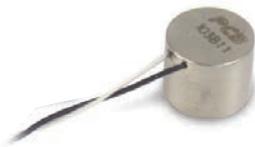

**ICP® HIGH-INTENSITY,  
SOUND PRESSURE SENSOR**

MODEL 103B01 & 103B11

Measurement Range: 3.3 / 10 psi

Sensitivity: 1500 / 500 mV/psi

Resonant Frequency:  $\geq$  13k Hz

CE



**ICP® HIGH-INTENSITY,  
SOUND PRESSURE SENSOR**

MODEL 103B02 & 103B12

Measurement Range: 3.3 / 10 psi

Sensitivity: 1500 / 500 mV/psi

Resonant Frequency:  $\geq$  13k Hz

## SERIES 106B - ICP® FOR HIGH INTENSITY, ACOUSTIC PRESSURE SENSORS

Model 106B and 106B50 are high sensitivity, acceleration-compensated, ICP® quartz pressure sensors suitable for measuring intense acoustic phenomena. In fact, the series is widely used for measuring acoustic fields in operating launch vehicles and their associated payloads. The Series 106 family range spans from acoustic pressures of less than 80 dB to several psi. Similar piezoelectric technology is employed in PCB's complete range of hermetically sealed dynamic pressure sensors. These products measure pressure fluctuations from acoustic levels to tens of thousands of psi and frequencies from nearly DC to tens of kHz. Their ability to measure only pressure fluctuations above a specified frequency imposed on large static pressure fields makes them uniquely suited for such applications as combustion instability monitoring.



### ICP® HIGH-INTENSITY, SOUND PRESSURE SENSOR

MODEL 106B52

Measurement Range ( $\pm 2$  V output):  
1 psi  
Sensitivity: 5000 mV/psi  
Resonant Frequency:  $\geq 40$  kHz



### ICP® HIGH-INTENSITY, SOUND PRESSURE SENSOR

MODEL 106B50

Measurement Range ( $\pm 2$  V output):  
5 psi  
Sensitivity: 500 mV/psi  
Resonant Frequency:  $\geq 40$  kHz



### ICP® HIGH-INTENSITY, SOUND PRESSURE SENSOR

MODEL 106B

Measurement Range ( $\pm 2$  V output):  
8.3 psi  
Sensitivity: 300 mV/psi  
Resonant Frequency:  $\geq 60$  kHz

## PIEZOELECTRIC MICROPHONES

Measuring high intensity acoustic noise and very low pressure fluctuations in harsh environments, piezoelectric microphones use either quartz or manmade ceramic elements. They are designed for a wide range of environmental conditions including insensitivity to altitude changes, and vibration compensation is incorporated into the sensing element. They are self-generating devices that require no external power source for operation. These pressure sensors are useful for measuring transient pressure events, air turbulence, and other such acoustic phenomena on aircraft structures, rockets, or aerodynamic models.

CE



### PIEZOELECTRIC MICROPHONE

ENDEVCO MODEL 2510

Measurement Range: 100 to  $>180$  (dB SPL)  
Sensitivity: 31 pC rms @ 140 dB SPL  
Resonant Frequency: 30 kHz  
Bracket mount

CE



### PIEZOELECTRIC MICROPHONE

ENDEVCO MODEL 2510M4A

Measurement Range: 100 to  $>180$  (dB SPL)  
Sensitivity: 31 pC rms @ 140 dB SPL  
Resonant Frequency: 30 kHz  
Flush mount

CE



### ICP® HIGH-INTENSITY, SOUND PRESSURE SENSOR

MODEL 116B

Measurement Range: 100 psi  
Sensitivity: 6 pC/psi  
Resonant Frequency:  $\geq 55$  kHz

## DYNAMIC ICP® PRESSURE SENSORS

For measurement of short wavelength pressure pulses, micro ICP® pressure sensors feature micro-second response time that accurately measure pressure peaks from fast rising shock waves and very high frequency pressure phenomena. Miniature high sensitivity ICP® probes are used to measure small dynamic pressures such as turbulence, noise, sound, and pulsations, especially in adverse environments. They measure dynamic pressure, but with very high resolution.

CE



### HIGH RESOLUTION ICP® PRESSURE PROBE WITH CLAMP NUT

MODEL 112A22

Measurement Range: 50 psi  
Sensitivity: 100 mV/psi  
Resonant Frequency:  $\geq 250\text{k Hz}$

CE



### LOW PROFILE, HIGH RESOLUTION ICP® PRESSURE PROBE, INTEGRAL CABLE

MODEL 112M362

Measurement Range ( $\pm 5\text{ V output}$ ): 50 psi  
Sensitivity: 100 mV/psi  
Resonant Frequency:  $\geq 500\text{k Hz}$

CE



### MICRO ICP® PRESSURE SENSOR, INTEGRAL CABLE, FOR HIGH FREQUENCY OR TOA MEASUREMENTS

MODEL 132B38

Measurement Range ( $\pm 5\text{ V output}$ ): 50 psi  
Sensitivity: 140 mV/psi  
Resonant Frequency:  $\geq 1000\text{k Hz}$

## PIEZORESISTIVE PRESSURE SENSORS

For measurement of short wavelength pressure pulses, micro ICP® pressure sensors feature micro-second response time that accurately measure pressure peaks from fast rising shock waves and very high frequency pressure phenomena. Miniature high sensitivity ICP® probes are used to measure small dynamic pressures such as turbulence, noise, sound, and pulsations, especially in adverse environments. They measure dynamic pressure, but with very high resolution.

CE



### LOW PROFILE PIEZORESISTIVE PRESSURE TRANSDUCER

ENDEVCO MODEL 8515C

15 and 50 psia ranges  
200 mV full range  
Low profile, 0.030 inch thin  
Absolute reference

CE



### MINIATURE PIEZORESISTIVE PRESSURE TRANSDUCER

ENDEVCO MODEL 8510B

1, 2 and 5 psig ranges  
300 mV full scale output  
Rugged, miniature  
Gage



### PIEZORESISTIVE PRESSURE TRANSDUCER

ENDEVCO MODEL 8507C

1, 2 and 5 psig ranges  
300 mV full scale output  
Rugged, miniature  
High resonance frequency  
Temperature compensated

## MINIATURE, 3-CHANNEL, ICP® SIGNAL CONDITIONER

MODEL 485M49



For use with ICP® triaxial accelerometers

18-30 VDC supply voltage

4.0 ( $\pm 1$ ) mA DC supply current for ICP® sensor

1 to 100k Hz frequency response ( $\pm 5\%$ )

1.45H x 2.90W x 0.70D in (36.8H x 73.7W x 17.8D mm)

## SINGLE CHANNEL IN LINE SIGNAL CONDITIONERS



### AIRBORNE CHARGE AMPLIFIER

ENDEVCO MODEL 2680B

Input: PE

Adjustable Gain: 0.1 - 100 mV/pC

Operating Temperature:

-67 to 212 °F (-55 to 100 °C)



### AIRBORNE CHARGE AMPLIFIER

ENDEVCO MODEL 2777A

Input: DIFF PE

Gain: 2 / 10 mV/pC

Operating Temperature:

-5 to 185 °F (-15 to 85 °C)

## PORTABLE SYSTEM VERIFICATION INSTRUMENTS

CE



### HANDHELD SHAKER

MODEL 394C06

Model 394C06 is a small, self-contained, battery powered, vibration exciter specifically designed to conveniently verify accelerometer and vibration system performance. It accepts sensors weighing up to 210 grams and delivers a controlled, 1 g mechanical excitation at 159.2 Hz.

CE



### ACCELEROMETER SIMULATOR

ENDEVCO MODEL 4830B

The 4830B accelerometer simulator is a hand held battery operated signal generator designed specifically to simulate the electrical output of common types of accelerometers. The instrument contains a highly accurate oscillator with an adjustable output level and is ideal for setting up, testing and the diagnosis of faults within data acquisition systems, environmental test systems, or simply as a flexible signal generator.

CE



### ICP® SENSOR SIMULATOR

MODEL 401B04

Model 401B04 ICP® sensor simulator installs in place of an ICP® sensor and accepts test signals from a voltage function generator. The unit serves to verify signal conditioning settings, cable integrity, and tune long lines for optimum system performance. This unit requires power from an ICP® sensor signal conditioner.

## VIBRATION ACCESSORIES

PCB® offers a wide selection of accessories and cables that complement our sensors for testing electric vehicles, hybrid electric vehicles, and internal combustion fuel cell vehicles. See our website for the complete offering of these products.

PCB designs and manufactures many of its own cables and connectors, specializing in custom cables, lengths, and connectors for dynamic testing. In these tough and challenging environments, accuracy depends as much on cables and connectors as it does on transducers. Our engineers are well versed in all the critical parameters in cable and connector designs that can affect signal transmission. As a result, these parameters are carefully optimized in our products to ensure data quality and reliability. When it comes to this kind of in-house custom capability, ordinary commercial cable and transducer companies don't compare.



### 4-CONDUCTOR, SHIELDED, FEP CABLE

MODEL 010GXX

Used with triaxial ICP® accelerometers

General purpose

1/4-28 4-socket plug to (3) BNC plugs



### IP68 4-CONDUCTOR, SHIELDED, FEP CABLE

MODEL 034WXX

Used with triaxial ICP® accelerometers

Low noise

IP68 Rated 1/4-28 4-socket plug to (3) BNC plugs



### IP68 4-CONDUCTOR, SHIELDED, POLYURETHANE CABLE

MODEL 078WXX

Used with triaxial ICP® accelerometers

Rugged, low noise

IP68 Rated 1/4-28 4-socket plug to (3) BNC plugs



### SHIELD GROUNDED TERMINATION

MODEL NF & NV

Connector Style: Triple Splice, BNC/10-32 Plug

Used with triaxial ICP® accelerometers

Grounds 4-conductor shield across triple splice



### LOW NOISE COAXIAL CABLE

SERIES 003CXX

Used with single axis accelerometers

Low noise

10-32 coaxial plug to BNC plug



### 4-CONDUCTOR, SILICONE JACKETED CABLE

ENDEVCO MODEL 3027B

Used with triaxial ICP® accelerometers

Flexible

1/4-28 4-socket plug to pigtail leads



### LOW NOISE COAXIAL CABLE

ENDEVCO MODEL 3090C

-452 to 500°F

Low noise

10-32 plug to 10-32 plug



### ULTRA RUGGED LOW NOISE COAXIAL CABLE

ENDEVCO MODEL 3090CM67

Metallic isolated overbraid for abrasion protection

Aramid reinforcement braid

10-32 SS wire lock hex plug to 10-32 SS wire lock hex plug



**3425 Walden Avenue, Depew, NY 14043 USA**

pcb.com | info@pcb.com | 800 828 8840 | +1 716 684 0001



**10869 NC Highway 903, Halifax, NC 27839 USA**

endevco.com | sales@endevco.com | 866 363 3826

© 2025 PCB Piezotronics - all rights reserved. PCB Piezotronics is a wholly-owned subsidiary of Amphenol Corporation. Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc., which is a wholly-owned subsidiary of PCB Piezotronics, Inc. Accumetrics, Inc. and The Modal Shop, Inc. are wholly-owned subsidiaries of PCB Piezotronics, Inc. IMI Sensors and Larson Davis are Divisions of PCB Piezotronics, Inc. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of PCB Piezotronics, Inc., PCB Piezotronics of North Carolina, Inc. (d/b/a Endevco), The Modal Shop, Inc. or Accumetrics, Inc. Detailed trademark ownership information is available at [www.pcb.com/trademarkownership](http://www.pcb.com/trademarkownership).

AD-FlightTest-0325